Heating & Air Conditioning
Amana
AMERICA'S BRAND FOR COMFORT™

PTAC

Packaged Terminal Air Conditioner

From day one, every Amana® brand product has been made with the same core philosophy: to provide customers with high-quality products that are reliable, meet their needs, and last longer than the rest. And we keep that philosophy firmly in mind as we build our Amana brand Packaged Terminal Air Conditioners (PTACs). Amana brand PTACs are designed to provide your business with plain-and-simple product durability and advanced energy management features, while helping you to create the best indoor comfort possible.

Key Features & Benefits

- **Filter Dryer for Sealed System Refrigerant:**
  Standard in all units to protect the compressor and lengthen the life of the unit by removing moisture and preventing acid formation.
- **Assembled in the USA for over 40 years:**
  Assembled at our plant in Fayetteville, TN, using Goodman resources including engineering, production, and testing.
- **High-Pressure Switch:**
  Protects the unit from high pressure and damage to the unit, helping to ensure long unit life.
- **Compatible with DigiSmart EMS System:**
  The Amana brand PTAC with antenna, combined with the self-installable, wireless thermostat and occupancy sensor give the property owner complete control over the equipment settings and can reduce PTAC energy usage up to 35% OR MORE.*
- **AHRI Certified:**
  All Amana brand PTACs are performance certified through the AHRI (Air Conditioning Hearting & Refrigeration Institute)

PTAC DIRECT SALES, INC.
185 S. Kimball Ave.
Suite 130
Southlake, TX 76092
877.454.7822 (T)
www.PTACdirect.com

PTH123G35AXXX

Product Information

- Heat Pump
- 12,000/12,000 BTU/h Nominal Cooling Capacity
- 11,500/11,300 BTU/h Rev Cycle
- 3.1/3.1 COP
- 3.5/2.9 kW
- 11.0/11.0 EER

- Installed Options:
  - Standard Model

Technical Data (Cooling)

Voltage	230/208 Volt
Capacity	12,000/12,000 BTU/h
Amps	5.8/5.8
Watts	1,090/1,090
EER	11.0/11.0

Technical Data (Electric Heat)

Size	3.5/2.9 kW
Capacity	12,000/9,900 BTU/h
Amps	15.5/14.1
Watts	3,570/2,935
Min Circuit	19.5
MOP	20
Power Cord	6-20P

Technical Data (Operation)

Refrigerant	R-410A
CFM (Cool/Wet)	340/245 (High/Low)
CFM Dry	370/270 (High/Low)
Ventilated Air	65 CFM
Dehumidification	3.6 Pints/Hr

Technical Data (Reverse Cycle)

Voltage	230/208 Volt
Capacity	11,500/11,300 BTU/h
Amps	5.8/5.8
Watts	1,085/1,035
COP	3.1/3.1

Dimensions (Unit)

Length	42"
Width	21 1/2"
Height	16 1/16"
Weight	115 lbs

Dimensions (Ship)

Length	48"
Width	27 1/2"
Height	20 1/16"
Weight	132 lbs



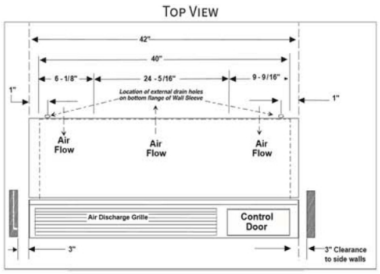

AHRI CERTIFIED® www.ahridirectory.org

Amana PTAC PROUDLY ASSEMBLED IN THE USA FOR OVER 40 YEARS

C ETL LISTED US Intertek

Certificate of Product Ratings

Product Type : PTHP | Date : 05-21-2018 | Model Status : Active

AHRI Certified Reference Number : 8028533

Brand Name : AMANA

Model Number : PTH123G******C*

Rated as follows in accordance with the latest edition of ANSI/AHRI/CSA 310/380-2014: Standard for Packaged Terminal Air-Conditioners and Heat Pumps (CSA-C744-14) and subject to rating accuracy by AHRI-sponsored, independent, third party testing:

Cooling Capacity, btuh : 12000

Cooling Capacity at 230v if dual voltage, btuh : 12000

EER : 11.0

EER at 230v if dual voltage : 11.0

Heating Capacity, btuh : 11300

Heating Capacity at 230v if dual voltage, btuh : 11500

Heating COP : 3.1

COP at 230v if dual voltage : 3.1

†"Active" Model Status are those that an AHRI Certification Program Participant is currently producing AND selling or offering for sale; OR new models that are being marketed but are not yet being produced."Production Stopped" Model Status are those that an AHRI Certification Program Participant is no longer producing BUT is still selling or offering for sale.
Ratings that are accompanied by WAS indicate an involuntary re-rate. The new published rating is shown along with the previous (i.e. WAS) rating.

DISCLAIMER
AHRI does not endorse the product(s) listed on this Certificate and makes no representations, warranties or guarantees as to, and assumes no responsibility for, the product(s) listed on this Certificate. AHRI expressly disclaims all liability for damages of any kind arising out of the use or performance of the product(s), or the unauthorized alteration of data listed on this Certificate. Certified ratings are valid only for models and configurations listed in the directory at www.ahridirectory.org.

TERMS AND CONDITIONS
This Certificate and its contents are proprietary products of AHRI. This Certificate shall only be used for individual, personal and confidential reference purposes. The contents of this Certificate may not, in whole or in part, be reproduced; copied; disseminated; entered into a computer database; or otherwise utilized, in any form or manner or by any means, except for the user's individual, personal and confidential reference.

CERTIFICATE VERIFICATION
The information for the model cited on this certificate can be verified at www.ahridirectory.org, click on "Verify Certificate" link and enter the AHRI Certified Reference Number and the date on which the certificate was issued, which is listed above, and the Certificate No., which is listed at bottom right.

©2018 Air-Conditioning, Heating, and Refrigeration Institute

AIR-CONDITIONING, HEATING, & REFRIGERATION INSTITUTE

we make life better™

CERTIFICATE NO.: 131714031605467131