

PTAC Direct Sales, Inc.
185 S. Kimball Ave., Suite 130
Southlake, TX 76092
877.454.7822 (T)
877.647.6408 (F)

Heating & Air Conditioning
Amana[®]

26" BUILT-IN AIR CONDITIONERS

Through-the-wall design for flush-mount applications
Cooling-only (PBC092G00CC, PBC122G00CC, PBC093G00CC, PBC123G00CC) or
Electric heat (PBE093G35CC, PBE123G35CC) or
Heat pump (PBH092G12CC, PBH073G35CC, PBH093G35CC, PBH113G35CC) models

Wise Decision.
It's an Amana[®] brand.



- **Wired thermostat capable** to allow temperature control of the unit with our standard hardwired thermostats. Requires PBTK01 Low Voltage Interface Kit. Only available for use on "CC" models
- **Electronic touch pad with remote control**
- **High energy efficiency with models up to 10.4 EER** saving you money when compared to lower EER models.
- **Easily removable condenser top** that allows for quick and complete cleaning of outdoor coils. This access for cleaning the outdoor coil enables easy removal of dirt and debris to help lengthen the life of the compressor and other system sealed components. Remove six easy access screws and let the cleaning begin.
- **Easy access slide out filter** has a permanent polypropylene filter mesh that is easy to remove and clean.
- **Accessory wall sleeve: PBWS01A** is a solid-sided, insulated metal sleeve. It includes a stamped aluminum exterior grille with a weather-seal rear enclosure for installation without the chassis. The sleeve has a solid bottom for complete weather-tight installation. An optional PBWMFC can be used when a more permanent weather seal is needed for sleeves installed without the chassis.
- **100% Full factory run test** on all units for high reliability and dependability. Units start the first time — every time.
- **Quiet operation.** Designed with guest comfort in mind — providing reliable, quiet operation for years to come.
- **Easy to set switches** to configure check filter light, temperature limiting capability, and fan auto cycle for heating or cooling.

Amana is a registered trademark of Maytag Corporation or its related companies and is used under license to Goodman Company, L.P., Houston, TX, USA. All rights reserved.

Complete Room Comfort
With Easy-To-Use Controls

	Cooling Only Models				Electric Heat Models			Heat Pump Models			
Amana® brand Model	PBC092G00CC*	PBC122G00CC*	PBC093G00CC*	PBC123G00CC*	PBE093G35CC*	PBE123G35CC*	PBH092G12CC*	PBH073G35CC*	PBH093G35CC*	PBH113G35CC*	

General Features:

Voltage	115	115	230 / 208	230 / 208	230 / 208	230 / 208	115	230 / 208	230 / 208	230 / 208
Approx. chassis weight	74 lbs	80 lbs	71 lbs	78 lbs	73 lbs	81 lbs	78 lbs	76 lbs	83 lbs	86 lbs
Approx. shipping weight	87 lbs	93 lbs	84 lbs	92 lbs	86 lbs	94 lbs	92 lbs	89 lbs	96 lbs	99 lbs
Temperature limiting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Check filter indicator	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Heat and cool fan cycle	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Cooling:

Capacity / BTUH	9,300	11,800	9,300 / 9,100	12,000 / 11,800	9,300 / 9,100	12,000 / 11,800	9,000	7,400 / 7,200	9,300 / 9,100	11,700 / 11,500
Amps	8.7	11.0	4.3 / 4.7	5.7 / 6.1	4.3 / 4.7	5.7 / 6.1	8.4	3.2 / 3.5	4.4 / 4.8	5.6 / 6.1
Watts	950	1,200	950 / 930	1,220 / 1,200	950 / 930	1,220 / 1,200	920	700 / 680	960 / 940	1,220 / 1,200
CFM	275	275	275	275	265	265	265	265	265	265
E.E.R.	9.8	9.8	9.8 / 9.8	9.8 / 9.8	9.8 / 9.8	9.8 / 9.8	9.8	10.4 / 10.4	9.7 / 9.7	9.6 / 9.6
C.E.E.R.	9.7	9.7	9.7 / 9.7	9.7 / 9.7	9.7 / 9.7	9.7 / 9.7	9.7	10.4 / 10.4	9.6 / 9.6	9.5 / 9.5
Dehumidification - pts/hr	2.3	3.4	2.3	3.4	2.3	3.4	2.3	1.4	2.3	3.4

Electric Heat:

Capacity / BTUH	n/a	n/a	n/a	n/a	11,000 / 9,000	11,000 / 9,000	3,900*	11,000 / 9,000	11,000 / 9,000	11,000 / 9,000
Amps	n/a	n/a	n/a	n/a	15.2 / 14.0	15.2 / 14.0	11.0	15.2 / 14.0	15.2 / 14.0	15.2 / 14.0
Watts	n/a	n/a	n/a	n/a	3,500 / 2,900	3,500 / 2,900	1,150	3,500 / 2,900	3,500 / 2,900	3,500 / 2,900

Heat Pump: (Reverse cycle)

Capacity / BTUH	n/a	n/a	n/a	n/a	n/a	n/a	8,500	6,800 / 6,600	8,800 / 8,600	11,400 / 11,200
Amps	n/a	n/a	n/a	n/a	n/a	n/a	7.6	2.9 / 3.2	4.0 / 4.3	5.4 / 5.9
Watts	n/a	n/a	n/a	n/a	n/a	n/a	830	640 / 620	860 / 840	1,160 / 1,140
C.O.P	n/a	n/a	n/a	n/a	n/a	n/a	3.0	3.1 / 3.1	3.0 / 3.0	2.9 / 2.9
Thermostatic drain valve	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Electrical Data:


NEMA plug configuration	5-15P	5-15P	6-15P	6-15P	6-20P	6-20P	5-15P	6-20P	6-20P	6-20P
Plug type	Parallel	Parallel	Tandem	Tandem	Perpendicular	Perpendicular	Parallel	Perpendicular	Perpendicular	Perpendicular
Power cord length	8.0' w/LCDI	8.0' w/LCDI	6.0' w/LCDI	6.0' w/LCDI	6.0' w/LCDI	6.0' w/LCDI	8.0' w/LCDI	6.0' w/LCDI	6.0' w/LCDI	6.0' w/LCDI

Features: (all models)

Agency Approval	U.L. (Underwriters Laboratory) listed; USA and Canada
Chassis Type	Slide-out for easy installation and service accessibility
Fan speeds:	2 speeds: High & Low
Fan ONLY	Yes - High Speed
Exhaust CFM	30
Discharge air	Top discharge with 4-way adjustable air throw
Slide-out-filter	Top Pull-out Polypropylene - Permanent filter that is washable
Condensate	Yes - external drain spout on the PBWS01A optional wall sleeve drain spout

Dimensions:	Height	Width	Depth
Chassis Dimensions:	15 5/8"	26.0"	16 7/8"
With chassis installed		Depth with chassis installed and room front cover attached = 21 7/8"	
Sleeve Cut-outs:	15 13/16"	26 3/16"	Maximum wall thickness = 16 3/8"

Plug Type:

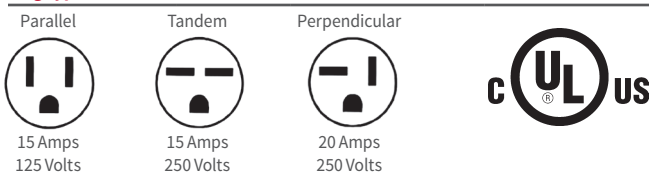

Optional Accessories:

PBTCK01	Low voltage interface for wired thermostat. Only available for use on "CC" models.
PBWS01A	Insulated metal sleeve for installation of 26" Built-In Air Conditioners; solid side and solid bottom with weather board and stamped aluminum grille.
PBAGK01TB	Architectural grille kit for use with PBWS01A sleeve and 26" Built-In Air conditioners in beige.
PBAGK01SB	Architectural grille kit for use with PBWS01A sleeve and 26" Built-In Air conditioners in custom colors
PBWMFC01A	An insulated metal cover for use when PBWS01A is installed without 26" Built-In Air Conditioner
PBFAK01A	Sleeve adapter kit; converts Fedders BSAOOC & Friedrich WSC 27" wall sleeves for use with Amana 26" Built-In Air Conditioners

* All Units Meet or Exceed 06-01-14 D.O.E. CEER Minimums

† Secondary heat source recommended to be used in conjunction with unit during electric heat operation

Note: Units ship without the optional PBWS01A wall sleeve and require a solid-side sleeve for field installation. If installing into existing sleeves, call your Amana brand sales person for compatibility assessment or adapter kits. Damage caused by improper sleeves, or by use of improper grilles, is not covered by the product warranty.

Call your Amana brand PTAC sales representative at **877-454-7822** for complete details.

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer.

www.PTACdirect.com

Our continuing commitment to quality products may mean a change in specifications without notice. © 2014 Goodman Company, L.P. Amana is a registered trademark of Maytag Corporation or its related companies and is used under license to Goodman Company, L.P., Houston, TX, USA. All rights reserved.

CB-TTW4 05-18