

# AZ45E12DBM

## GE Zoneline® Cooling and Electric Heat Unit with Makeup Air, 230/208 Volt

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

#### ELECTRICAL WIRING

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations.

**NOTE:** Aluminum wiring may pose special problems – consult a qualified electrician.

#### GRILLE OPTIONS

Stamped Aluminum Grille – RAG60  
Exterior Architectural Louvers Durable Polycarbonate:  
RAG61 (Beige)                      RAG63 (Dark Brown)  
RAG62 (Maple)  
Extruded Aluminum Architectural Grille – RAG67

#### RETROFIT KITS:


RAK40 – Deflector Kit to adapt chassis for use with existing (non-GE) exterior louvered grilles.

#### ELECTRICAL CONNECTION

230/208 volt units may be plugged into a receptacle. See Architects and Engineers Design Data Manual for electrical connection information including use of sub-base for direct connected units. Installation must comply with local electrical codes and regulations.

Power connection kits are required on all Zoneline chassis.

#### WALL CASE DIMENSIONS

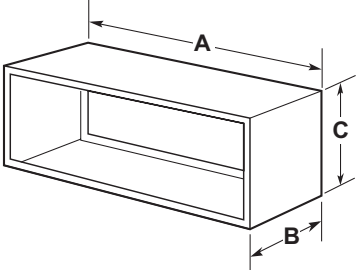

#### RAB71B WALL SLEEVE

Heavy-gauge galvanized steel, with insulation.


A – 42", B – 13-3/4", C – 16"

Also available in 16" and 24" depths

#### RAB77B WALL SLEEVE

Molded SMC fiberglass-reinforced polyester compound.

#### MAXIMUM CORD EXTENSION

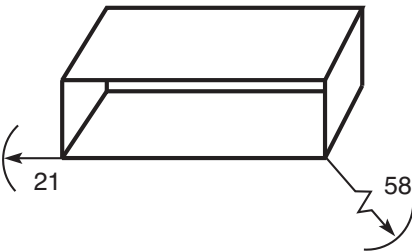

A – 42-1/8", B– 13-7/8", C – 16-1/4"

#### WALL OPENING DIMENSIONS

Add 1/4" to A and C dimensions for all cut-outs.

RAB71B 16-1/4" Min. H x 42-1/4" Min. W

RAB77B 16-1/2" Min. H x 42-3/8" Min. W

AZ45/65 HEATER KW						
230/208 VOLT	LINE CORD (P), DIRECT (D) AND SUB-BASE CONNECTED UNITS					
	7K/9K			12K/15K		
Power Connection Kit	RAK315P RAK315D RAK204D15C	RAK320P RAK320D RAK204D20C	RAK330P RAK330D RAK204D30C	RAK315P RAK315D RAK204D15C	RAK320P RAK320D RAK204D20C	RAK330P RAK330D RAK204D30C
Total Watts	2410/1990	3420/2830	4830/3990	2430/2020	3450/2860	4860/4020
Heater Watts	2400/1960	3400/2780	4800/3930	2400/1960	3400/2780	4800/3930
Heater BTU	8100/6600	11600/9400	16300/13400	8100/6600	11600/9400	16300/13400
Total Amps	10.5/9.6	14.9/13.6	21.0/19.2	10.6/9.7	15.1/13.8	21.2/19.3
Min Circuit	15	20	30	15	20	30
Recommended Protective Device	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	30 amp time-delay fuse or breaker	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	30 amp time-delay fuse or breaker



**PTAC DIRECT SALES, INC.**  
**185 S. KIMBALL AVE., SUITE 130**  
**SOUTHLAKE, TX 76092**  
**877.454.7822**

# AZ45E12DBM

## *GE Zoneline® Cooling and Electric Heat Unit with Makeup Air, 230/208 Volt*

### **FEATURE AND BENEFITS**

Product built to order, lead times may vary

Makeup air – Delivers 25-50 CFM of continuous makeup air whenever the room is occupied

Energy efficiency – When paired with occupancy sensing hardware, ventilation can be halted during vacancy

Dehumidification – Dehumidifies at a rate of 5-6 pints per 24 hours (based on CFM level)

Heat & Freeze Sentinels – Keeps the room from overheating or freezing

Electronic temperature limiting – Prevents expensive over-cooling or over-heating of the room

Electronic touch controls with LED display

May reduce the need for individually ducted rooftop systems

Because makeup air increases room BTU load requirements and requires additional PTAC cooling or heating, the building's electrical needs may be impacted

Makeup air models are not recommended for installation within two miles of coastal areas

It is strongly recommended to install makeup air with wall thermostats

SMC base pan

Simplified structure – Easy to maintain and service

