



BUILT-IN & UNIVERSAL FIT WALL AIR CONDITIONERS



PTAC DIRECT SALES, INC.
185 S. KIMBALL AVE., SUITE 130
SOUTHLAKE, TX 76092
877.454.7822
www.PTACdirect.com


good things, for life.



GE APPLIANCES



SmartHQ™ technology enables individual owners or property managers to control and monitor settings remotely.

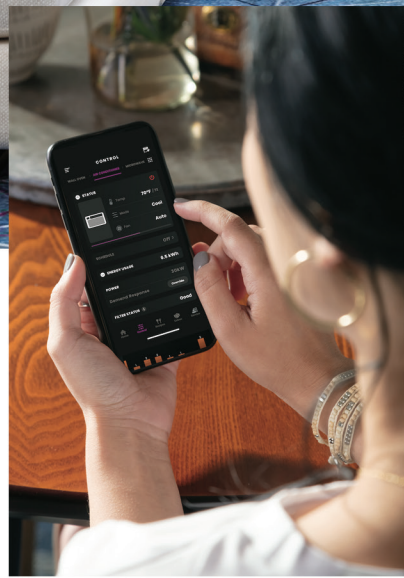



BUILT-IN WALL AIR CONDITIONERS

GE Appliances built-in wall air conditioners offer reliable, efficient, and convenient cooling and heating. True built-in design gives a seamless appearance and a precise fit. Installation flexibility is provided with two unique mounting configurations—standard and our EXCLUSIVE high mount.

GE is committed to reducing our environmental impact. **R32 refrigerant** is available in Built In and Universal Fit models. It has a 30% lower GWP (Global Warming Potential) than R410A and uses 20% less refrigerant.

With WIFI on-board powered by **SmartHQ™**, you can monitor and control your air conditioner on your smart phone or tablet by using the SmartHQ app. Available through the Apple app store and Google play, WIFI capability through internet connectivity enables SmartHQ home automations such as setting a cooling/heating schedule and enabling voice control.

The following features are available on SmartHQ units:



Voice Control capable with Amazon Alexa & Google Home



7-day scheduling to cool or heat your home from anywhere


Monitor energy usage to keep your monthly utility bills at a minimum

Control multiple air conditioners at once in one convenient app

Whether a new build or renovation, choose our new WIFI on-board powered by SmartHQ air conditioners—backed by the brand you know and trust.

In addition to full-featured control via the app, convenient temperature control is made possible via remote control and a built-in timer to power the unit on/off at your choosing.

SmartHQ Management subscription required.

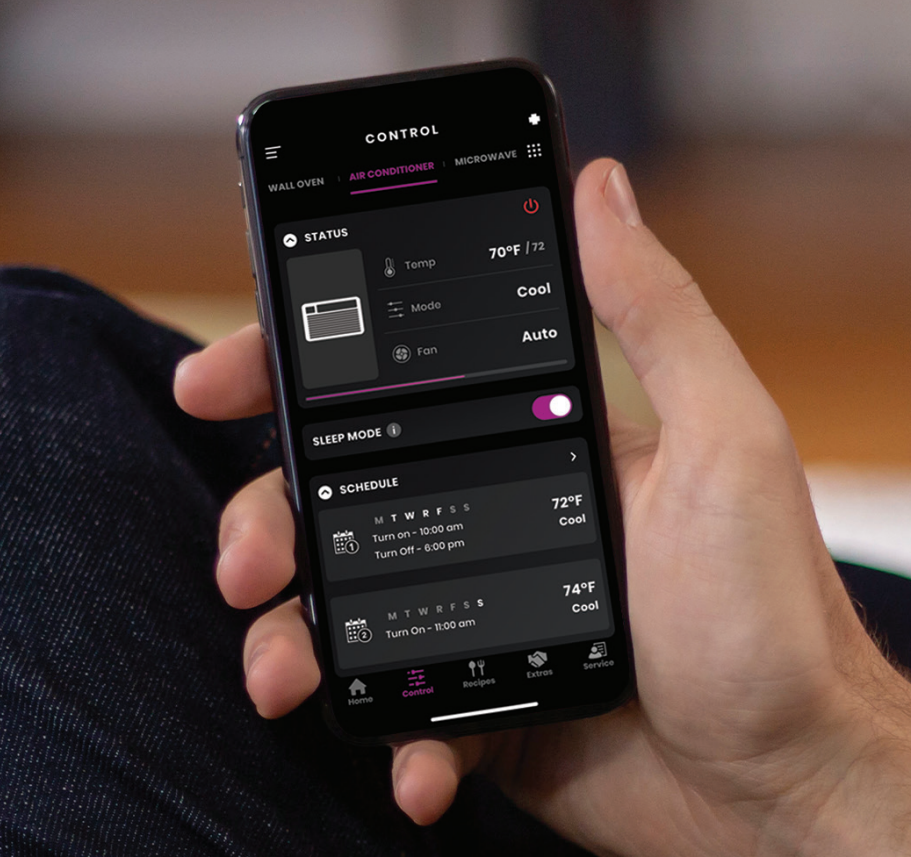

BUILT-IN FEATURE HIGHLIGHTS



TRUE BUILT-IN DESIGN

The ultimate fit & finish for more usable space and the best in built-in installation. Sleeve and chassis are perfectly matched, creating a seamless fit without leaks or gaps.



CORROSION PROTECTION*

Corrosion Protection on heat/cool models use stainless steel screws, special coatings and double coats of paint on key components including coils, base pan, compressor.

*Heat/cool models only.

Keep your place cool, no matter where you are.

With the SmartHQ app, you'll be able to:

- Monitor and control your air conditioner
- Control multiple air conditioners with one app
- Get reminders to clean or change your air conditioner's filter




A MORE SUSTAINABLE REFRIGERANT

R32 is easy to recycle and has a 30% lower GWP than R410A. Its proven track record in Europe has led GE Appliances to choose this refrigerant for their Hotpoint and GE Through-The-Wall Air Conditioners. Like R410A, R32 has a zero ozone depletion potential and is easy to charge and recover. Its increased efficiency over R410A means the air conditioner will use less refrigerant than previous models, thus improving its environmental impact over the life of the product.



ELECTRONIC CAP TOUCH CONTROLS

Controls offer a high-end and smooth to-the-touch panel.

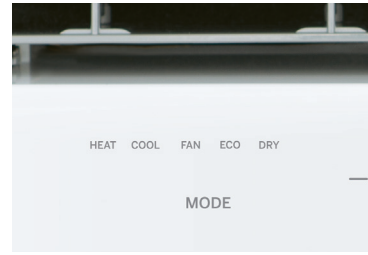

HEAT MODE*

On days when cool air is not needed, the Heat Mode provides a warm and comfortable room temperature.



3 FAN SPEEDS

Select high, medium, low or auto setting to achieve the best in air comfort & ultimate flexibility.



LARGE LCD AUTO-DIMMING DISPLAY

Large, intuitive white LCD display can be easily seen from anywhere in the room. Convenient Auto-Dimming feature via remote promotes ambient lighting during the night.



ECO MODE

Innovative mode where the fan cycles off between cooling intervals, saving energy while keeping the room comfortable.



6-WAY DIRECTIONAL AIRFLOW

Direct where the air flows with up to 6 directional vent adjustments—cooling and/or heating the areas of the room that need it the most.



DRY MODE

Designed for humid environments, it helps provide a dryer & more comfortable environment with room-air dehumidification.



REMOTE CONTROL INCLUDED

Slim, intuitive remote control enables adjusting temperatures and settings conveniently from anywhere in the room.

*Heat/cool models only.

BUILT-IN COOL-ONLY WALL AIR CONDITIONERS

COOL-ONLY UNITS INCLUDE:

- Built-In WiFi powered by SmartHQ™
- 3 fan speeds
- Electronic controls with remote
- Electronic digital thermostat
- Six-way air direction
- Upfront, washable air filter
- Standard-mount and high-mount configurations
- R32 Refrigerant



ADA
COMPLIANT



STANDARD-MOUNT

AJQC06LWJ

6,300 BTU, 11.0 CEER,
115 Volts

AJQC08AWJ

8,200 BTU, 10.6 CEER,
115 Volts

AJQC10AWJ

10,000 BTU, 10.6 CEER,
115 Volts

AJQC12AWJ

12,000 BTU, 10.6 CEER,
115 Volts

AJQC10DWJ

10,300/10,100 BTU, 10.6 CEER,
230-208 Volts

AJQC12DWJ


12,100/11,800 BTU, 10.5 CEER,
230-208 Volts

AJQC14DWJ

13,800/13,400 BTU, 9.5 CEER,
230-208 Volts



ADA
COMPLIANT

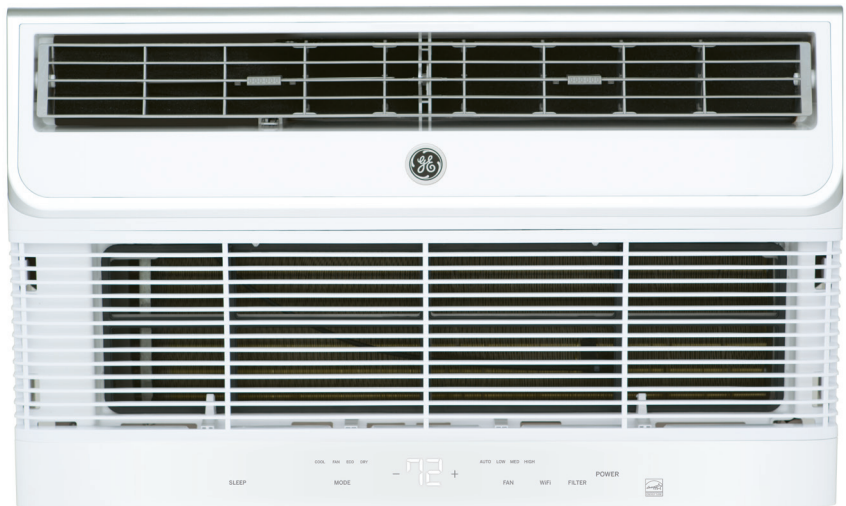

HIGH-MOUNT

AJCM08AWJ

8,200 BTU, 10.6 CEER,
115 Volts

AJCM10AWJ

10,000 BTU, 10.6 CEER,
115 Volts

AJCM10DWJ

10,300/10,100 BTU, 10.6 CEER,
230-208 Volts

AJCM12DWJ

12,000/11,800 BTU, 10.5 CEER,
230-208 Volts

Specifications subject to change.

BUILT-IN HEAT/COOL WALL AIR CONDITIONERS

HEAT/COOL UNITS INCLUDE:

- Built-In WiFi powered by SmartHQ™
- 3 fan speeds
- Electronic controls with remote
- Electronic digital thermostat
- Six-way air direction
- Remote thermostat capable
- Upfront, washable air filter
- Standard-mount and high-mount configurations
- R32 Refrigerant



ADA COMPLIANT



STANDARD-MOUNT

AJEQ08AWJ

8,000 BTU Cool, 4,200 BTU Heat, 9.6 CEER, 115 Volts (Not a primary heat source)

AJEQ10DWJ

10,000/9,800 BTU Cool, 10,600/8,600 BTU Heat, 9.6/9.6 CEER, 230-208 Volts

AJEQ12DWJ

11,800/11,700 BTU Cool, 10,600/8,600 BTU Heat, 9.5/9.5 CEER, 230-208 Volts

AJEQ14DWJ


13,800/13,600 BTU Cool, 10,600/8,600 BTU Heat, 9.5/9.5 CEER, 230-208 Volts



IFTTT



ADA COMPLIANT

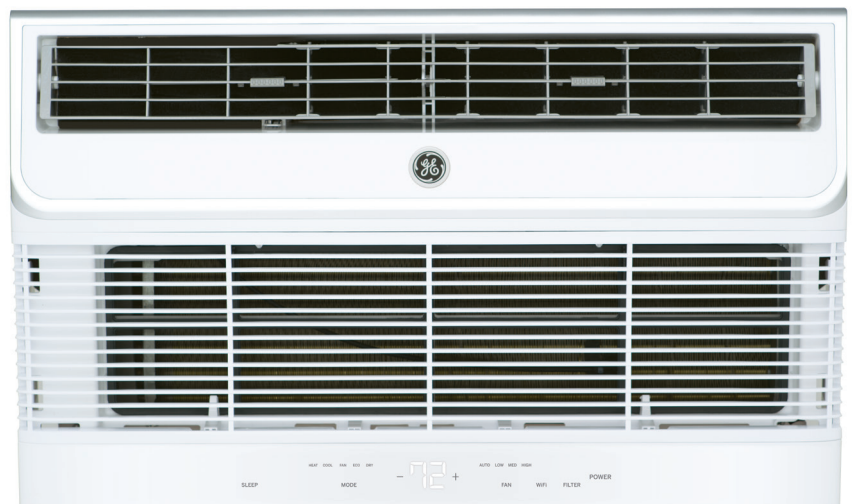

HIGH-MOUNT

AJEM12DWJ

11,800/11,700 BTU Cool, 10,600/8,600 BTU Heat, 9.5 /9.5 CEER, 230-208 Volts

Specifications subject to change.

SPECIFICATIONS

COOL-ONLY

| MODELS | AJCQ06LWJ | AJCQ08AWJ | AJCQ10AWJ | AJCQ12AWJ | AJCQ10DWJ |
|--------------------------------|--|--|---------------------------------------|--|--------------------------------------|
| Built-in WiFi SmartHQ™ | Yes | Yes | Yes | Yes | Yes |
| ADA-Compliant | Yes | Yes | Yes | Yes | Yes |
| Voltage / Hertz / Phase | 115 / 60 / 1 | 115 / 60 / 1 | 115 / 60 / 1 | 115 / 60 / 1 | 230 - 208 / 60 / 1 |
| BTU - AHAM Cooling | 6,300 | 8,200 | 10,000 | 12,000 | 10,300/10,100 |
| Amps - AHAM | 5.5 | 7.8 | 10.0 | 11.3 | 4.7 / 5.1 |
| Watts | 560 | 740 | 890 | 1100 | 940 / 920 |
| EER | 11.0 | 10.6 | 10.6 | 10.6 | 10.6 |
| CEER | 11.0 | 10.6 | 10.6 | 10.6 | 10.6 |
| Dehumid. (Pts/Hr) | 0.87 | 2.22 | 2.73 | 3.6 | 3.57 |
| Refrigerant Type | R32 | R32 | R32 | R32 | R32 |
| Circuit Size (Amps.) | 15 | 15 | 15 | 15 | 15 |
| Line Cord Plug / Configuration | Parallel / NEMA 5-15P Right Angle LCDI | Parallel / NEMA 5-15P Right Angle LCDI | Parallel / NEMA5-15P Right Angle LCDI | Parallel / NEMA 5-15P Right Angle LCDI | Tandem / NEMA 6-15P Right Angle LCDI |
| Electronic Control | Yes | Yes | Yes | Yes | Yes |
| Filter Reminder Function | Yes | Yes | Yes | Yes | Yes |
| Filter Type | Rigid, tilt out / washable | Rigid, tilt out / washable | Rigid, tilt out / washable | Rigid, tilt out / washable | Rigid, tilt out / washable |
| Remote | Yes | Yes | Yes | Yes | Yes |
| Fan Speeds | 3 | 3 | 3 | 3 | 3 |
| Chassis Width, Inches | 26-2/32 | 26-2/32 | 26-2/32 | 26-2/32 | 26-2/32 |
| Chassis Height, Inches | 15-21/32 | 15-21/32 | 15-21/32 | 15-21/32 | 15-21/32 |
| Chassis Depth Inches | 21-2/32 | 21-2/32 | 21-2/32 | 21-2/32 | 21-2/32 |
| Approx. Net Weight (lbs.) | 62 | 64 | 67 | 73 | 67 |
| Approx. Shipping Weight (lbs.) | 72 | 73 | 77 | 83 | 77 |

Specifications subject to change.

HEAT/COOL

HIGH-MOUNT

| MODELS | AJEQ08AWJ | AJEQ10DWJ | AJEQ12DWJ | AJEQ14DWJ | AJEM12DWJ |
|---|--|---|---|---|---|
| Built-in WiFi SmartHQ™ | Yes | Yes | Yes | Yes | Yes |
| ADA-Compliant | Yes | Yes | Yes | Yes | Yes |
| Voltage / Hertz / Phase | 115 / 60 / 1 | 230 - 208 / 60 / 1 | 230 - 208 / 60 / 1 | 230 - 208 / 60 / 1 | 230 - 208 / 60 / 1 |
| BTUH - AHAM Cooling | 8,000 | 10,000 / 9,800 | 11,800 / 11,700 | 13,800 / 13,600 | 11,800 / 11,700 |
| Amps - AHAM | 6.7 | 4.6 / 5.0 | 5.4 / 5.8 | 6.4 / 6.9 | 5.4 / 5.8 |
| WATTS INPUT | 740 | 980 / 960 | 1150 / 1130 | 1410 / 1380 | 1150 / 1130 |
| EER | 10.8 | 10.2 / 10.2 | 10.5 / 10.4 | 9.8 / 9.8 | 10.5 / 10.4 |
| CEER | 9.6 | 9.6 / 9.6 | 9.5 / 9.5 | 9.5 / 9.5 | 9.5 / 9.5 |
| Dehumidification (Pts/Hr) | 1.9 | 2.7 / 2.7 | 3.4 / 3.4 | 3.8 / 3.8 | 3.4 / 3.4 |
| BTU Heating | 4,200 | 10,600 / 8,600 | 10,600 / 8,600 | 10,600 / 8,600 | 10,600 / 8,600 |
| Heating Amps | 11.8 | 15 / 13.5 | 15 / 13.5 | 15 / 13.5 | 15 / 13.5 |
| Heating Watts | 1,320 | 3,450 / 2,821 | 3,450 / 2,821 | 3,450 / 2,821 | 3,450 / 2,821 |
| Refrigerant Type | R32 | R32 | R32 | R32 | R32 |
| Electronic Control | Yes | Yes | Yes | Yes | Yes |
| Remote Control | Yes | Yes | Yes | Yes | Yes |
| 24VAC Wall Thermostat Capable (RAK164D2, RAK164P2) - 8 Pin Quick Disconnect | YES | YES | YES | YES | YES |
| Line Cord Plug / Configuration | Parallel / NEMA 5-15P Right Angle LCDI | Perpendicular NEMA 6-20P Right Angle LCDI | Perpendicular NEMA 6-20P Right Angle LCDI | Perpendicular NEMA 6-20P Right Angle LCDI | Perpendicular NEMA 6-20P Right Angle LCDI |
| Fan Speeds | 3 | 3 | 3 | 3 | 3 |
| Centered Rear Condenser Coil - Compatible with RAG13/RAG13A / RAG14E Grille | YES | YES | YES | YES | YES |
| Chassis Width, Inches | 26-2/32 | 26-2/32 | 26-2/32 | 26-2/32 | 26-2/32 |
| Chassis Height, Inches | 15-21/32 | 15-21/32 | 15-21/32 | 15-21/32 | 15-21/32 |
| Chassis Depth | 21-2/32 | 21-2/32 | 21-2/32 | 21-2/32 | 21-2/32 |
| Approx. Net Weight (lbs.) | 66 | 69 | 79 | 79 | 79 |
| Approx. Shipping Weight (lbs.) | 76 | 80 | 89 | 89 | 89 |


All 230/208V cooling units with electric heat models are corrosion treated. Design subject to change without notice. Specifications subject to change. For complete specifications visit geappliances.com.

SPECIFICATIONS


| HIGH-MOUNT | | | | | |
|---|---|---|---|---|---|
| AJCQ12DWJ | AJCQ14DWJ | AJCM08AWJ | AJCM10AWJ | AJCM10DWJ | AJCM12DWJ |
| Yes | Yes | Yes | Yes | Yes | Yes |
| Yes | Yes | Yes | Yes | Yes | Yes |
| 230 - 208 / 60 / 1 | 230 - 208 / 60 / 1 | 115 / 60 / 1 | 115 / 60 / 1 | 230 - 208 / 60 / 1 | 230 - 208 / 60 / 1 |
| 12,100 / 11,800 | 13,800 / 13,400 | 8,200 | 10,000 | 10,300 / 10,100 | 12,100 / 11,800 |
| 5.6 / 6.3 | 7.0 / 7.7 | 7.8 | 10 | 4.7 / 5.1 | 5.6 / 6.3 |
| 1120 / 1090 | 1390 / 1340 | 740 | 890 | 940 / 920 | 1120 / 1090 |
| 10.5 | 9.3/9.5 | 10.6 | 10.6 | 10.6 | 10.5/10.5 |
| 10.5 | 9.5 | 10.6 | 10.6 | 10.6 | 10.5 |
| 3.57 | 4.4 | 2.22 | 2.73 | 2.75 | 3.57 |
| R32 | R32 | R32 | R32 | R32 | R32 |
| 15 | 15 | 15 | 15 | 15 | 15 |
| Tandem / NEMA 6-15P Right Angle LCDI | Tandem / NEMA 6-15P Right Angle LCDI | Parallel / NEMA 5-15P Right Angle LCDI | Parallel / NEMA 5-15P Right Angle LCDI | Tandem / NEMA 6-15P Right Angle LCDI | Tandem / NEMA 6-15P Right Angle LCDI |
| Yes | Yes | Yes | Yes | Yes | Yes |
| Yes | Yes | Yes | Yes | Yes | Yes |
| Rigid, tilt out / washable | Rigid, tilt out / washable | Rigid, tilt out / washable | Rigid, tilt out / washable | Rigid, tilt out / washable | Rigid, tilt out / washable |
| Yes | Yes | Yes | Yes | Yes | Yes |
| 3 | 3 | 3 | 3 | 3 | 3 |
| 26-2/32 | 26-2/32 | 26-2/32 | 26-2/32 | 26-2/32 | 26-2/32 |
| 15-21/32 | 15-21/32 | 15-21/32 | 15-21/32 | 15-21/32 | 15-21/32 |
| 21-2/32 | 21-2/32 | 21-2/32 | 21-2/32 | 21-2/32 | 21-2/32 |
| 74 | 74 | 64 | 67 | 67 | 74 |
| 84 | 84 | 73 | 77 | 77 | 84 |

BUILT-IN WALL AIR CONDITIONER


APPLICATIONS



Frame Construction



Brick Block and Brick Frame Construction


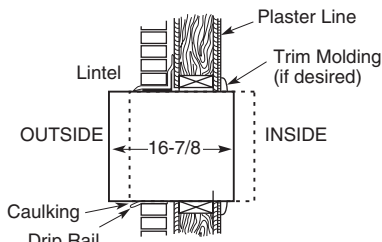


Flexible Mounting Position

OPENING FOR WALL SLEEVE RAB26A

A finished opening of 26-1/8" x 15-3/4", clear of intrusions, is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.

Note: Units should be caulked on all four sides of case to the building exterior to assure building integrity.

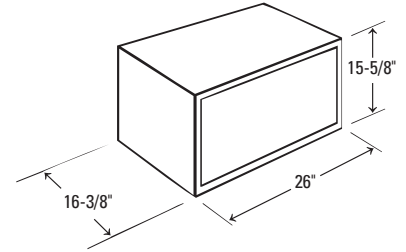

RAK26TO ADDITIONAL PANELS FOR 26" SLEEVE TENANT OPTION


- Compatible with RAB26A, RAB46A, RAB46B and RAB48B wall sleeves
- Use when wall sleeve is installed without a chassis to close off the interior from the outside elements
- Includes indoor steel insulated panel, vinyl weather barrier and hardware



RAB26A Wall Sleeve


- Universal design
- Heavy gauge construction
- Pre-installed gasketing on all sides ensures a tight seal
- Insulated side & top panels
- 4 PC "Quick Snap" design—short assembly required
- Uses RAD10 drain kit
- Color matched white
- RAK26TO Tenant option kit available
- RAG13A stamped aluminum grille included

PARTS & ACCESSORIES

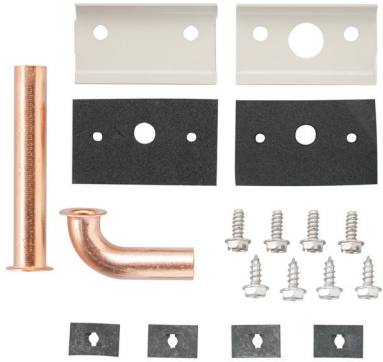


RAD10 Internal/External Drain Kit

- For use on RAB26A wall sleeves
- Routes condensate to exterior or interior of building through wall case
- Suitable provision (field supplied) should be made to connect the drain tube to a drain system in the building
- 1/2" OD copper assemblies include short right-angle tube and 3"-long straight tube
- NOT compatible with RAG14E exterior grille. Use of this grille would require the use of the internal tube configuration to drain the unit assure building integrity.

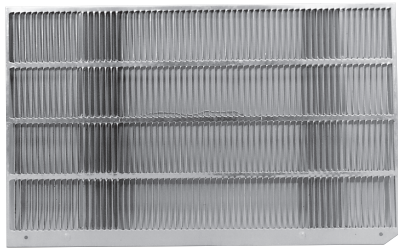

RAG13A Stamped Aluminum Exterior Grille For J Series

- Maximizes efficiency and capacity of new chassis
- Included with new wall case RAB26A

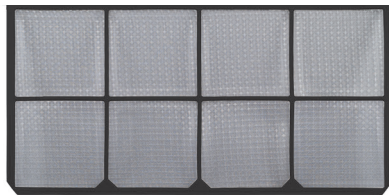

RAA85 Replacement Filter for AJ Models

- Convenient, washable slide-in filter



RAG14E/RAG26AA Architectural Louvered Exterior Grille For J Series

- Extruded aluminum grille for application with RAB26A and older sleeves
- NOT compatible with RAD4A1 and RAD10 EXTERNAL drain kits. Use of this grille would require the use of the internal tube configuration to drain the unit



RAK27 27" WSE Wall Sleeve Trim Kit

Applied to 27" WSE Sleeve for a seamless fit

(Sleeve not included with kit)



RAK27 Trim kit includes:

- 3-sided trim frame
- 1 top gasket
- 2 side gaskets
- 2 rear gaskets
- 6 screws
- 2 edge panel clip nuts
- Installation instructions



UNIVERSAL FIT WALL AIR CONDITIONERS FEATURE HIGHLIGHTS



UNIVERSAL FIT

Simple slide-in installation is made for a precise fit into a variety of different wall sleeves. **Trim kit and installation kit included.**



6-WAY DIRECTIONAL AIRFLOW

Direct where the air flows with up to 6 directional vent adjustments—cooling and/or heating the areas of the room that need it the most.

STAY COOL

Cooling comfort is now easy to enjoy and install with Universal Fit wall air conditioners.

Simple slide-in installation provides a precise fit into a variety of different wall sleeves.



A MORE SUSTAINABLE REFRIGERANT

R32 is easy to recycle and has a 30% lower GWP than R410A. Its proven track record in Europe has led GE Appliances to choose this refrigerant for their Hotpoint and GE Through-The-Wall Air Conditioners. Like R410A, R32 has a zero ozone depletion potential and is easy to charge and recover. Its increased efficiency over R410A means the air conditioner will use less refrigerant than previous models, thus improving its environmental impact over the life of the product.




ECO MODE

Innovative mode where the fan cycles off between cooling intervals, saving energy while keeping the room comfortable.



DRY MODE

Designed for humid environments, it helps provide a dryer & more comfortable environment with room-air dehumidification.



3-FAN SPEEDS

Select high, medium, low or auto setting to achieve the best in air comfort & ultimate flexibility.

PARTS & ACCESSORIES



RAB24 QUICK SNAP WALL SLEEVE

- Universal design
- Heavy gauge construction




EXTERIOR GRILLE

Stamped aluminum exterior grille for the RAB24 Quick Snap Wall Sleeve is included with the chassis.



TRIM RING

Decorative trim included with unit, is used when chassis is installed on existing wall sleeves with different widths.



RAD10 DRAIN KIT

- Fits RAB24 wall sleeve
- Routes condensate to exterior or interior of the building
- 1/2" OD copper assemblies includes short right-angle tube and 3"-long straight tube
- Must be ordered separately

OTHER COMPONENTS

Also included with the product and used on existing 24" wall sleeves are:

- Foam pieces for filling gaps
- Security brackets
- Grounding wire

UNIVERSAL FIT COOL ONLY AIR CONDITIONERS

COOL-ONLY UNITS INCLUDE:

- 3 fan speeds
- Electronic controls with remote
- Six-way air direction
- 24-hour timer
- ECO, DRY, AUTO modes
- R32 Refrigerant



AKCQ08ACJ
8,200 BTU, 10.6 CEER,
115 Volts

AKCQ10ACJ
10,000 BTU, 10.6 CEER,
115 Volts

AKCQ12ACJ
12,000 BTU, 10.5 CEER,
115 Volts


AKCQ10DCJ
10,300/10,100 BTU, 10.6/10.6 CEER,
230-208 Volts

AKCQ12DCJ
12,100/11,800 BTU, 10.5/10.5 CEER,
230-208 Volts

AKCQ14DCJ
13,800/13,400 BTU, 9.3/9.3 CEER,
230-208 Volts

HEAT-COOL UNITS INCLUDE:

- 3 fan speeds
- Electronic controls with remote
- Six-way air direction
- 24-hour timer
- Electric heat
- ECO, DRY, AUTO modes
- R32 Refrigerant

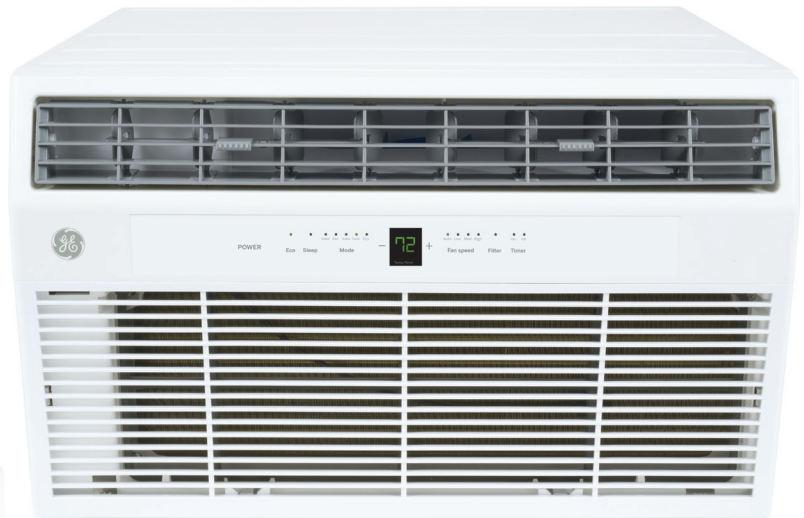

AKEQ10DCJ
10,000/9,900 BTU, 9.6/9.6 CEER,
230-208 Volts

AKEQ12DCJ
11,800/11,700 BTU, 9.5/9.5 CEER,
230-208 Volts

AKEQ14DCJ
13,800/13,600 BTU, 9.5/9.5 CEER,
230-208 Volts

SPECIFICATIONS

COOL-ONLY

| MODELS | AKCQ08ACJ | AKCQ10ACJ | AKCQ12ACJ | AKCQ10DCJ | AKCQ12DCJ | AKCQ14DCJ |
|---|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Voltage - Frequency (Hz) | 115 - 60 | 115 - 60 | 115 - 60 | 230 - 208 - 60 | 230 - 208 - 60 | 230 - 208 - 60 |
| BTUH - AHAM | 8,200 | 10,000 | 12,000 | 10,300 / 10,100 | 12,100 / 11,800 | 13,800 / 13,400 |
| Amps- AHAM | 7.1 | 8.3 | 10.0 | 4.5 / 4.8 | 5.2 / 5.6 | 6.9 / 7.5 |
| EER | 10.6 | 10.6 | 10.5 | 10.6 / 10.6 | 10.5 / 10.5 | 9.3 |
| CEER | 10.6 | 10.6 | 10.5 | 10.6 / 10.6 | 10.5 / 10.5 | 9.3 |
| Dehumidification (Pints/Hr) | 1.6 | 2.5 | 3.4 | 2.7 | 3.6 | 4.2 |
| Refrigerant Type/Capacity | R32 10.93 oz. | R32 15.52 oz. | R32 17.28 oz. | R32 14.29 oz. | R32 16.58 oz. | R32 17.99 oz. |
| Fan Speeds | 3 | 3 | 3 | 3 | 3 | 3 |
| Air Flow Volume (CFM) | | | | | | |
| High | 270 | 256 | 272 | 291 | 274 | 280 |
| Med | 232 | 220 | 250 | 272 | 258 | 264 |
| Low | 202 | 191 | 250 | 248 | 237 | 245 |
| Compressor Type | Rotary | Rotary | Rotary | Rotary | Rotary | Rotary |
| Plug Capacity (15A Circuit Size) | 125V / 120V / 15A | 125V / 120V / 15A | 125V / 120V / 15A | 240V / 250V / 15A | 240V / 250V / 15A | 240V / 250V / 15A |
| Line Cord Plug / Configuration | A / 5-15P | A / 5-15P | A / 5-15P | B / 6-15P | B / 6-15P | B / 6-15P |
| On/Off Timer (24 Hour) | Yes | Yes | Yes | Yes | Yes | Yes |
| Energy Saver (Eco Mode) | Yes | Yes | Yes | Yes | Yes | Yes |
| Auto Fan | Yes | Yes | Yes | Yes | Yes | Yes |
| Dehumidify Function | Yes | Yes | Yes | Yes | Yes | Yes |
| Sleep Mode | Yes | Yes | Yes | Yes | Yes | Yes |
| Wall Sleeve (Sold Separately) - RAB24, RAB26*, RAB46*, RAB48* | Optional, Not Included | Optional, Not Included | Optional, Not Included | Optional, Not Included | Optional, Not Included | Optional, Not Included |
| Dimensions & Installation | Wall | Wall | Wall | Wall | Wall | Wall |
| Wall Case Required | Yes | Yes | Yes | Yes | Yes | Yes |
| Unit Dimensions (Inches) | | | | | | |
| Width | 24 4/19 | 24 4/19 | 24 4/19 | 24 4/19 | 24 4/19 | 24 4/19 |
| Height | 14 9/17 | 14 9/17 | 14 9/17 | 14 9/17 | 14 9/17 | 14 9/17 |
| Depth | 19 | 19 | 19 | 19 | 19 | 19 |
| Net Weight (lbs.) | 66 | 69 | 77 | 69 | 76 | 77 |
| Approx. Shipping Wt. (lbs.) | 77 | 81 | 88 | 81 | 87 | 89 |


HEAT COOL MODELS

| MODELS | AKEQ10DCJ | AKEQ12DCJ | AKEQ14DCJ |
|---|------------------------|------------------------|------------------------|
| Voltage - Frequency (Hz) | 230 - 208 - 60 | 230 - 208 - 60 | 230 - 208 - 60 |
| BTUH - AHAM | 10,000 / 9,900 | 11,800 / 11,700 | 13,800 / 13,600 |
| Amps- AHAM | 4.8 / 5.1 | 5.6 / 6.0 | 6.5 / 7.0 |
| EER | 10 / 10 | 10 / 10.1 | 9.8 / 9.8 |
| CEER | 9.6 / 9.6 | 9.5 / 9.5 | 9.5 / 9.5 |
| Dehumidification (Pints/Hr) | 3.0 | 3.6 | 3.6 |
| Refrigerant Type/Capacity | R32 14.29 oz. | R32 17.28 oz. | R32 19.4 oz. |
| Resistance Heat BTU | 10,600 / 8,600 | 10,600 / 8,600 | 10,600 / 8,600 |
| Resistance Heat AMP | 15 / 13.5 | 15 / 13.5 | 15 / 13.5 |
| Resistance Heat WATTS | 3450 / 2821 | 3450 / 2821 | 3450 / 2821 |
| Fan Speeds | 3 | 3 | 3 |
| Air Flow Volume (CFM) | | | |
| High | 292 | 286 | 282 |
| Med | 275 | 264 | 263 |
| Low | 252 | 240 | 244 |
| Compressor Type | Rotary | Rotary | Rotary |
| Plug Capacity (15A Circuit Size) | 240V / 20A | 240V / 20A | 240V / 20A |
| Line Cord Plug / Configuration | 6-20P | 6-20P | 6-20P |
| On/Off Timer (24 Hour) | Yes | Yes | Yes |
| Energy Saver (Eco Mode) | Yes | Yes | Yes |
| Auto Fan | Yes | Yes | Yes |
| Dehumidify Function | Yes | Yes | Yes |
| Sleep Mode | Yes | Yes | Yes |
| Wall Sleeve (Sold Separately) - RAB24, RAB26*, RAB46*, RAB48* | Optional, Not Included | Optional, Not Included | Optional, Not Included |
| Dimensions & Installation | Wall | Wall | Wall |
| Wall Case Required | Yes | Yes | Yes |
| Unit Dimensions (Inches) | | | |
| Width | 24 4/19 | 24 4/19 | 24 4/19 |
| Height | 14 9/17 | 14 9/17 | 14 9/17 |
| Depth | 19 | 19 | 19 |
| Net Weight (lbs.) | 69 | 79 | 80 |
| Approx. Shipping Wt. (lbs.) | 80 | 90 | 91 |


*Must use provided trim kit

BUILT-IN WALL AIR CONDITIONERS NOMENCLATURE

The built-in air conditioner chassis is identified by a model number defining the type of unit, cooling capacity, electrical information and optional features included on the unit. When specifying or ordering the built-in air conditioner chassis, use of this nomenclature will assure receiving the correct unit.

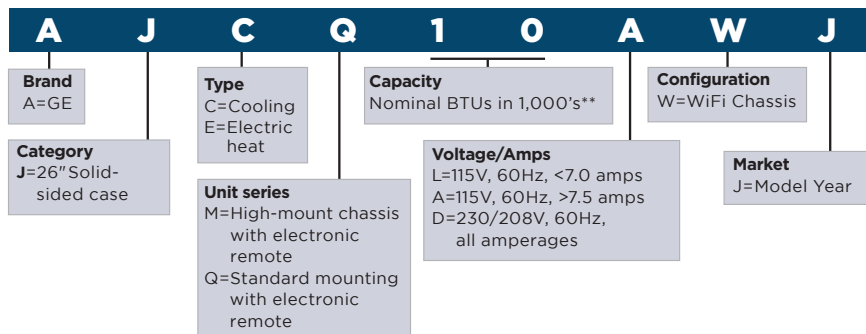

UNIVERSAL FIT AIR CONDITIONERS NOMENCLATURE

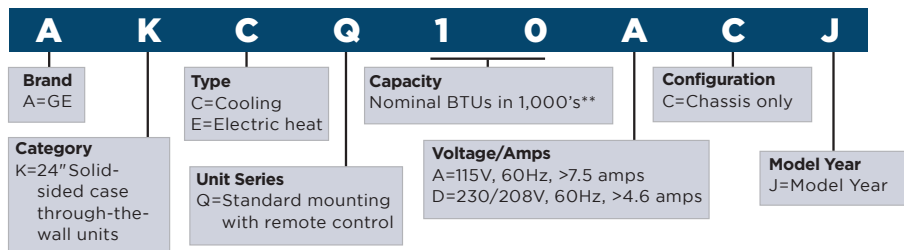

GE APPLIANCES BUILT-IN WALL AIR CONDITIONERS WARRANTY*

| FOR THE PERIOD OF | GE APPLIANCES WILL REPLACE |
|---|--|
| TWO YEARS From the date of the original purchase | Any part of the air conditioner which fails due to a defect in materials or workmanship. During this limited two-year warranty , GE Appliances will provide, free of charge , all labor and related service costs to replace the defective part. |
| FIVE YEARS From the date of the original purchase | Sealed Refrigerating System – if the Sealed Refrigerating System (compressor, condenser, evaporator, and all connecting tubing) should fail due to a defect in materials or workmanship. During this limited five-year warranty , GE Appliances will provide, free of charge , all labor and related service costs to replace the defective part. |

GE APPLIANCES UNIVERSAL FIT AIR CONDITIONERS WARRANTY*

| FOR THE PERIOD OF | GE APPLIANCES WILL REPLACE |
|--|--|
| TWO YEARS From the date of the original purchase | Any part of the air conditioner which fails due to a defect in materials or workmanship. During this limited two-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part. |

*See written warranty for complete details.

**Approximate—see product specs for actual performance.



PTAC DIRECT SALES, INC.
185 S. KIMBALL AVE., SUITE 130
SOUTHLAKE, TX 76092
877.454.7822
www.PTACdirect.com



GE APPLIANCES
a Haier company

GE is a trademark of the General Electric Company.
 Manufactured under trademark license.

Appliance Park
 Louisville, KY 40225
 geappliances.com
 © 2023 GE Appliances
 OTGEA5063007504