

PTAC Direct Sales, Inc. 185
S. Kimball Ave. Suite 130
Southlake, TX 76092
877.454.7822 (T)

PACKAGED TERMINAL AIR CONDITIONERS

Expect comfort, reliability and easy maintenance
from one of the toughest names in the industry.



Hotpoint® America's hardest working appliances.

WE'RE BUILDING ON A STRONG REPUTATION.

Since 1903, Hotpoint® has created appliances that get the job done right. In fact, we invented the Packaged Terminal Air Conditioner category back in the 1960s.

Today, Hotpoint PTACs continue that tradition with affordable, dependable units that offer Electric Heat and Heat Pump with Backup Electric Heat options. Our latest features enhance guest comfort and simplify installation & maintenance. And—after extensive product testing from our engineers—you can expect these durable Hotpoint PTACs to provide years of reliable service.

DESIGNED FOR DEPENDABILITY

No matter how it feels outside, Hotpoint® PTACs are engineered with durable materials to provide unwavering comfort inside.

3-Speed Fan

Give guests control over their comfort with three fan speeds to choose from.

4 Temperature-Limiting Options

Easily select one of four temperature ranges for peak efficiency and total customer comfort.

Intuitive Display

Allow guests to easily customize their preferred settings and reduce maintenance calls with an easy-to-use control panel.

Power Cord Included

230/208 Volt Hotpoint PTACs come with everything needed for a quick and easy installation*.

Automatic Emergency Heat

Keep guests comfortable with a heating option that automatically kicks in when temperatures drop and heat pumps shut down.

Freeze and Frost Protection

Automatic indoor frost control keeps units operating in peak condition.

Auto Power Recovery

In case of power failures, units automatically resume their operation when power restores, reducing maintenance calls.

Self-Diagnostics

Quickly and easily identify service needs with a nine-point diagnostic code system.

Constant Fan Button

Gives guests the option of running the indoor fan continuously even if the unit is in off mode.



*265 volt units must follow NEC requirements for power connection.



PROVIDE TOTAL COMFORT WITH COMPLETE CONFIDENCE

1-YEAR FULL PARTS & LABOR WARRANTY

Protected for 1 year after original date of purchase

Hotpoint® will provide—free of charge—all labor and related service costs to replace any part of the air conditioner which fails due to a defect in materials or workmanship.

2–5-YEAR LIMITED WARRANTY

Protected for 2–5 years after original date of purchase

Hotpoint will provide—free of charge—all labor and related service costs to replace any part of the Sealed Refrigerating System (the compressor, condenser, evaporator and connecting tubing) which fails due to a defect in materials or workmanship.

5-YEAR LIMITED WARRANTY


Protected for 5 years after original date of purchase

Hotpoint will provide—free of charge—a replacement part for fan motors, switches, heater, heater protectors, compressor overload, solenoids, circuit boards, auxiliary controls, thermistors, freeze sentinel, frost controls, capacitors, varistors and indoor blower bearing, if this part fails due to a defect in materials or workmanship. Customers will be responsible for any labor and related service costs.

ADDITIONAL FEATURES

- ◆ 24 VAC Remote wall thermostat compatibility
- ◆ Works with central desk control systems
- ◆ Energy-efficient heat pump models available
- ◆ Tangential fan for smooth airflow and sound
- ◆ Heat pump models include staged heating
- ◆ Removable filters for easy maintenance

HOTPOINT PTAC NOMENCLATURE

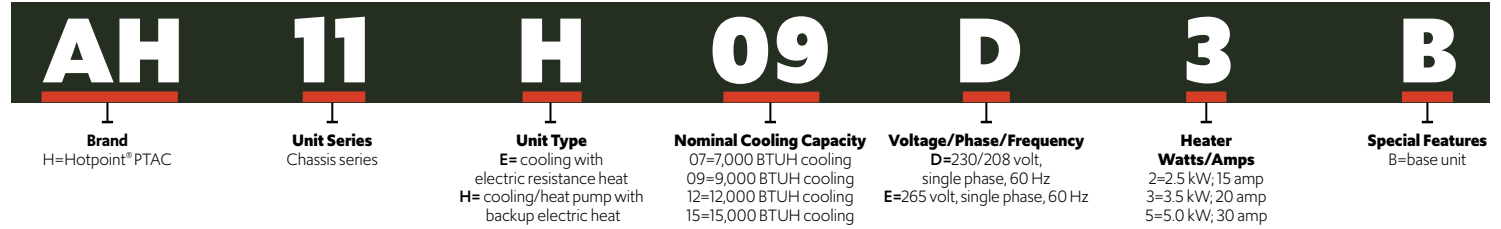

HOTPOINT COOL SERIES

	HOTPOINT 230/208V							
	COOLING WITH ELECTRIC RESISTANCE HEAT							
	AH11E07D2B	AH11E07D3B	AH11E09D2B	AH11E09D3B	AH11E12D3B	AH11E12D5B	AH11E15D3B	AH11E15D5B
Voltage	230/208	230/208	230/208	230/208	230/208	230/208	230/208	230/208
COOLING CAPACITY								
Cooling BTUH	7,200/7,000	7,200/7,000	9,200/9,000	9,200/9,000	12,000/11,800	12,000/11,800	14,500/14,400	14,500/14,400
EER (BTU/Watt)	11.9	11.9	11.3	11.3	10.7	10.7	9.7	9.7
Heater Watts	2,500/2,050	3,500/2,900	2,500/2,050	3,500/2,900	3,500/2,900	5,000/4,090	3,500/2,900	5,000/4,090
Total Electric Heating Watts	2,535/2,080	3,535/2,935	2,535/2,080	3,535/2,935	3,535/2,935	5,035/4,125	3,535/2,935	5,035/4,125
FEATURES								
Refrigerant Type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
Electronic Controls	◆	◆	◆	◆	◆	◆	◆	◆
LCDI Power Cord	◆	◆	◆	◆	◆	◆	◆	◆
Remote Thermostat Capable	◆	◆	◆	◆	◆	◆	◆	◆
Slide-In Chassis	◆	◆	◆	◆	◆	◆	◆	◆
Discharge Grille	1-position	1-position	1-position	1-position	1-position	1-position	1-position	1-position
Fan Motors	2	2	2	2	2	2	2	2
Fan Speeds	3	3	3	3	3	3	3	3
Heat - Cool	◆	◆	◆	◆	◆	◆	◆	◆
Rotary Compressor	◆	◆	◆	◆	◆	◆	◆	◆
Fan Cycle Control	◆	◆	◆	◆	◆	◆	◆	◆
Freeze Control	◆	◆	◆	◆	◆	◆	◆	◆
Automatic Indoor Frost Control	◆	◆	◆	◆	◆	◆	◆	◆
Auto Power Recovery	◆	◆	◆	◆	◆	◆	◆	◆
Central Desk Control Capable	◆	◆	◆	◆	◆	◆	◆	◆
Fresh Air Vent	Concealed Manual Vent Control / Vent Air Filter							
WEIGHT & DIMENSIONS								
Overall Dimensions (including room cover) (WxHxD in.)	42 x 16 x 21							
Net Weight	102 lb	102 lb	98 lb	98 lb	109 lb	109 lb	113 lb	113 lb
Approximate Shipping Weight	112 lb	112 lb	109 lb	109 lb	120 lb	120 lb	123 lb	123 lb

HOTPOINT HEAT PUMP SERIES

	HOTPOINT 230/208V								HOTPOINT 265V*	
	HEAT PUMP WITH ELECTRIC RESISTANCE HEAT BACKUP									
	AH11H07D2B	AH11H07D3B	AH11H09D2B	AH11H09D3B	AH11H12D3B	AH11H12D5B	AH11H15D3B	AH11H15D5B	AH11H09E3B	AH11H12E3B
Voltage	230/208	230/208	230/208	230/208	230/208	230/208	230/208	230/208	265	265
COOLING CAPACITY										
Cooling BTUH	7,200/6,800	7,200/6,800	9,000/8,800	9,000/8,800	12,000/11,800	12,000/11,800	14,700/14,500	14,700/14,500	9,000	12,000
EER (BTU/Watt)	11.9	11.9	11.4	11.4	10.5	10.5	9.7	9.7	11.3	10.5
Heating HP BTUH	6,000/5,800	6,000/5,800	8,100/7,900	8,100/7,900	10,800/10,500	10,800/10,500	13,500/13,200	13,500/13,200	8,100	10,800
COP	3.4	3.4	3.4	3.4	3.2	3.2	3.0	3.0	3.3	3.2
Heater Watts	2,500/2,050	3,500/2,900	2,500/2,050	3,500/2,900	3,500/2,900	5,000/4,100	3,500/2,900	5,000/4,100	3,500	3,500
Total Electric Heating Watts	2,535/2,080	3,535/2,935	2,535/2,080	3,535/2,935	3,535/2,935	5,035/4,125	3,535/2,935	5,035/4,125	3,535	3,535
FEATURES										
Refrigerant Type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
Electronic Controls	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
LCDI Power Cord	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Remote Thermostat Capable	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Slide-In Chassis	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Discharge Grille	1-position	1-position	1-position	1-position	1-position	1-position	1-position	1-position	1-position	1-position
Fan Motors	2	2	2	2	2	2	2	2	2	2
Fan Speeds	3	3	3	3	3	3	3	3	3	3
Heat - Cool	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Rotary Compressor	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Fan Cycle Control	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Freeze Control	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Automatic Indoor Frost Control	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Automatic Emergency Heat	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Auto Power Recovery	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Central Desk Control Capable	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Fresh Air Vent	Concealed Manual Vent Control / Vent Air Filter									
WEIGHT & DIMENSIONS										
Overall Dimensions (including room cover) (WxHxD in.)	42 x 16 x 21									
Net Weight	105 lb	105 lb	103 lb	103 lb	116 lb	116 lb	117 lb	117 lb	102 lb	113 lb
Approximate Shipping Weight	116 lb	116 lb	113 lb	113 lb	125 lb	125 lb	127 lb	127 lb	112 lb	127 lb

*A sub-base (sold separately) and chaseway (included with unit) connects sub-base to junction box on unit and is required when installing 265V models. Failure to do so will NOT meet NEC code and compliance.



Hotpoint Wall Thermostat RAK148H2



Hotpoint Wall Case RAB80



Hotpoint Grille RAG70



Hotpoint Filter RAA70



Hotpoint Curtain Guard RAK44



AIR&WATER
SOLUTIONS

PTAC Direct Sales, Inc.
185 S. Kimball Ave. Suite 130
Southlake, TX 76092
877.454.7822 (T)

Hotpoint®

America's hardest working appliances.