

PTAC DIRECT SALES, INC.
185 S. Kimball Ave., Suite 130
Southlake, TX 76092
877.454.7822
www.PTACdirect.com

PRODUCT DATA BOOK



TABLE OF CONTENTS

Page No.	Part Number	Description
PTAC WALL SLEEVES		
3	SLEEVE-POLY-SE-INS	Wall Sleeve, Polymer SnapEase, Insulated, 42x16x14 - Alpine Beige
4	SLEEVE-POLY-SE-NON	Wall Sleeve, Polymer SnapEase, Non-Insulated, 42x16x14 - Alpine Beige
5	PTAC-SLEEVE-SE-INS	Wall Sleeve, Steel SnapEase, Insulated, 42x16x14 - Alpine Beige
6	PTAC-SLEEVE-A	Wall Sleeve, Steel Assembled, Insulated, 42x16x14 - Alpine Beige
7	PTAC-SLEEVE-SE-EXT16	Wall Sleeve 16-in Steel SnapEase, 42x16x16 -Alpine Beige
8	PTAC-SLEEVE-SE-EXT18	Wall Sleeve 18-in Steel SnapEase, 42x16x18 -Alpine Beige
9	PTAC-SLEEVE-SE-EXT24	Wall Sleeve 24-in Steel SnapEase, 42x16x24 -Alpine Beige
PTAC WALL SLEEVES ACCESSORIES		
10	FR-SLEEVE-EXT	Friedrich Wall Sleeve Adapter, 3-in, For 11-1/2 in, Deep Sleeve
11	SLEEVE-EXT-2IN	Wall Sleeve 2-in Steel SnapEase, 42 x 16 x 2 -Alpine Beige
12	SLEEVE-MOLDING	Wall Sleeve Molding Trim Kit, Steel, 42 x 16 -Alpine Beige
PTAC REAR GRILLES		
13	GRILLE-ALU-CLEAR	Grille, Aluminum Architectural, 42 x 16 -Clear
14	GRILLE-ALU-ALPIN	Grille, Aluminum Architectural, 42 x 16 -Alpine Beige
15	GRILLE-ALU-BEIGE	Grille, Aluminum Architectural, 42 x 16 -Beige
16	GRILLE-ALU-BRONZ	Grille, Aluminum Architectural, 42 x 16 -Light Bronze
17	GRILLE-ALU-MBRNZ	Grille, Aluminum Architectural, 42 x 16 -Medium Bronze
18	GRILLE-ALU-DBRNZ	Grille, Aluminum Architectural, 42 x 16 -Dark Bronze
19	GRILLE-ALU-SDOVE	Grille, Aluminum Architectural, 42 x 16 -Soft Dove
20	GRILLE-ALU-WHITE	Grille, Aluminum Architectural, 42 x 16 -Antique White
21	GRILLE-ALU-WHITE	Grille, Aluminum Architectural, 42 x 16 -Ultra White
22	GRILLE-PLA-ALPIN	Grille, Polymer Architectural, 42 x 16 -Alpine Beige
23	GRILLE-PLA-BEIGE	Grille, Polymer Architectural, 42 x 16 -Beige
24	GRILLE-PLA-DBRNZ	Grille, Polymer Architectural, 42 x 16 -Dark Bronze
25	GRILLE-PLA-SDOVE	Grille, Polymer Architectural, 42 x 16 -Soft Dove
26	GRILLE-PLA-WHITE	Grille, Polymer Architectural, 42 x 16 -White
27	GRILLE-ALU-STAMP	Grille, Stamped Aluminum, 42 x 16, -Clear
CONDENSATE DRAIN KIT		
28	DRAIN-KIT-1PK	Drain Kit, Includes Parts for Straight, 90-deg and Internal Drains
PTAC ELECTRICAL ASSECCORIES		
29	E2-CI-230V-15A	Conduit Interface Kit, ETAC2, 208/230v 15 amps
30	E2-CI-230V-20A	Conduit Interface Kit, ETAC2, 208/230v 20 amps
31	E2-CI-230V-30A	Conduit Interface Kit, ETAC2, 208/230v 30 amps
32	E2-CI-265V-15A	Conduit Interface Kit, ETAC2, 265v 15 amps
33	E2-CI-265V-20A	Conduit Interface Kit, ETAC2, 265v 20 amps
34	E2-CI-265V-30A	Conduit Interface Kit, ETAC2, 265v 30 amps
35	E2-HW-230V-15A	Hardwire Kit, ETAC2, 208/230v 15 amps
36	E2-HW-230V-20A	Hardwire Kit, ETAC2, 208/230v 20 amps
37	E2-HW-230V-30A	Hardwire Kit, ETAC2, 208/230v 30 amps
38	E2-HW-265V-15A	Hardwire Kit, ETAC2, 265v 15 amps
39	E2-HW-265V-20A	Hardwire Kit, ETAC2, 265v 20 amps
40	E2-HW-265V-30A	Hardwire Kit, ETAC2, 265v 30 amps
41	E2-SUB-HW-230V-15A	Hardwire Kit for Subbase, ETAC2, 208/230v 15 amps
42	E2-SUB-HW-230V-20A	Hardwire Kit for Subbase, ETAC2, 208/230v 20 amps
43	E2-SUB-HW-230V-30A	Hardwire Kit for Subbase, ETAC2, 208/230v 30 amps
44	E2-SUB-HW-265V-15A	Hardwire Kit for Subbase, ETAC2, 265v 15 amps
45	E2-SUB-HW-265V-20A	Hardwire Kit for Subbase, ETAC2, 265v 20 amps
46	E2-SUB-HW-265V-30A	Hardwire Kit for Subbase, ETAC2, 265v 30 amps
PTAC SUBBASES AND COMPONENTS		
47	SUBBASE-230V-15A	Subbase, Electrical 208/230V 15A
48	SUBBASE-230V-20A	Subbase, Electrical , 208/230V 20A
49	SUBBASE-230V-30A	Subbase, Electrical , 208/230V 30A
50	SUBBASE-265V-15A	Subbase, Electrical , 265V 15A
51	SUBBASE-265V-20A	Subbase, Electrical , 265V 20A
52	SUBBASE-265V-30A	Subbase, Electrical , 265V 30A
53	SUBBASE-HW-230V-15A	Subbase with Hardwire Whip, Electrical 208/230V 15A
54	SUBBASE-HW-230V-20A	Subbase with Hardwire Whip, Electrical 208/230V 20A
55	SUBBASE-HW-230V-30A	Subbase with Hardwire Whip, Electrical 208/230V 30A
56	SUBBASE-HW-265V-15A	Subbase with Hardwire Whip, Electrical 265V 15A
57	SUBBASE-HW-265V-20A	Subbase with Hardwire Whip, Electrical 265V 20A
58	SUBBASE-HW-265V-30A	Subbase with Hardwire Whip, Electrical 265V 30A
59	PTAC-SUBBASE-A	Subbase, Non-Electrical Subbase
60	SUBBASE-SWITCH-A	Subbase Switch Kit, DPST Disconnect Switch - 208/230/265V
61	SUBBASE-FUSE-15A	Subbase Fuse-Switch Kit, 15 amp 208/230/265v
62	SUBBASE-FUSE-20A	Subbase Fuse-Switch Kit, 20 amp 208/230/265v
63	SUBBASE-FUSE-30A	Subbase Fuse-Switch Kit, 30 amp 208/230/265v
64	SUBBASE-PANEL-A	Subbase Panel for PN: PTAC-SUBBASE-A
65	LEVELING-LEGS	Leveling Legs, adjustable to support and level unit, 2 per pack
PTAC ACCESSORIES		
66	PTAC-DEFLECTOR-A	Air Deflector, Prevents discharge air blowing into curtains
LATERAL DUCT		
67	LATERAL-DUCT	Lateral Duct, Includes Plenum and 4-ft Extension Duct - Alpine Beige
TTW ACCESSORIES		
68	SLEEVE-TTW-25	TTW Wall Sleeve, 25-inch Steel SnapEase -Alpine Beige
69	GRILLE-TTW-25-CLEAR	TTW Grille, 25-inch Aluminum Architectural -Clear
70	SLEEVE-TTW-26	TTW Wall Sleeve, 26-inch Steel SnapEase -Alpine Beige
71	GRILLE-TTW-26-STAMP	TTW Grille, 26-inch Stamped Aluminum -Clear
72	GRILLE-TTW-26-CLEAR	TTW Grille, 26-inch Aluminum Architectural -Clear
DUCTFREE ACCESSORIES		
73	DFS-SWITCH-A	Ductfree Switch Module, 3-pole Indoor Disconnect Switch

Submittal Data: SLEEVE-POLY-SE-INS

PTAC Standard Polymer Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Standard 42 x 16 x 13.9-in wall sleeve.
- Noncorrosive fiberglass-reinforced polyester compound.
- Stainless steel latches.
- Lined with acoustical & thermal insulation.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.

**Specifications**

Material: Sheet Molding Compound (SMC) w/Fiberglass Reinforcement
 Fire Rating: UL-5V
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Alpine Beige
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute






Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	13.9-in
Weight	24.0-lbs

Shipping Dimensions

Length	45.5-in
Height	3.25-in
Depth	15.5-in
Weight	24.5-lbs
Pallet Qty	42 pcs

Units: Inch(mm)

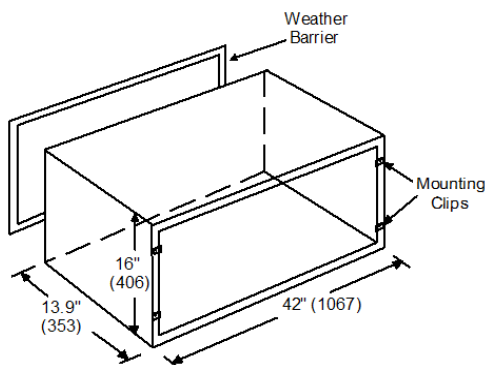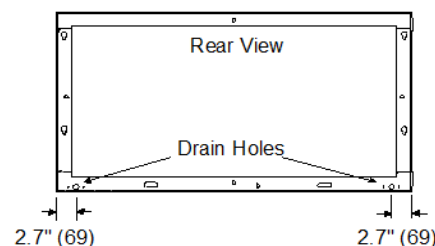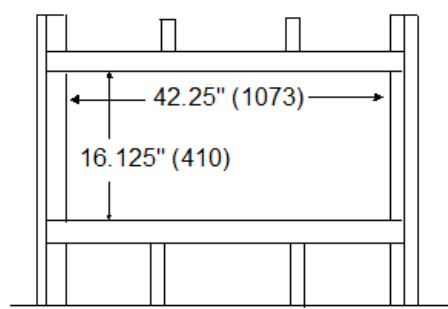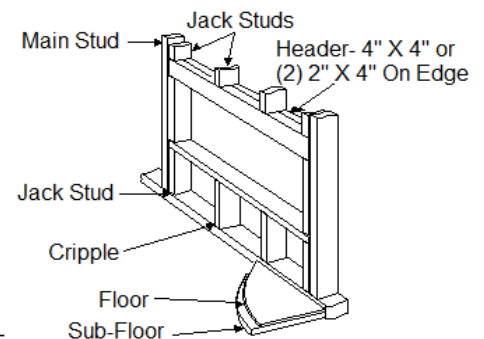**Drain Hole Locations****Typical PTAC Installation****Minimum Wall Sleeve Opening****Framing Wall Sleeve Opening**

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SLEEVE-POLY-SE-NON

PTAC Standard Polymer Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Standard 42 x 16 x 13.9-in wall sleeve.
- Noncorrosive fiberglass-reinforced polyester compound.
- Stainless steel latches.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.

**Specifications**

Material: Sheet Molding Compound (SMC) w/Fiberglass Reinforcement
 Fire Rating: UL-5V
 Insulation: None
 Insulation Thickness: 0.0
 Color: Alpine Beige
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute


Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	13.9-in
Weight	22.0-lbs


Shipping Dimensions

Length	45.5-in
Height	3.25-in
Depth	15.5-in
Weight	22.5-lbs
Pallet Qty	42 pcs


Units: Inch(mm)

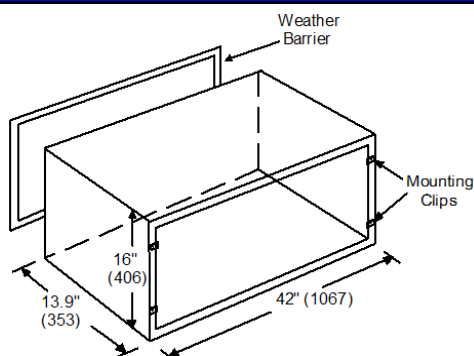


Drain Hole Locations

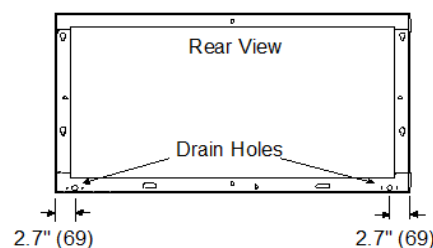


Typical PTAC Installation



Minimum Wall Sleeve Opening

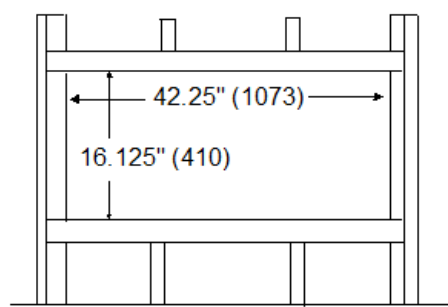

Framing Wall Sleeve Opening

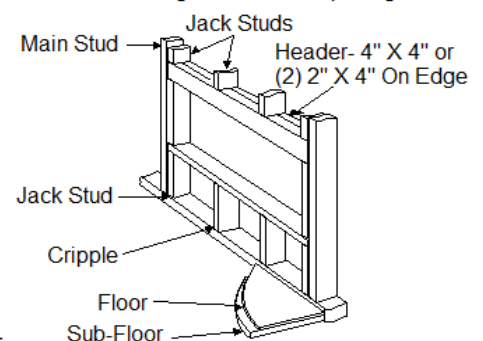

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: PTAC-SLEEVE-SE-INS**PTAC Standard Metal Wall Sleeve**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Standard 42 x 16 x 13.75-in wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvanized steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.

**Specifications**

Material: Hot Dip Galvanized Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Alpine Beige
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute

* including paint.


Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	13.75-in
Weight	28.0-lbs


Shipping Dimensions

Length	45.5-in
Height	3.0-in
Depth	15.0-in
Weight	28.5-lbs
Pallet Qty	42 pcs


Units: Inch(mm)

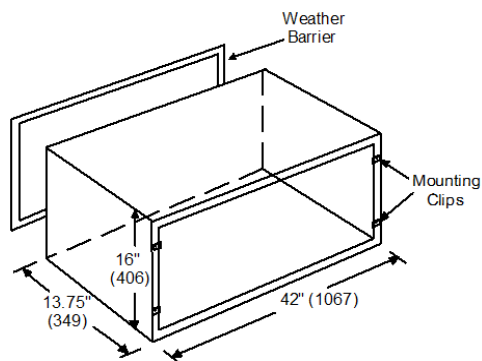


Typical PTAC Installation




Drain Hole Locations

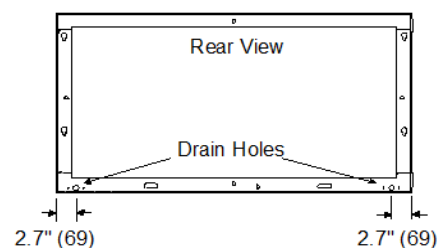

Minimum Wall Sleeve Opening

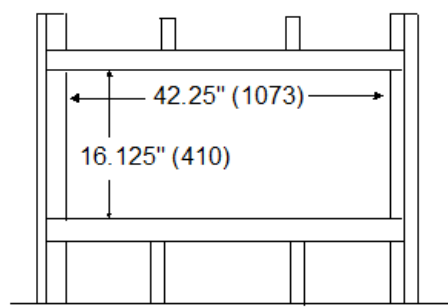

Framing Wall Sleeve Opening

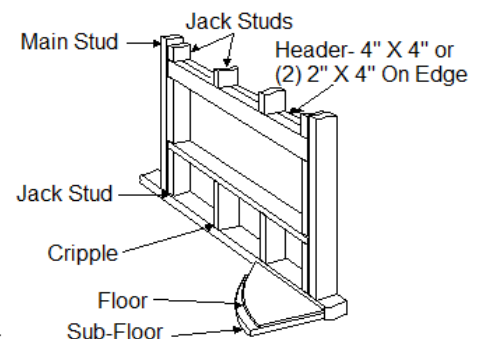

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: PTAC-SLEEVE-A**PTAC Standard Metal Wall Sleeve**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Standard 42 x 16 x 13.75-in wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvanized steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.

**Specifications**

Material: Hot Dip Galvanized Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Alpine Beige
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute

* * including paint.






Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	13.75-in
Weight	28.0-lbs

Shipping Dimensions

Length	43.5-in
Height	16.75-in
Depth	14.5-in
Weight	28.5-lbs
Pallet Qty	9 pcs

Units: Inch(mm)

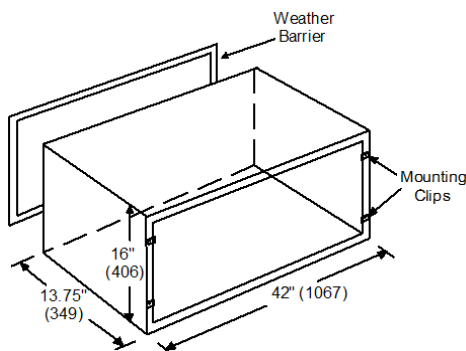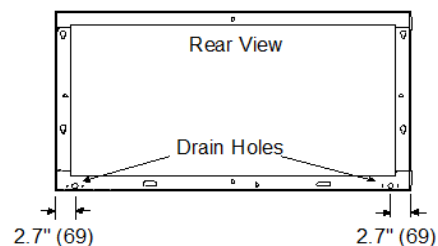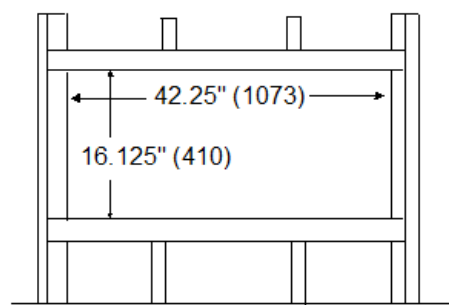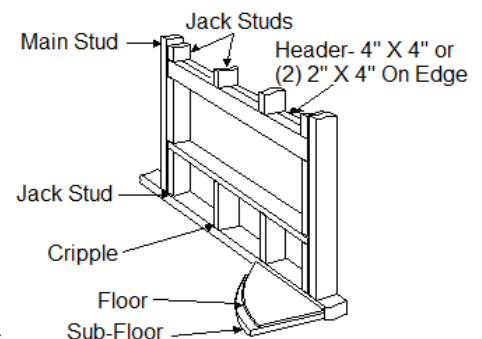**Drain Hole Locations****Typical PTAC Installation****Minimum Wall Sleeve Opening****Framing Wall Sleeve Opening**

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: PTAC-SLEEVE-SE-EXT16
PTAC Extended Metal Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Extended 42 x 16 x 16-in wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvanized steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.


Specifications

Material: Hot Dip Galvanized Steel
Material Thickness*: 0.0433 to 0.0480-in
Insulation: Dual-density Fiber Glass
Insulation Thickness: 0.25-in
Color: Alpine Beige
Finish: Lightly Textured
Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute



* including paint.

Unit Dimensions




Length	42.0-in
Height	16.0-in
Depth	16.0-in
Weight	38.5-lbs

Shipping Dimensions

Length	45.5-in
Height	3.25-in
Depth	17.0-in
Weight	39.0-lbs
Pallet Qty	28 pcs

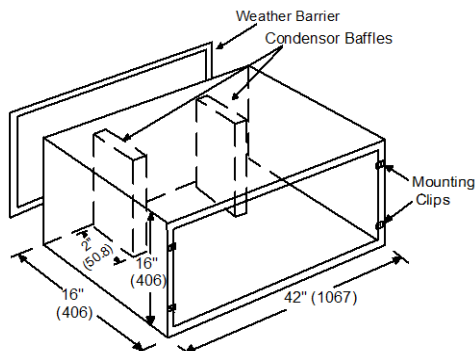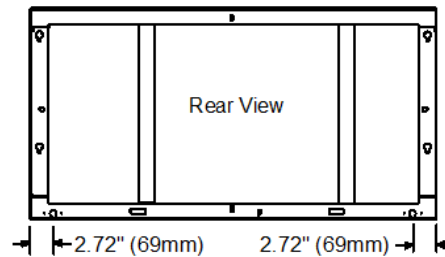
Drain Hole Locations


Units: Inch(mm)

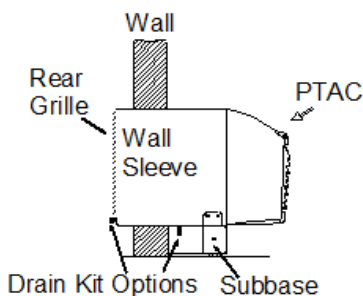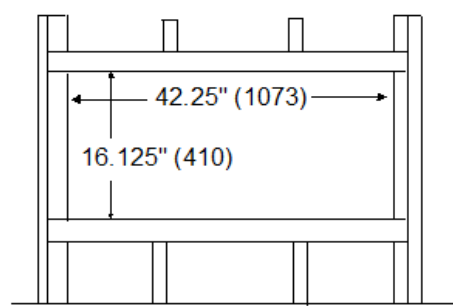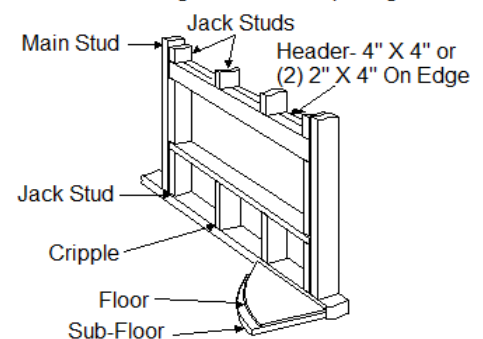Typical PTAC Installation

Minimum Wall Sleeve Opening

Framing Wall Sleeve Opening


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: PTAC-SLEEVE-SE-EXT18**PTAC Extended Metal Wall Sleeve**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Extended 42 x 16 x 18-in wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvanized steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.

**Specifications**

Material: Hot Dip Galvanized Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Alpine Beige
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute



* including paint.

Unit Dimensions




Length	42.0-in
Height	16.0-in
Depth	18.0-in
Weight	44.0-lbs

Shipping Dimensions

Length	46.5-in
Height	3.25-in
Depth	19.0-in
Weight	44.5-lbs
Pallet Qty	28 pcs

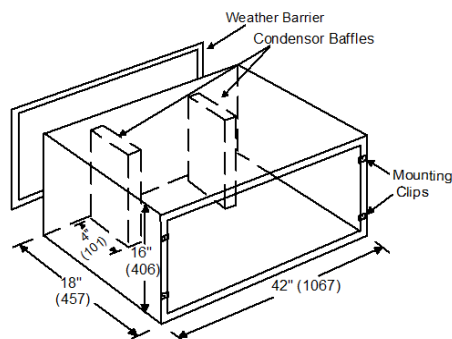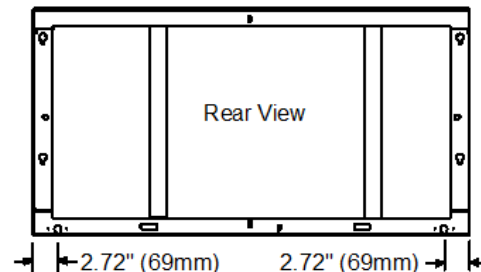**Drain Hole Locations**

Units: Inch(mm)

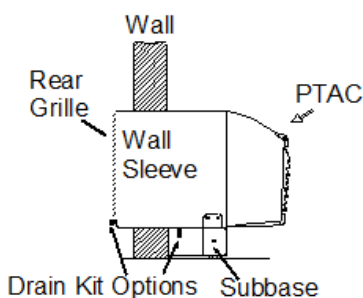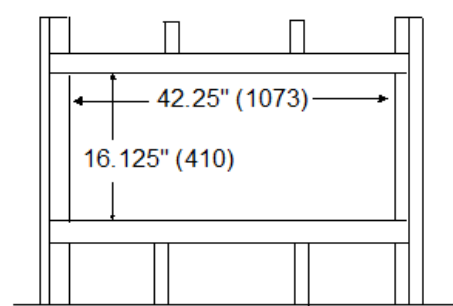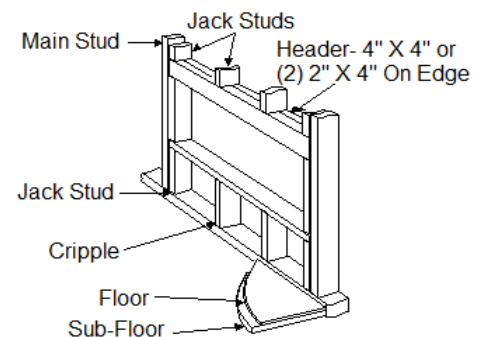Typical PTAC Installation**Minimum Wall Sleeve Opening****Framing Wall Sleeve Opening**

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: PTAC-SLEEVE-SE-EXT24**PTAC Extended Metal Wall Sleeve**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Extended 42 x 16 x 24-in wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvanized steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.

**Specifications**

Material: Hot Dip Galvanized Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Alpine Beige
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute

* * including paint.


Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	24.0-in
Weight	59.0-lbs


Shipping Dimensions

Length	45.25-in
Height	4.0-in
Depth	25.75-in
Weight	59.5-lbs
Pallet Qty	24 pcs


Units: Inch(mm)

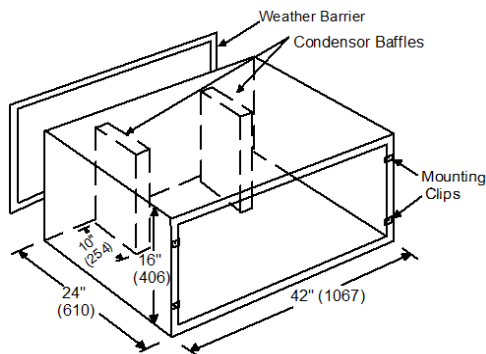


Typical PTAC Installation

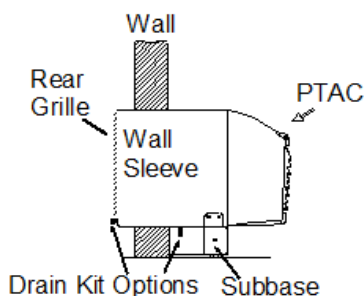


Drain Hole Locations

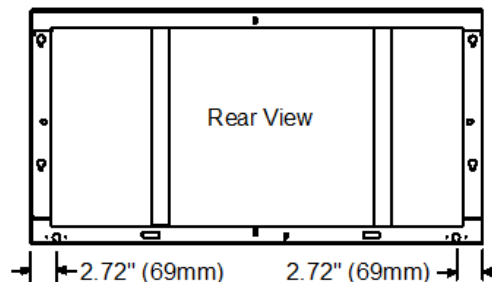

Minimum Wall Sleeve Opening

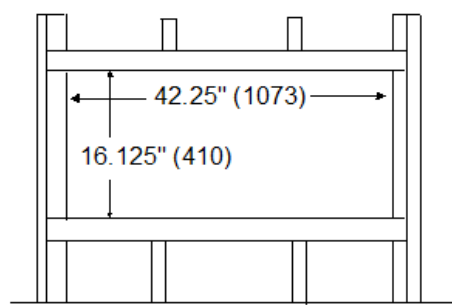

Framing Wall Sleeve Opening

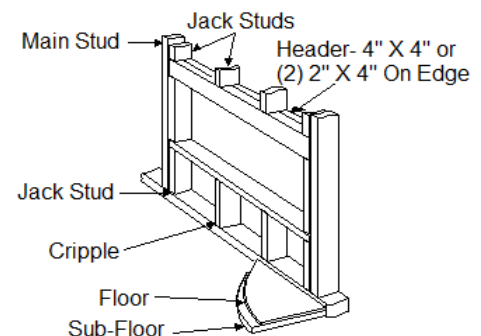


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SLEEVE-EXT-2IN**Wall Sleeve Extender**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- 42 x 16 x 2-in wall sleeve extender.
- Fits on front side of standard wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvanized steel.
- Powder coated paint for superior adhesion & protection.
- Includes (2) condenser air baffle/gasket extenders.
- Includes (4) mounting screws for wall sleeve attachment.

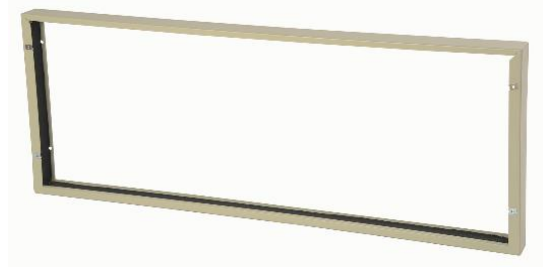**Specifications**

Material: Hot Dip Galvanized Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Alpine Beige
 Finish: Lightly Textured
 Condenser Baffles/Gaskets: 12.5 x 2 x 2-in (closed cell foam)\

* including paint.



Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	2.0-in
Weight	6-lbs


Shipping Dimensions

Length	43.75-in
Height	2.5-in
Depth	16.5-in
Weight	6.5-lbs
Pallet Qty	32 pcs


Units: Inch(mm)

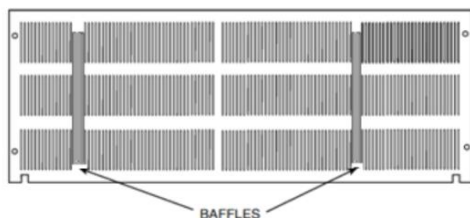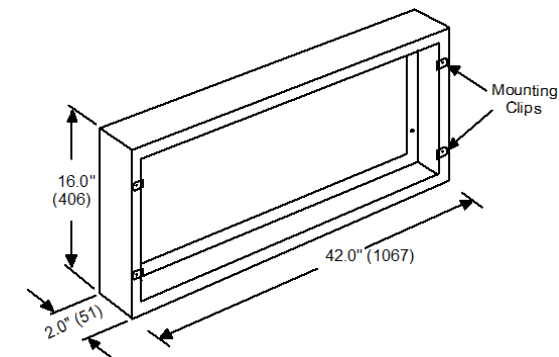

Add condenser baffle/gasket extenders to outdoor grille. (Grille type shown- ref only)

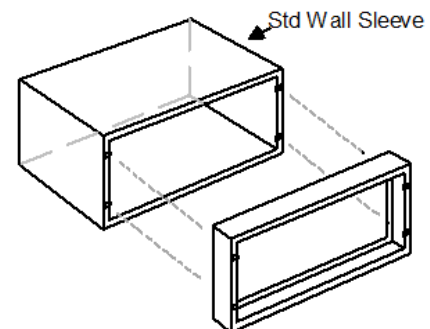

Fastens to indoor side with 4 screws.



Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: FR-SLEEVE-EXT**Friedrich Wall Sleeve Adapter**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- 42 x 16 x 3-in Wall Sleeve Adapter.
- Fits on inside of Friedrich T-series wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvanized steel.
- Powder coated paint for superior adhesion & protection.
- Includes (4) mounting screws for wall sleeve attachment.

**Specifications**

Material: Hot Dip Galvanized Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Cool Gray
 Finish: Lightly Textured

* including paint.




Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	3.0-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.75-in
Height	3.5-in
Depth	16.5-in
Weight	8-lbs
Pallet Qty	22 pcs

Units: Inch(mm)

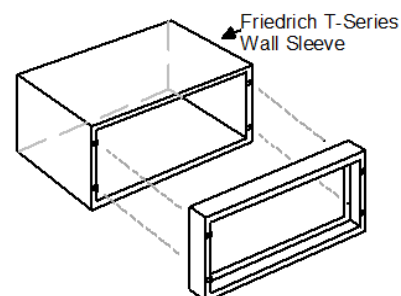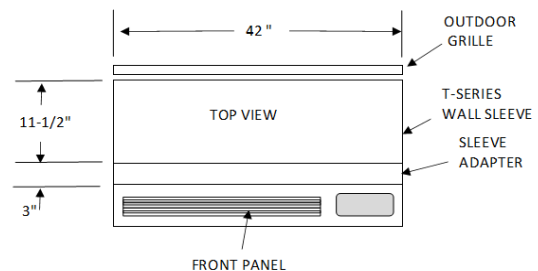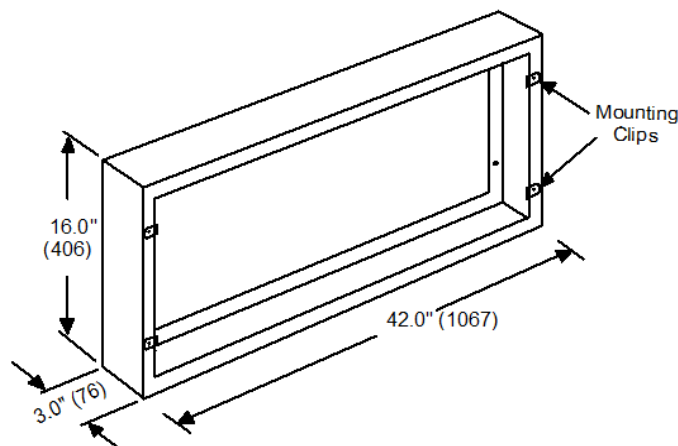

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SLEEVE-MOLDING**Wall Sleeve Trim Molding**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Fits standard 42 x 16 -in wall sleeves.
- Trims sleeve to wall and hides construction imperfections.
- One piece/No assembly.
- Made of heavy duty steel.
- Powder coated paint for superior adhesion & protection.

**Specifications**

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Color: Alpine Beige
 Finish: Lightly Textured

Unit Dimensions (inside)


Length	42.125-in
Height	16.125-in
Depth	0.5-in
Weight	3.0-lbs

Shipping Dimensions

Length	45-in
Height	1.0-in
Depth	18.5-in
Weight	3.5-lbs
Pallet Qty	80 pcs

* including paint.

Units: Inch(mm)

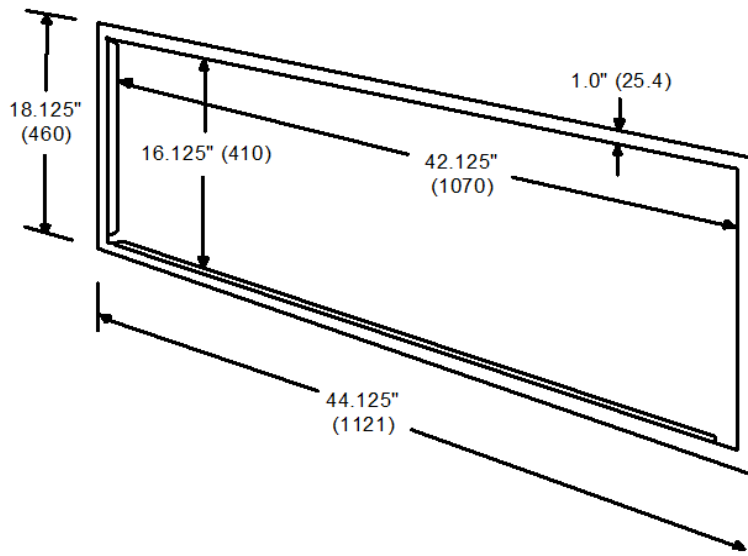

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-ALU-CLEAR

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Clear anodized aluminum color.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Clear Anodized
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

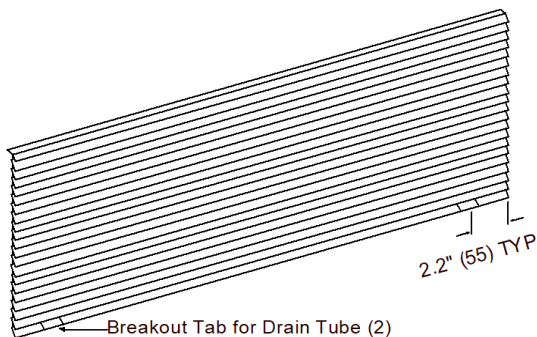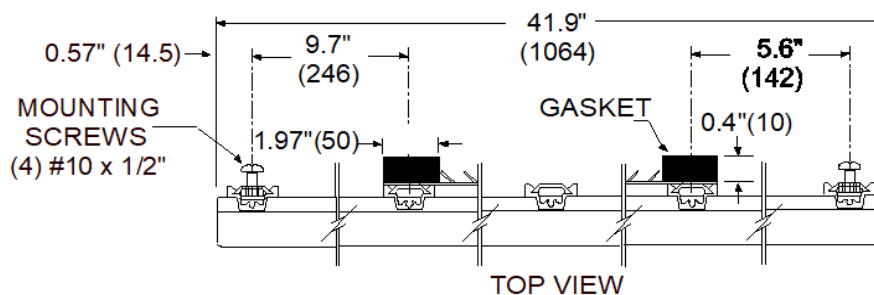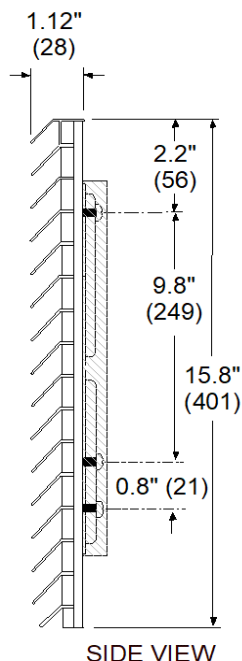

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: GRILLE-ALU-ALPIN

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

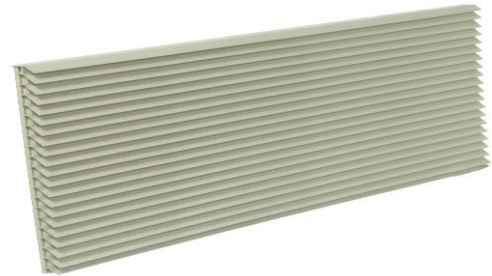**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Alpine Beige
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

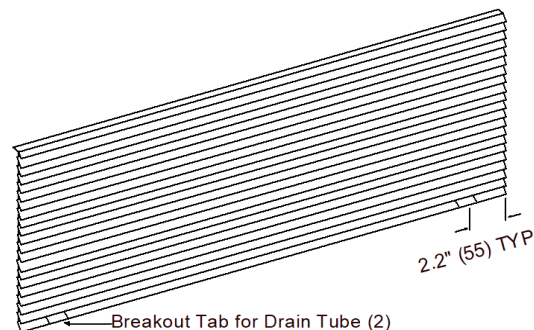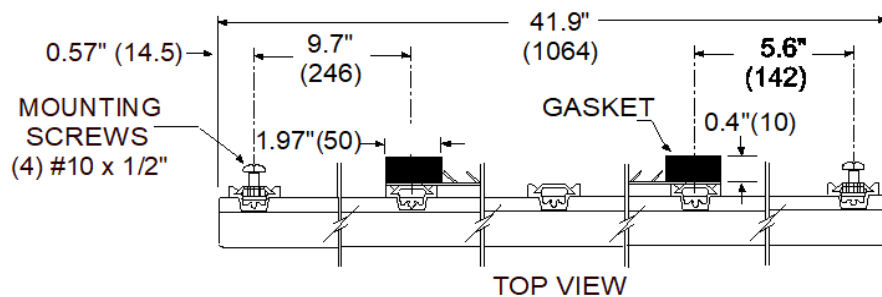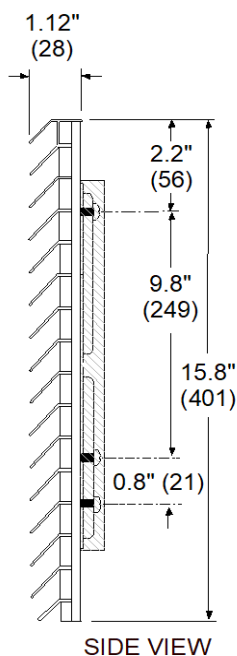

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-ALU-BEIGE

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

**Specifications**




Material: Extruded aluminum, Alloy 6063-T5
 Finish: Beige
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Condenser Fin Pitch: 50°
 Louver Pitch: 50°

Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

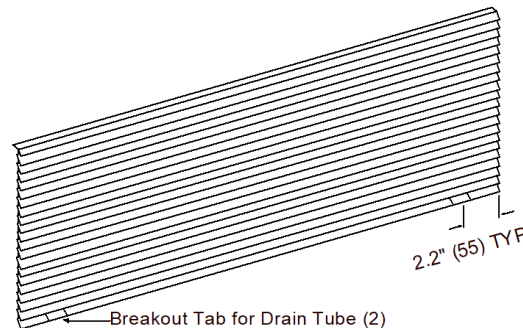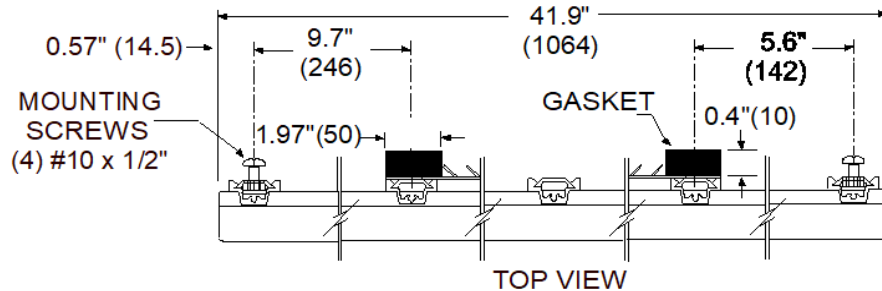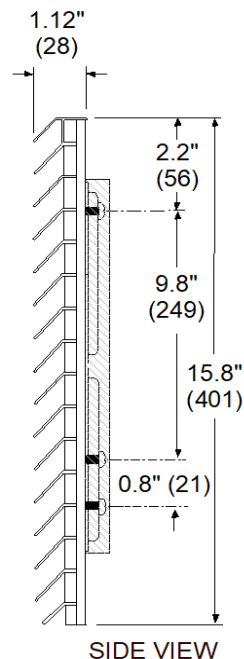

Units: Inch(mm)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-ALU-BRONZ

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Bronze
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.6-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

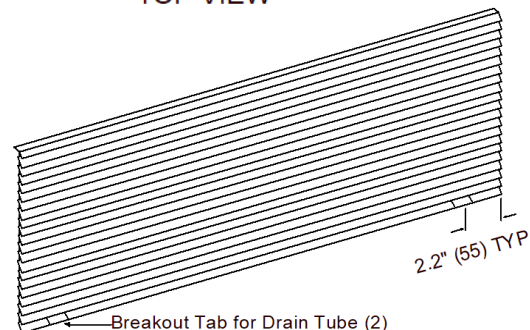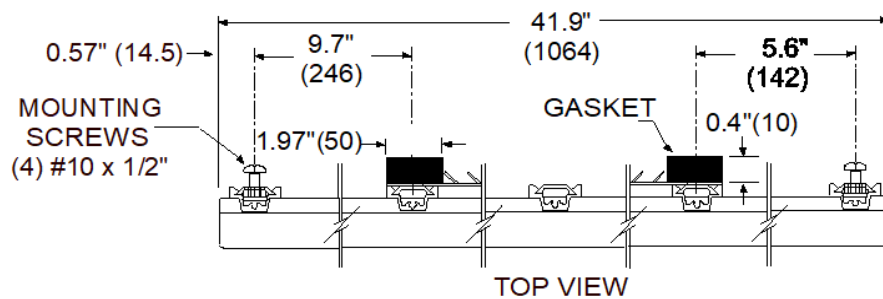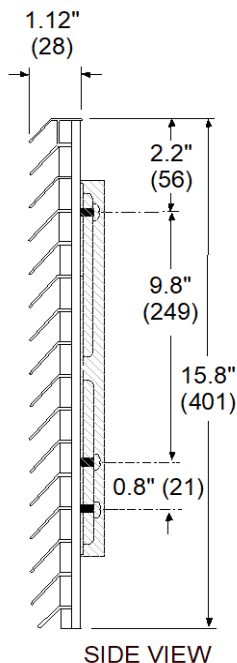

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: GRILLE-ALU-MBRONZ

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

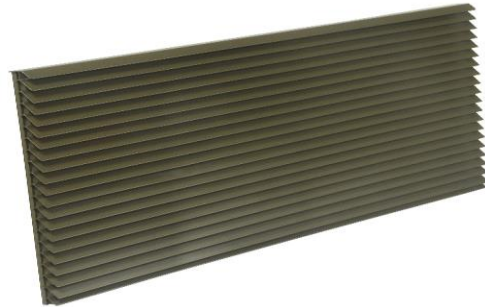**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Medium Bronze
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.6-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

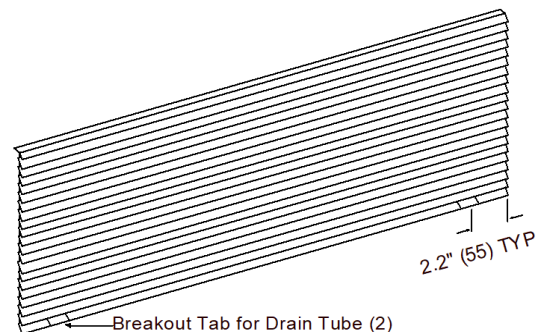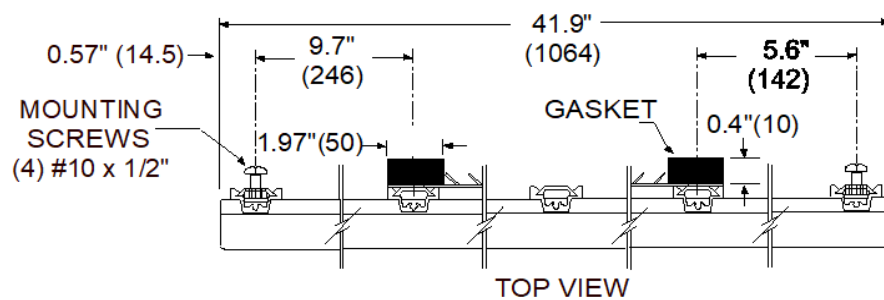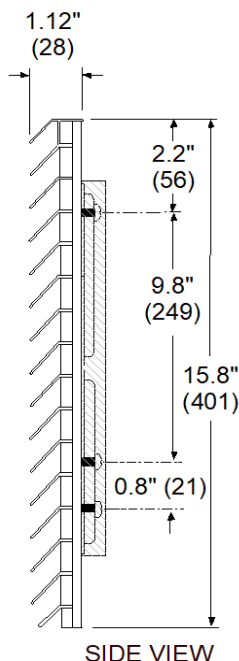

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-ALU-DBRONZ

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Dark Bronze/Brown
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

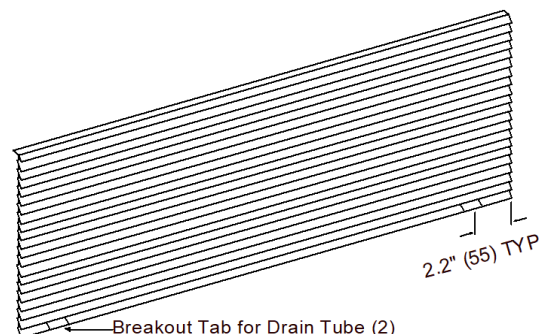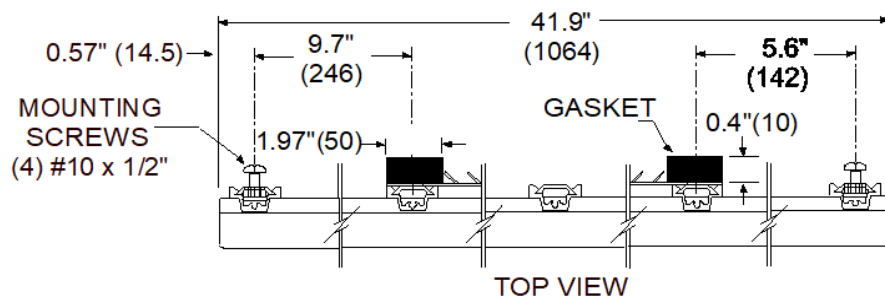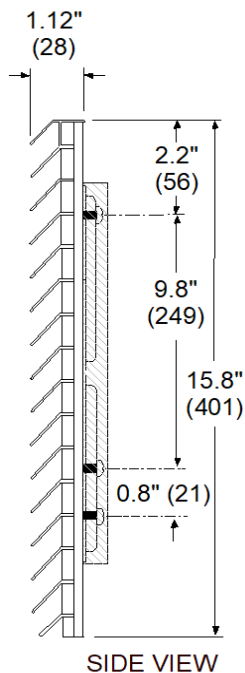

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: GRILLE-ALU-SDOVE

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

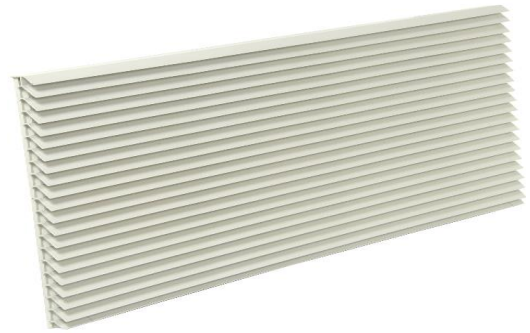**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Soft Dove Beige
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %


Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

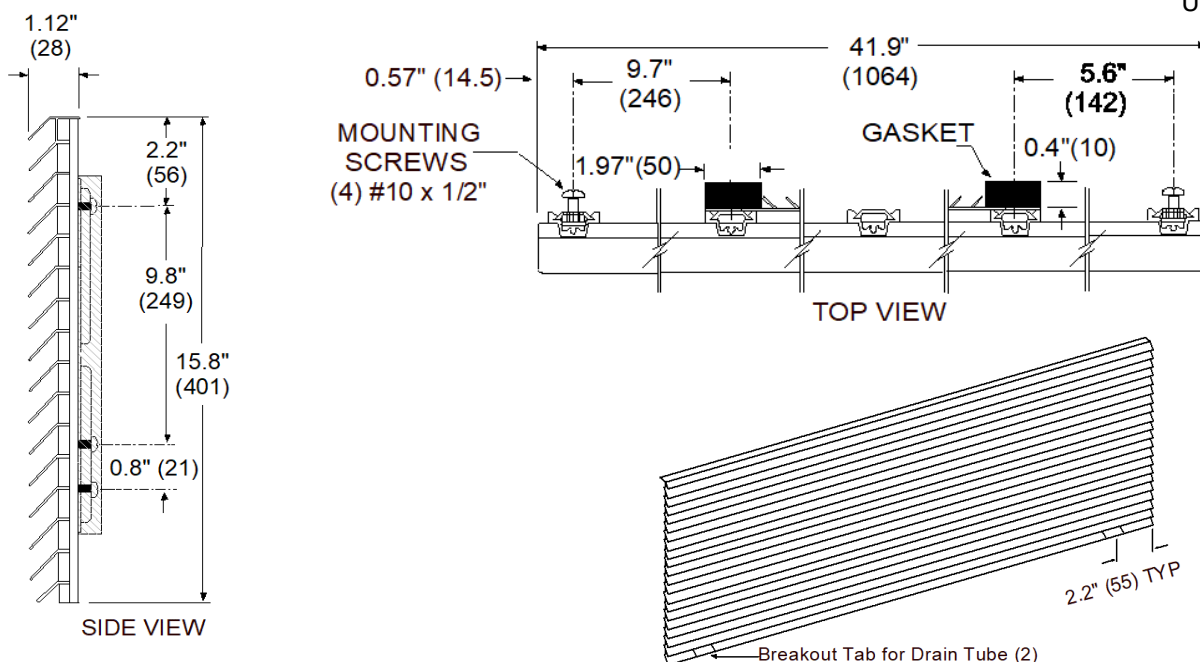

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: GRILLE-ALU-WHITE

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

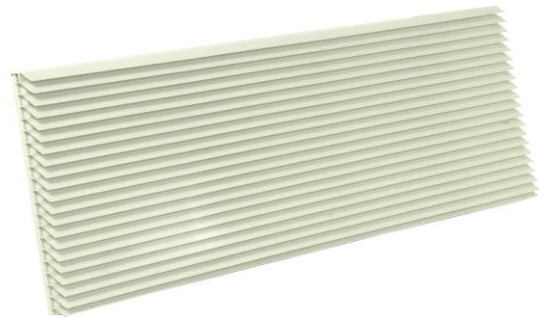**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Antique White
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

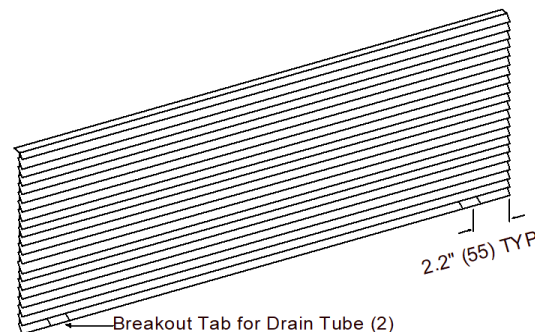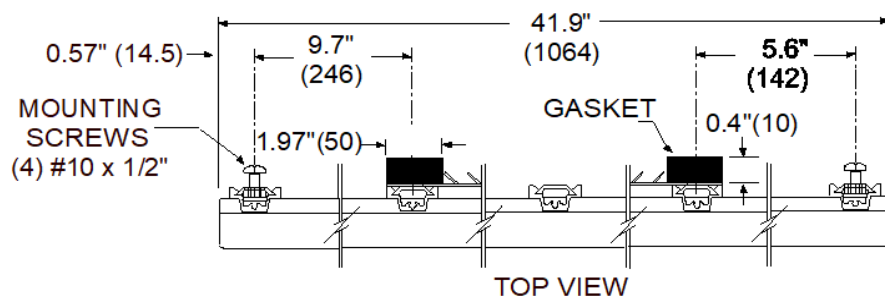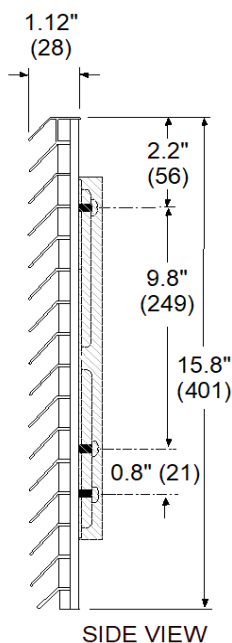


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-ALU-UWHITE**Architectural Aluminum Grille**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

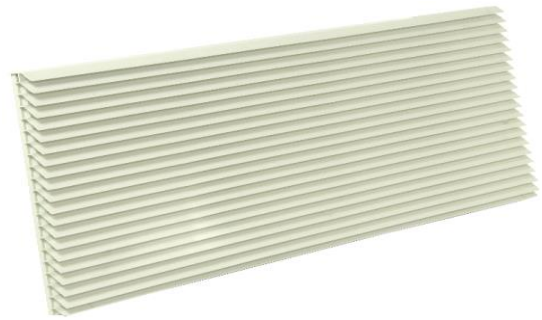**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Ultra Bright White
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

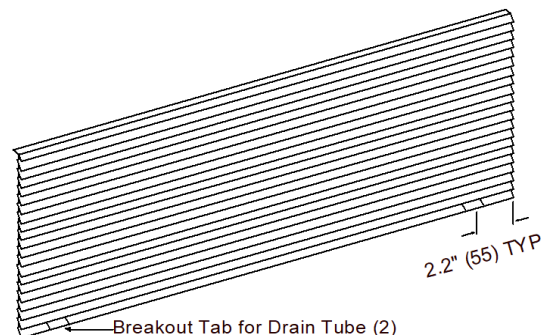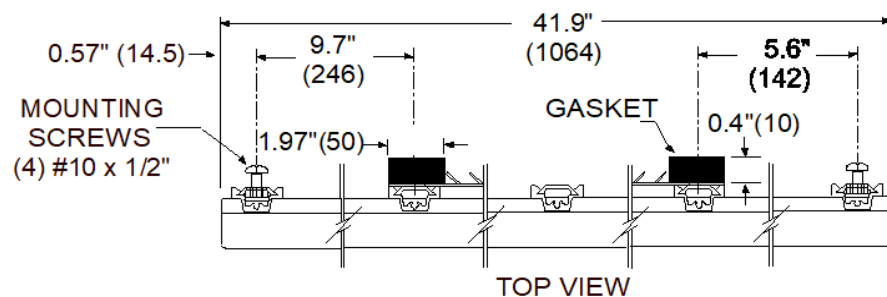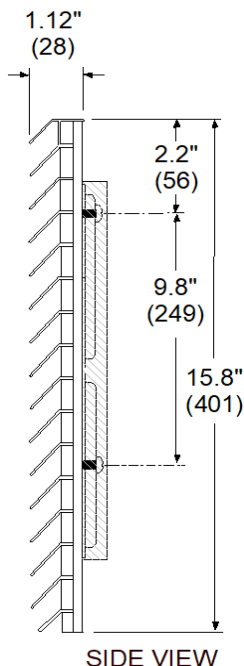

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-PLA-ALPIN

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.

**Specifications**

Material: Injection Molding Polycarbonate

Finish: Alpine Beige

Louver Thickness: 0.125-in

Wall & Rib Thickness: 0.070-in

Louver Pitch: 49°

Condenser Free Area: 65.3 %




Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.16-in
Weight	7.0-lbs

Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

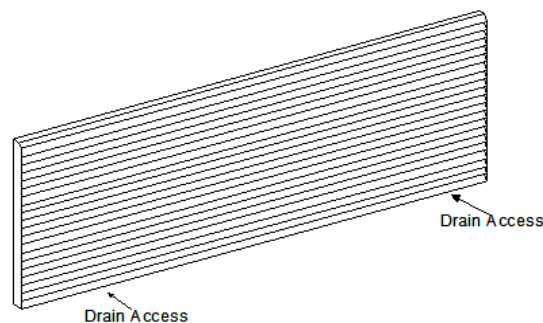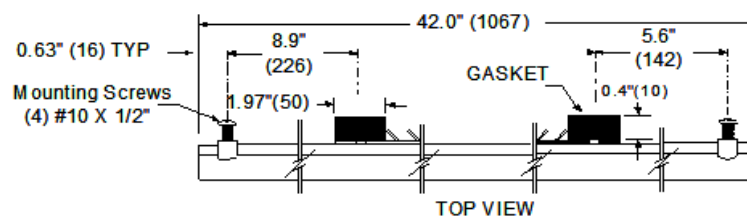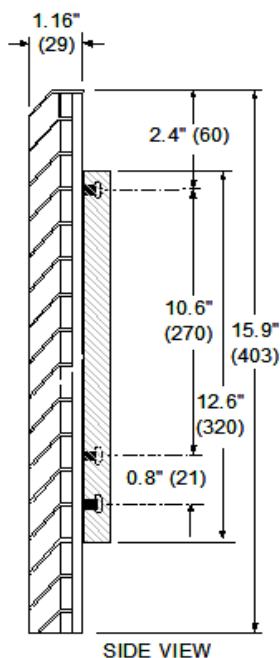

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-PLA-BEIGE

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.

**Specifications**

Material: Injection Molding Polycarbonate

Finish: Beige

Louver Thickness: 0.125-in

Wall & Rib Thickness: 0.070-in

Louver Pitch: 49°

Condenser Free Area: 65.3 %


Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.16-in
Weight	7.0-lbs


Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs


Units: Inch(mm)

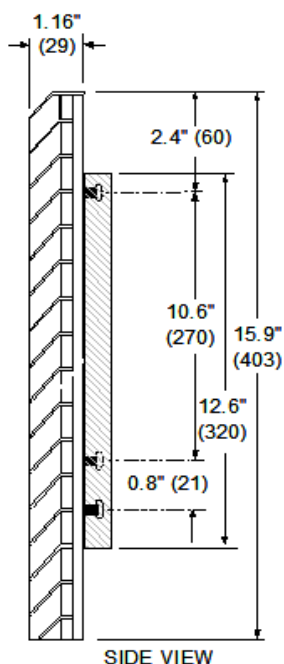

SIDE VIEW

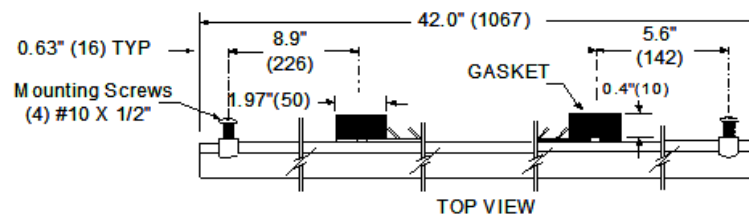

TOP VIEW

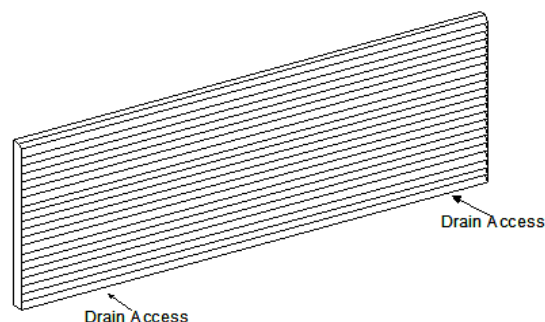

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-PLA-DBRONZ

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.

**Specifications**

Material: Injection Molding Polycarbonate

Finish: Dark Bronze

Louver Thickness: 0.125-in

Wall & Rib Thickness: 0.070-in

Louver Pitch: 49°

Condenser Free Area: 65.3 %




Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.16-in
Weight	7.0-lbs

Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

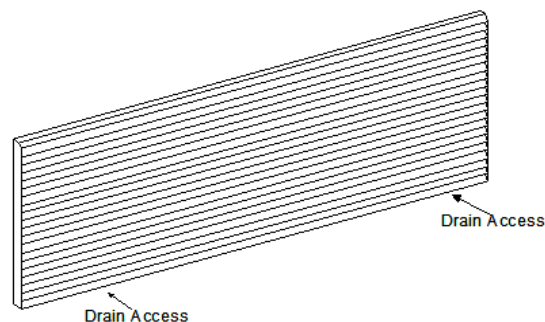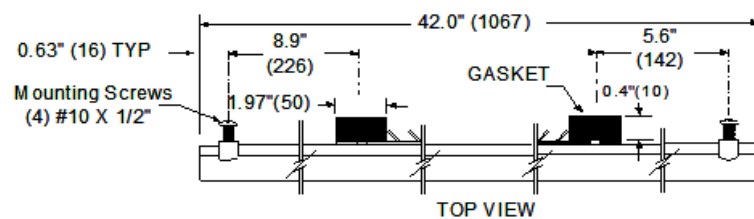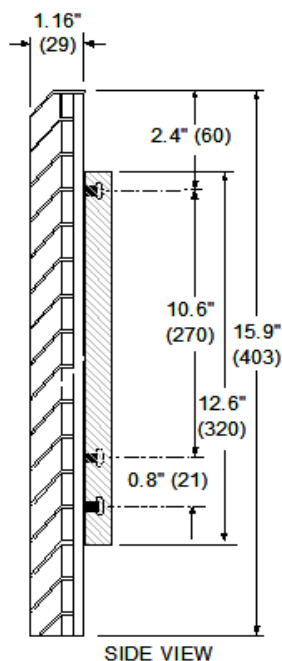

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: GRILLE-PLA-SDOVE

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.

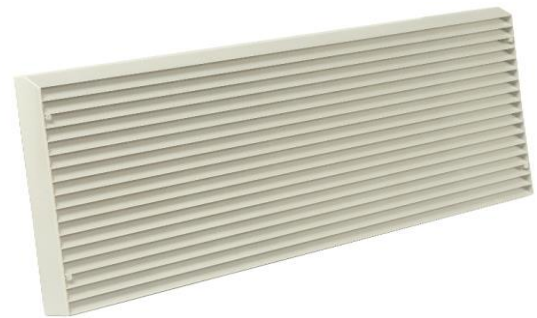**Specifications**

Material: Injection Molding Polycarbonate

Finish: Soft Dove Beige

Louver Thickness: 0.125-in

Wall & Rib Thickness: 0.070-in

Louver Pitch: 49°

Condenser Free Area: 65.3 %


Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.16-in
Weight	7.0-lbs


Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs


Units: Inch(mm)

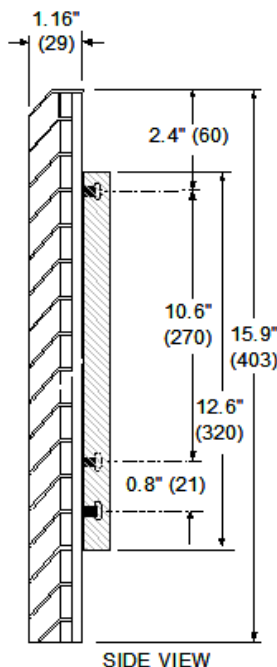

SIDE VIEW

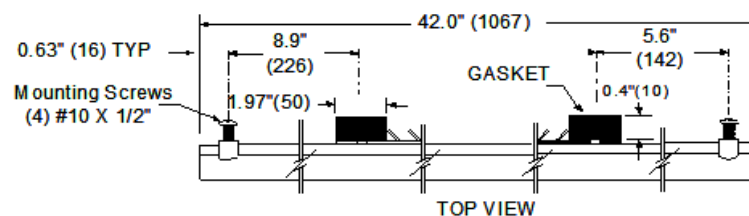

TOP VIEW

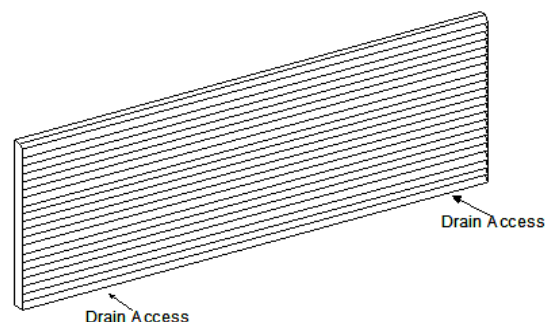

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: GRILLE-PLA-WHITE

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.

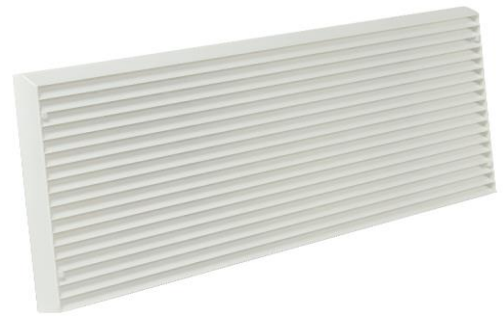**Specifications**

Material: Injection Molding Polycarbonate

Finish: White

Louver Thickness: 0.125-in

Wall & Rib Thickness: 0.070-in

Louver Pitch: 49°

Condenser Free Area: 65.3 %


Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.6-in
Weight	7.0-lbs


Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs


Units: Inch(mm)

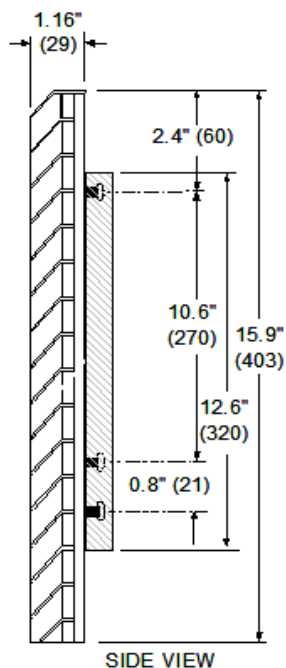

SIDE VIEW

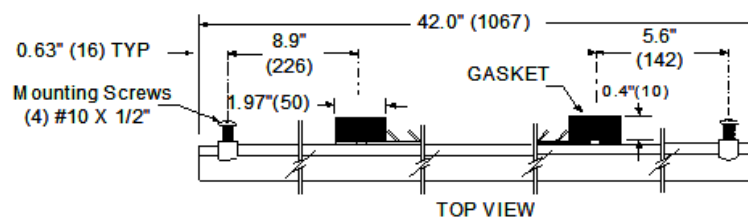

TOP VIEW

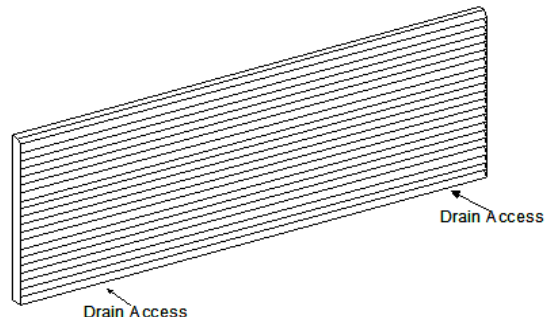

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-ALU-STAMP**Stamped Aluminum Grille**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Strong and durable aluminum construction.
- Clear anodized aluminum color.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain holes provided.
- Factory installed foam condenser air baffle/gaskets.

**Specifications**

Material: Aluminum
 Finish: Clear
 Fin Thickness: 1.02 mm
 Condenser Fin Pitch: 73°
 Condenser Free Area: 96 %


Unit Dimensions

Length	41.6-in
Height	15.6-in
Depth	0.5-in
Weight	3-lbs

Shipping Dimensions

Length	42-in
Height	16-in
Depth	1-in
Weight	3.5-lbs
Pallet Qty	86 pcs

Units: Inch(mm)

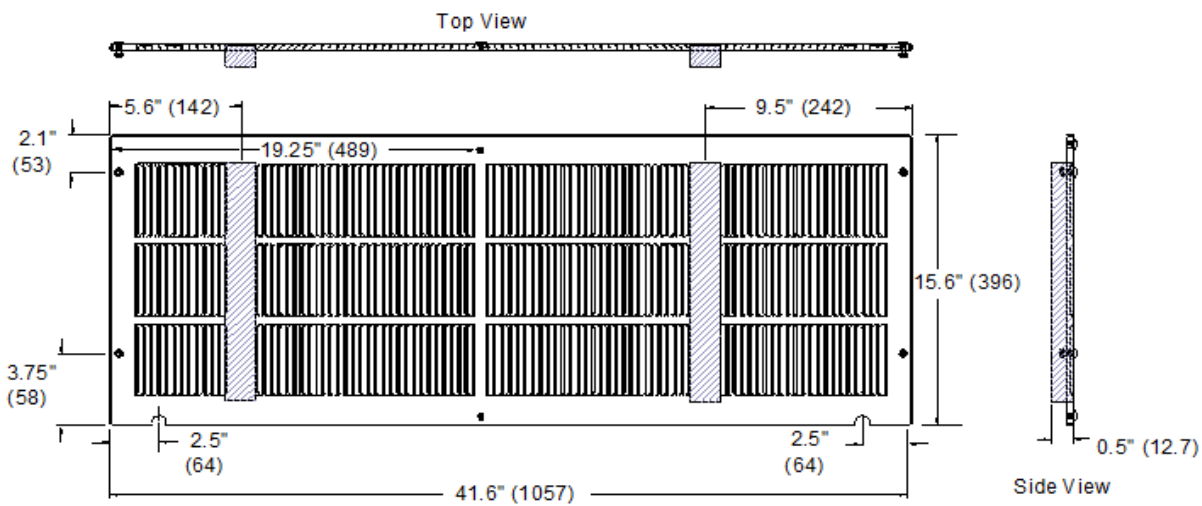

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: DRAIN-KIT-1PK

PTAC Condensate Drain



Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Easily mounts to rear flange for an exterior drain system.
- Includes a 3-inch straight and short 90-degree drain copper tube.
- Mounts easily and securely to standard wall sleeve.
- Configurable for internal wall drain system.
- Corrosive resistant stainless steel screws.


**Shipping Dimensions**

Length	6.0-in
Height	0.5-in
Depth	6.0-in
Weight	0.25-lbs
Pallet Qty	2920 pcs

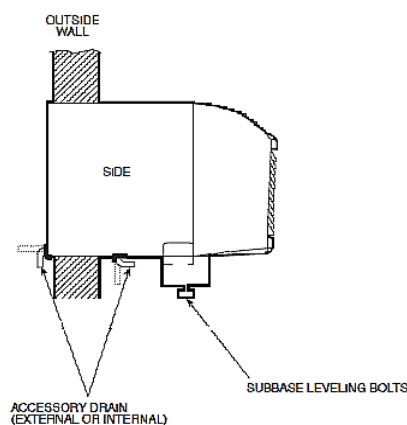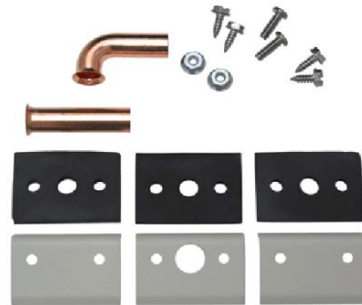


Units: Inch(mm)

Drain Hole Locations

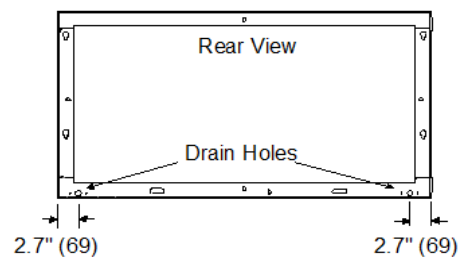

Drain Tube Dimensions

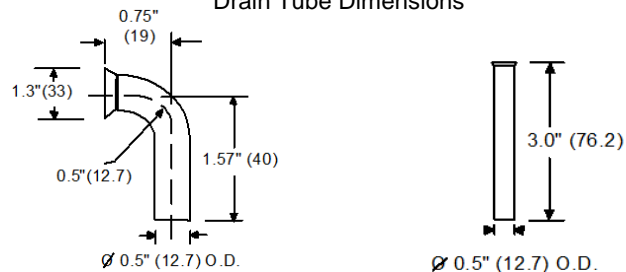

Kit Includes :

- (1) 90 deg Copper Drain Tube
- (1) 3" Straight Copper Drain Tube
- (2) Solid Drain Brackets incl. Foam to Seal Drain Holes
- (1) Drain Bracket with Hole for Drain Tube incl Foam Seal
- Stainless Steel Screws

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-CI-230V-15A**PTAC Conduit Interface Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 15 amp conduit interface kit.
- Connect existing conduit & wires to ETAC2 unit.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Wire: 12 AWG 600V 105^oC
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green

Electrical:
 Voltage Rating: 208/230v
 Current Rating: 15 amp
 Unit Power Connection: Gree ETAC2


Unit Dimensions

Length	8.0-in
Height	3.0-in
Depth	1.0-in
Weight	0.5-lbs

Shipping Dimensions

Length	6.0-in
Height	6.0-in
Depth	1.0-in
Weight	0.5-lbs

Item	Description
1	Conduit Interface 230V-15A Wire Assembly
2	Unit Attachment Cover
3	90 Degree Conduit Connector

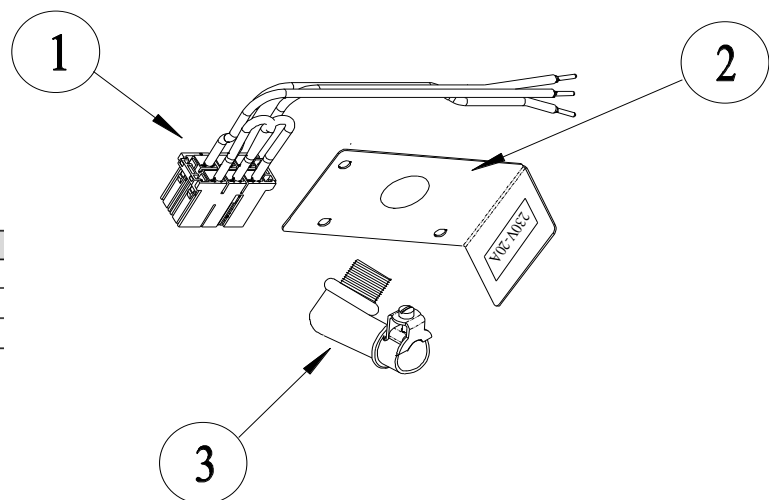

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-CI-230V-20A**PTAC Conduit Interface Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 20 amp conduit interface kit.
- Connect existing conduit & wires to ETAC2 unit.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green

Electrical:
 Voltage Rating: 208/230v
 Current Rating: 20 amp
 Unit Power Connection: Gree ETAC2


Unit Dimensions

Length	8.0-in
Height	3.0-in
Depth	1.0-in
Weight	0.5-lbs

Shipping Dimensions

Length	6.0-in
Height	6.0-in
Depth	1.0-in
Weight	0.5-lbs

Item	Description
1	Conduit Interface 230V-20A Wire Assembly
2	Unit Attachment Cover
3	90 Degree Conduit Connector

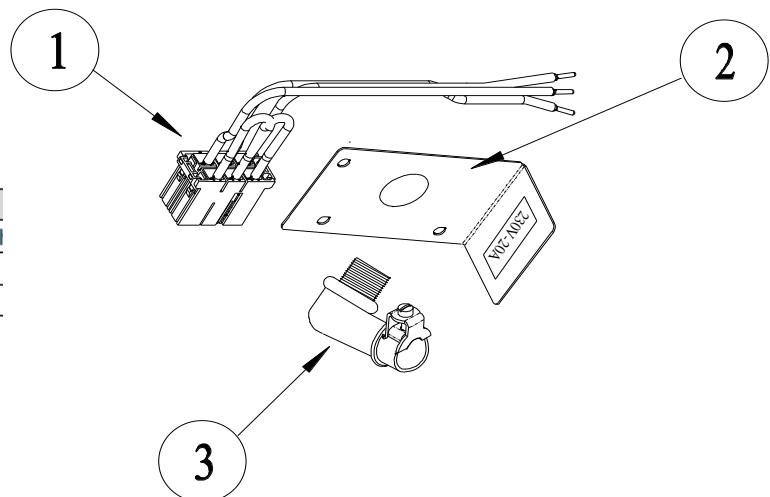

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-CI-230V-30A**PTAC Conduit Interface Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 30 amp conduit interface kit.
- Connect existing conduit & wires to ETAC2 unit.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green

Electrical:
 Voltage Rating: 208/230v
 Current Rating: 30 amp
 Unit Power Connection: Gree ETAC2


Unit Dimensions

Length	8.0-in
Height	3.0-in
Depth	1.0-in
Weight	0.5-lbs

Shipping Dimensions

Length	6.0-in
Height	6.0-in
Depth	1.0-in
Weight	0.5-lbs

Item	Description
1	Conduit Interface 230V-30A Wire Assembly
2	Unit Attachment Cover
3	90 Degree Conduit Connector

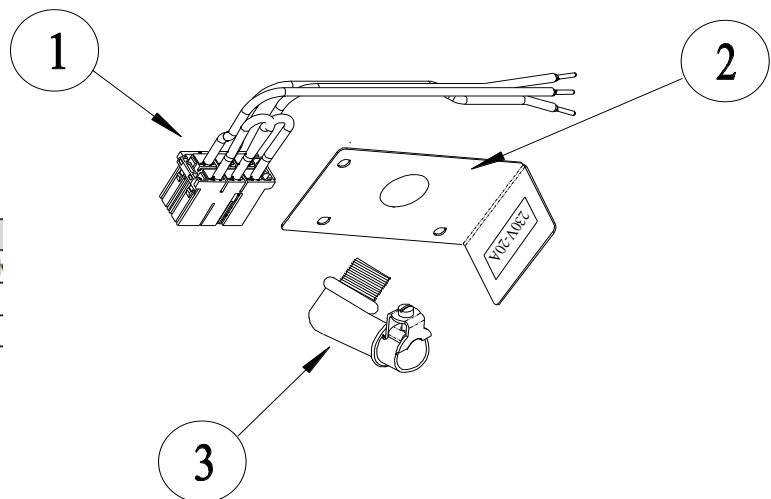


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-CI-265V-15A**PTAC Conduit Interface Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 15 amp conduit interface kit.
- Connect existing conduit & wires to ETAC2 unit.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:
 Voltage Rating: 265v
 Current Rating: 15 amp
 Unit Power Connection: Gree ETAC2


Unit Dimensions

Length	8.0-in
Height	3.0-in
Depth	1.0-in
Weight	0.5-lbs

Shipping Dimensions

Length	6.0-in
Height	6.0-in
Depth	1.0-in
Weight	0.5-lbs

Item	Description
1	Conduit Interface 265V-15A Wire Assembly
2	Unit Attachment Cover
3	90 Degree Conduit Connector

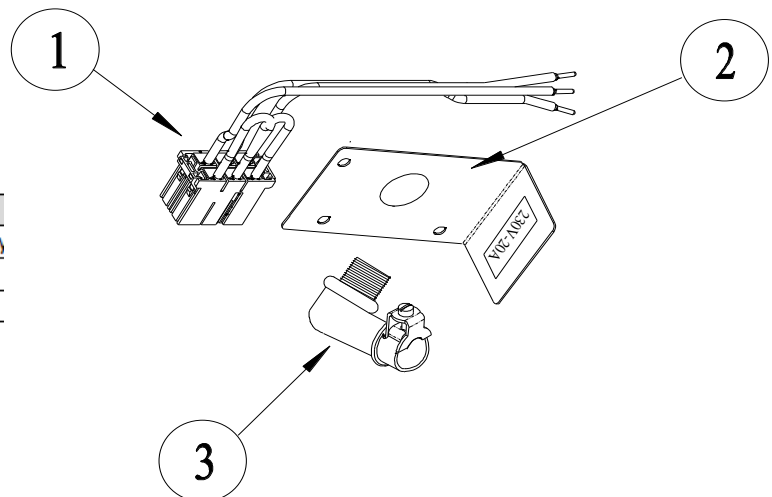

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-CI-265V-20A**PTAC Conduit Interface Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 20 amp conduit interface kit.
- Connect existing conduit & wires to ETAC2 unit.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:
 Voltage Rating: 265v
 Current Rating: 20 amp
 Unit Power Connection: Gree ETAC2


Unit Dimensions

Length	8.0-in
Height	3.0-in
Depth	1.0-in
Weight	0.5-lbs

Shipping Dimensions

Length	6.0-in
Height	6.0-in
Depth	1.0-in
Weight	0.5-lbs

Item	Description
1	Conduit Interface 265V-20A Wire Assembly
2	Unit Attachment Cover
3	90 Degree Conduit Connector

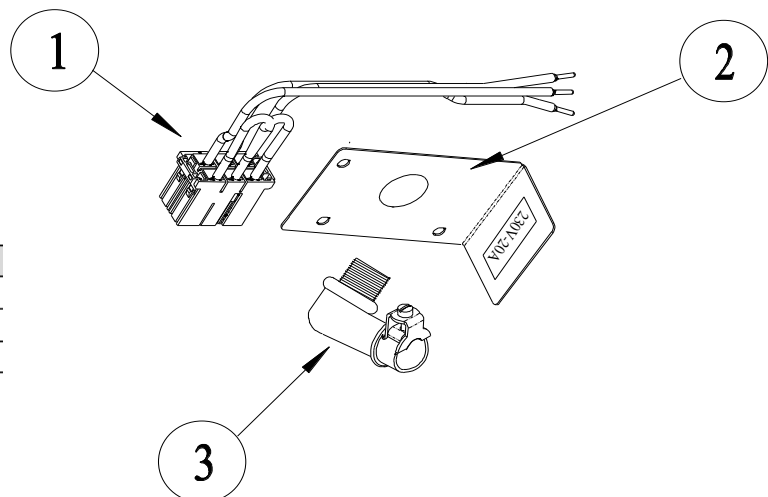

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-CI-265V-30A**PTAC Conduit Interface Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 30 amp conduit interface kit.
- Connect existing conduit & wires to ETAC2 unit.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:
 Voltage Rating: 265V
 Current Rating: 30 amp
 Unit Power Connection: Gree ETAC2


Unit Dimensions

Length	8.0-in
Height	3.0-in
Depth	1.0-in
Weight	0.5-lbs

Shipping Dimensions

Length	6.0-in
Height	6.0-in
Depth	1.0-in
Weight	0.5-lbs

Item	Description
1	Conduit Interface 265V-30A Wire Assembly
2	Unit Attachment Cover
3	90 Degree Conduit Connector

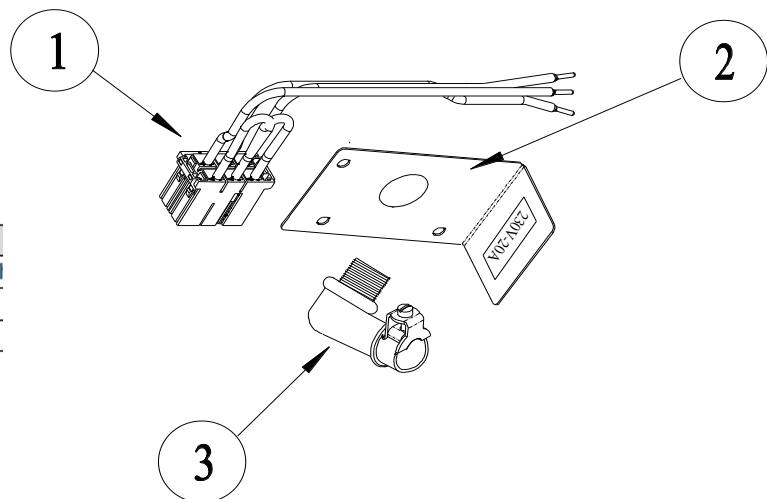

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-HW-230V-15A

PTAC Hardwire Kit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 15 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green


Electrical:
 Voltage Rating: 208/230v
 Current Rating: 15 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	36.0-in
Height	3/8-in
Depth	3/8-in
Weight	0.5-lbs

Shipping Dimensions

Length	15.0-in
Height	2.5-in
Depth	15.0-in
Weight	0.5-lbs

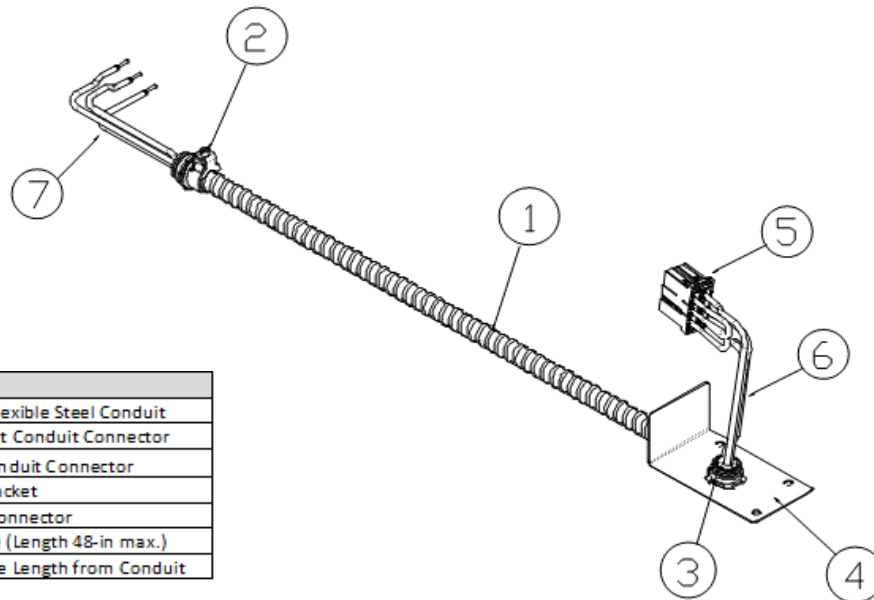

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-HW-230V-20A

PTAC Hardwire Kit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 20 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green


Electrical:
 Voltage Rating: 208/230v
 Current Rating: 20 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	36.0-in
Height	3/8-in
Depth	3/8-in
Weight	0.5-lbs

Shipping Dimensions

Length	15.0-in
Height	2.5-in
Depth	15.0-in
Weight	0.5-lbs

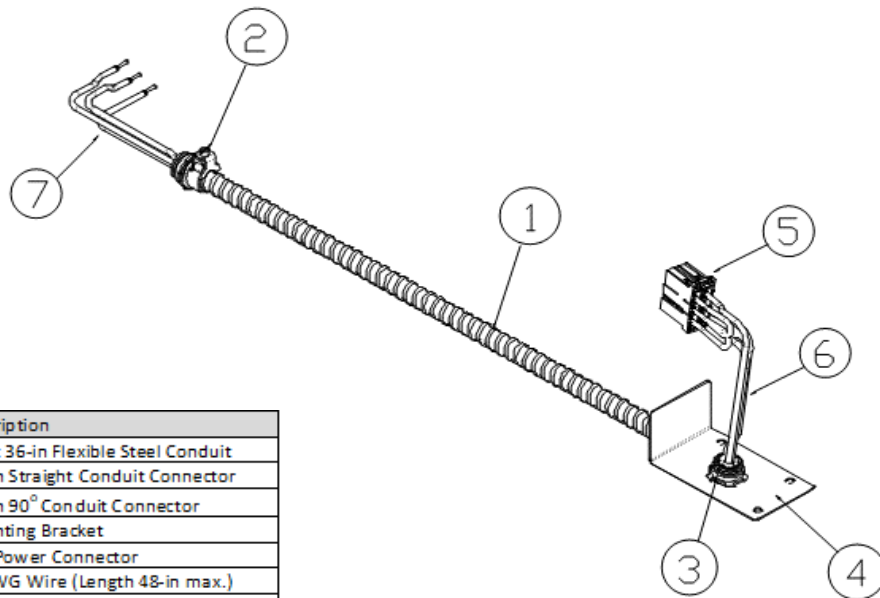

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-HW-230V-30A

PTAC Hardwire Kit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 30 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.

**Specifications**

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green


Electrical:
 Voltage Rating: 208/230v
 Current Rating: 30 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	36.0-in
Height	3/8-in
Depth	3/8-in
Weight	0.5-lbs

Shipping Dimensions

Length	15.0-in
Height	2.5-in
Depth	15.0-in
Weight	0.5-lbs

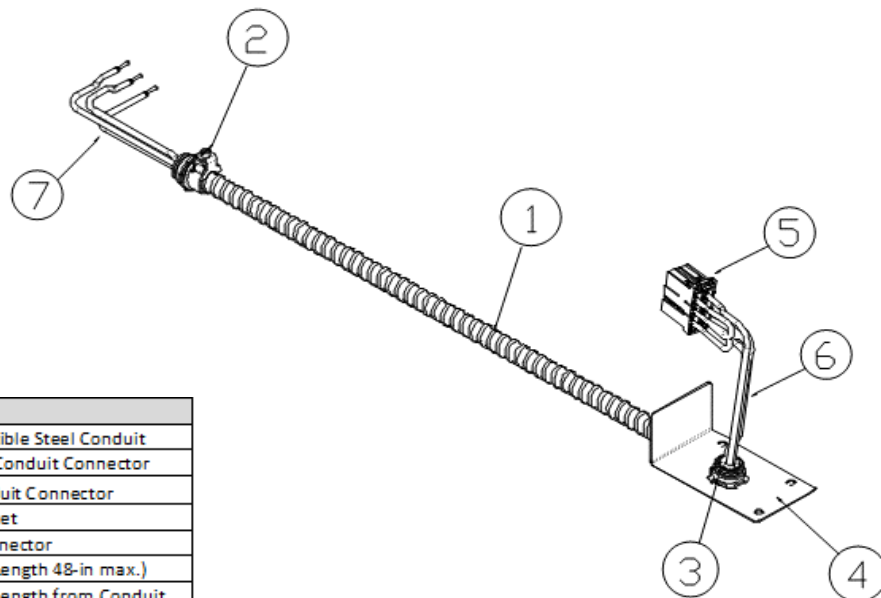

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-HW-265V-15A

PTAC Hardwire Kit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 15 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- Made for Gree ETAC2 models ONLY.

**Specifications**

Physical:

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:


Voltage Rating: 265v
 Current Rating: 15 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	36.0-in
Height	3/8-in
Depth	3/8-in
Weight	0.5-lbs

Shipping Dimensions

Length	15.0-in
Height	2.5-in
Depth	15.0-in
Weight	0.5-lbs

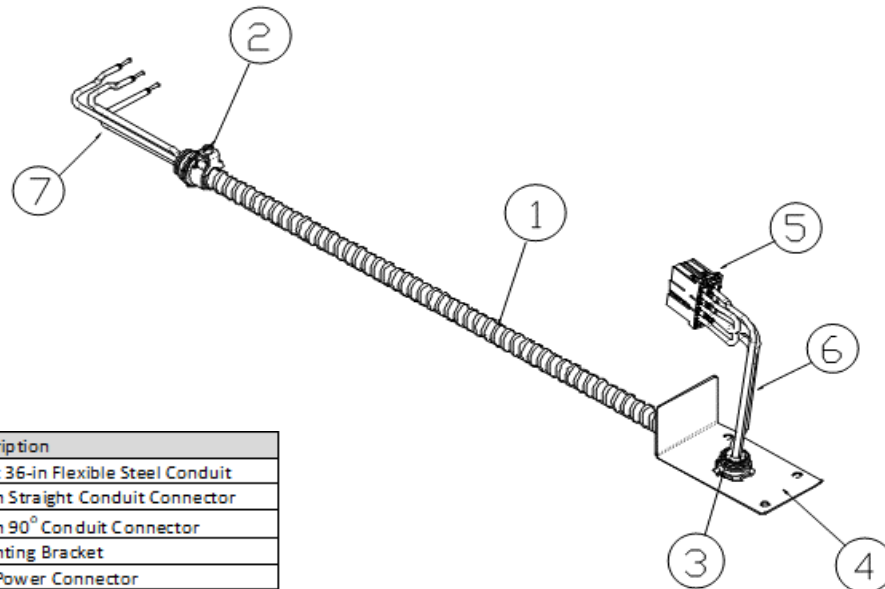

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-HW-265V-20A

PTAC Hardwire Kit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 20 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- Made for Gree ETAC2 models ONLY.

**Specifications**

Physical:

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:


Voltage Rating: 265v
 Current Rating: 20 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	36.0-in
Height	3/8-in
Depth	3/8-in
Weight	0.5-lbs

Shipping Dimensions

Length	15.0-in
Height	2.5-in
Depth	15.0-in
Weight	0.5-lbs

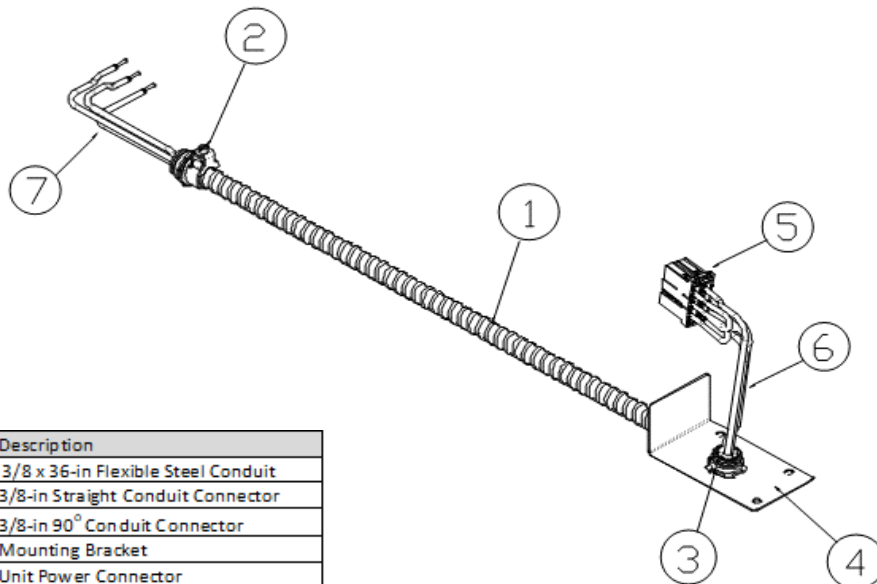

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-HW-265V-30A

PTAC Hardwire Kit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 30 amp conduit hardwire.
- Flexible steel conduit construction.
- Easy unit disconnect for maintenance or service
- Made for Gree ETAC2 models ONLY.

**Specifications**

Physical:

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:


Voltage Rating: 265v
 Current Rating: 30 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	36.0-in
Height	3/8-in
Depth	3/8-in
Weight	0.5-lbs

Shipping Dimensions

Length	15.0-in
Height	2.5-in
Depth	15.0-in
Weight	0.5-lbs

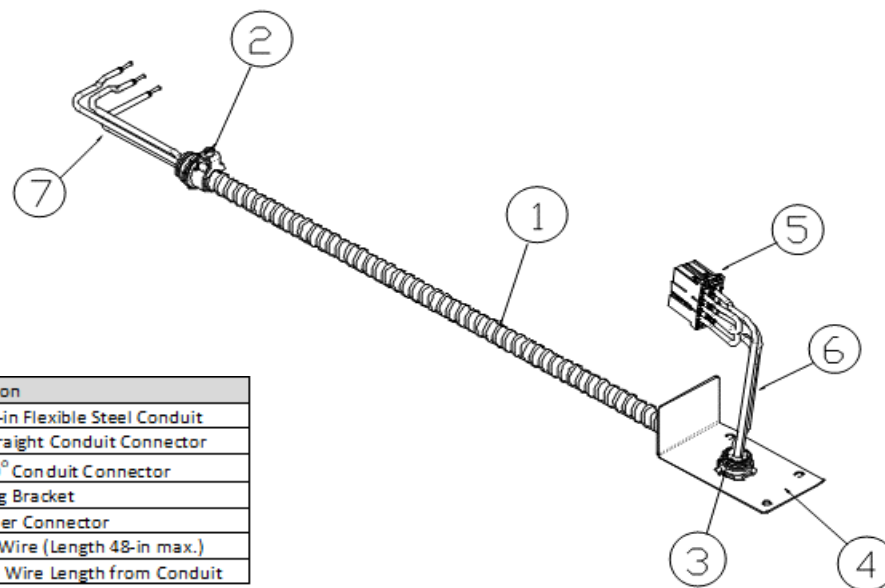

Item	Description
1	3/8 x 36-in Flexible Steel Conduit
2	3/8-in Straight Conduit Connector
3	3/8-in 90° Conduit Connector
4	Mounting Bracket
5	Unit Power Connector
6	12 AWG Wire (Length 48-in max.)
7	6-in min. Wire Length from Conduit

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-SUB-HW-230V-15A

PTAC Hardwire Kit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 15 amp conduit hardwire.
- Includes flexible steel conduit and steel electrical junction box.
- Provides direct connection between unit and subbase.
- Easy unit disconnect for maintenance.
- For Gree ETAC2 models ONLY.
- Must be used with non-electrical subbase (Part#: PTAC-SUBBASE-A)

**Specifications**

Physical:

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green

Electrical:


Voltage Rating: 208/230v
 Current Rating: 15 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	21.0-in
Height	3/8-in
Depth	3/8-in
Weight	1.0-lbs

Shipping Dimensions

Length	15.0-in
Height	3.0-in
Depth	15.0-in
Weight	1.0-lbs

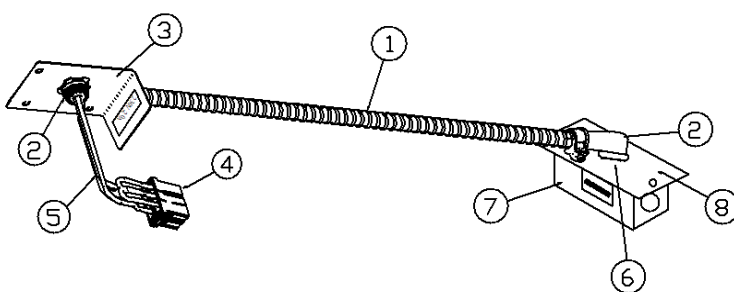

Typical Installation with Part# PTAC-SUBBASE-A

Item	Description
1	3/8 x 21-in Flexible Steel Conduit
2	3/8-in 90° Conduit Connector
3	Mounting Bracket
4	Unit Power Connector
5	12 AWG Wire (Length 36-in max.)
6	6-in min. Wire Length from Conduit
7	Electrical Junction Box
8	Electrical Junction Box Cover

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-SUB-HW-230V-20A

PTAC Hardwire Kit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 20 amp conduit hardwire.
- Includes flexible steel conduit and steel electrical junction box.
- Provides direct connection between unit and subbase.
- Easy unit disconnect for maintenance.
- For Gree ETAC2 models ONLY.
- Must be used with non-electrical subbase (Part#: PTAC-SUBBASE-A)

**Specifications**

Physical:

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green

Electrical:


Voltage Rating: 208/230v
 Current Rating: 20 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	21.0-in
Height	3/8-in
Depth	3/8-in
Weight	1.0-lbs

Shipping Dimensions

Length	15.0-in
Height	3.0-in
Depth	15.0-in
Weight	1.0-lbs

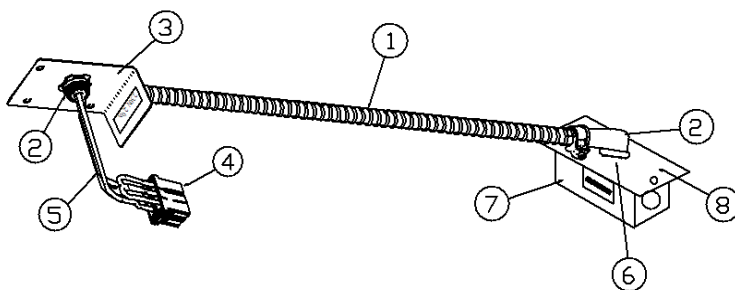

Typical Installation with Part# PTAC-SUBBASE-A

Item	Description
1	3/8 x 21-in Flexible Steel Conduit
2	3/8-in 90° Conduit Connector
3	Mounting Bracket
4	Unit Power Connector
5	12 AWG Wire (Length 36-in max.)
6	6-in min. Wire Length from Conduit
7	Electrical Junction Box
8	Electrical Junction Box Cover

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-SUB-HW-230V-30A**PTAC Hardwire Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 208/230V 30 amp conduit hardwire.
- Includes flexible steel conduit and steel electrical junction box.
- Provides direct connection between unit and subbase.
- Easy unit disconnect for maintenance.
- For Gree ETAC2 models ONLY.
- Must be used with non-electrical subbase (Part#: PTAC-SUBBASE-A)

**Specifications****Physical:**

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/Red/Green

Electrical:


Voltage Rating: 208/230v
 Current Rating: 30 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	21.0-in
Height	3/8-in
Depth	3/8-in
Weight	1.0-lbs

Shipping Dimensions

Length	15.0-in
Height	3.0-in
Depth	15.0-in
Weight	1.0-lbs

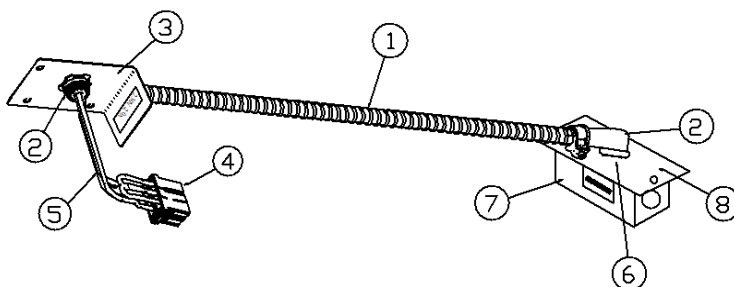

Typical Installation with Part# PTAC-SUBBASE-A

Item	Description
1	3/8 x 21-in Flexible Steel Conduit
2	3/8-in 90° Conduit Connector
3	Mounting Bracket
4	Unit Power Connector
5	12 AWG Wire (Length 36-in max.)
6	6-in min. Wire Length from Conduit
7	Electrical Junction Box
8	Electrical Junction Box Cover

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-SUB-HW-265V-15A**PTAC Hardwire Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 15 amp conduit hardwire.
- Includes flexible steel conduit and steel electrical junction box.
- Provides direct connection between unit and subbase.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.
- Must be used with non-electrical subbase (Part#: PTAC-SUBBASE-A)

**Specifications****Physical:**

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:


Voltage Rating: 265v
 Current Rating: 15 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	21.0-in
Height	3/8-in
Depth	3/8-in
Weight	1.0-lbs

Shipping Dimensions

Length	15.0-in
Height	3.0-in
Depth	15.0-in
Weight	1.0-lbs

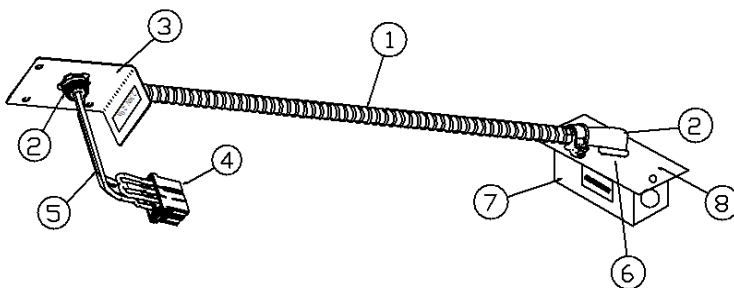

Typical Installation with Part# PTAC-SUBBASE-A

Item	Description
1	3/8 x 21-in Flexible Steel Conduit
2	3/8-in 90° Conduit Connector
3	Mounting Bracket
4	Unit Power Connector
5	12 AWG Wire (Length 36-in max.)
6	6-in min. Wire Length from Conduit
7	Electrical Junction Box
8	Electrical Junction Box Cover

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-SUB-HW-265V-20A**PTAC Hardwire Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 20 amp conduit hardwire.
- Includes flexible steel conduit and steel electrical junction box.
- Provides direct connection between unit and subbase.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.
- Must be used with non-electrical subbase (Part#: PTAC-SUBBASE-A)

**Specifications****Physical:**

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:


Voltage Rating: 265v
 Current Rating: 20 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	21.0-in
Height	3/8-in
Depth	3/8-in
Weight	1.0-lbs

Shipping Dimensions

Length	15.0-in
Height	3.0-in
Depth	15.0-in
Weight	1.0-lbs

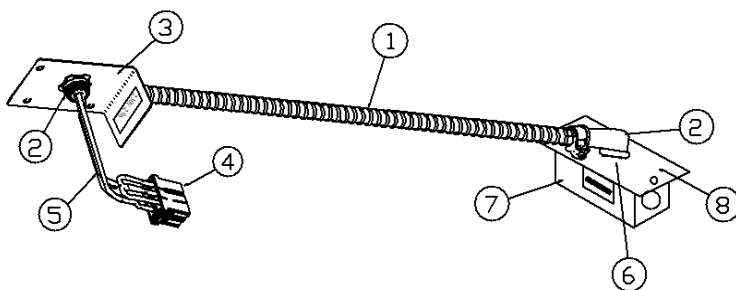

Typical Installation with Part# PTAC-SUBBASE-A

Item	Description
1	3/8 x 21-in Flexible Steel Conduit
2	3/8-in 90° Conduit Connector
3	Mounting Bracket
4	Unit Power Connector
5	12 AWG Wire (Length 36-in max.)
6	6-in min. Wire Length from Conduit
7	Electrical Junction Box
8	Electrical Junction Box Cover

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: E2-SUB-HW-265V-30A**PTAC Hardwire Kit**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Field Installed 265V 30 amp conduit hardwire.
- Includes flexible steel conduit and steel electrical junction box.
- Provides direct connection between unit and subbase.
- Easy unit disconnect for maintenance or service
- For Gree ETAC2 models ONLY.
- Must be used with non-electrical subbase (Part#: PTAC-SUBBASE-A)

**Specifications****Physical:**

Conduit Material: Steel
 Wire: 12 AWG 600V 105°C
 Insulation - 2/64" thick thermoplastic
 Wire Colors: Black/White/Green

Electrical:


Voltage Rating: 265v
 Current Rating: 30 amp
 Unit Power Connection: Gree ETAC2

Unit Dimensions

Length	21.0-in
Height	3/8-in
Depth	3/8-in
Weight	1.0-lbs

Shipping Dimensions

Length	15.0-in
Height	3.0-in
Depth	15.0-in
Weight	1.0-lbs

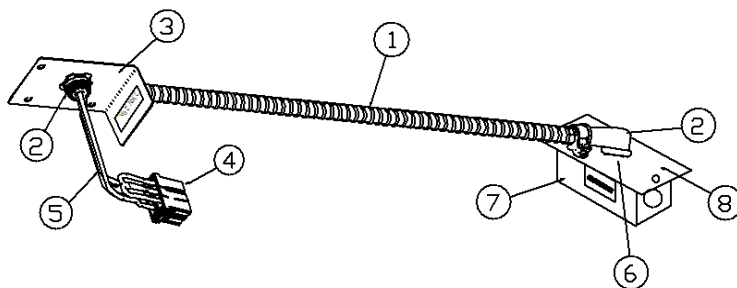

Typical Installation with Part# PTAC-SUBBASE-A

Item	Description
1	3/8 x 21-in Flexible Steel Conduit
2	3/8-in 90° Conduit Connector
3	Mounting Bracket
4	Unit Power Connector
5	12 AWG Wire (Length 36-in max.)
6	6-in min. Wire Length from Conduit
7	Electrical Junction Box
8	Electrical Junction Box Cover

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-230V-15A

PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals excess unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications**

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

Electrical:

Voltage Rating: 208/230v

Current Rating: 15 amp

Receptacle Type: NEMA 6-15




* including paint.

Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

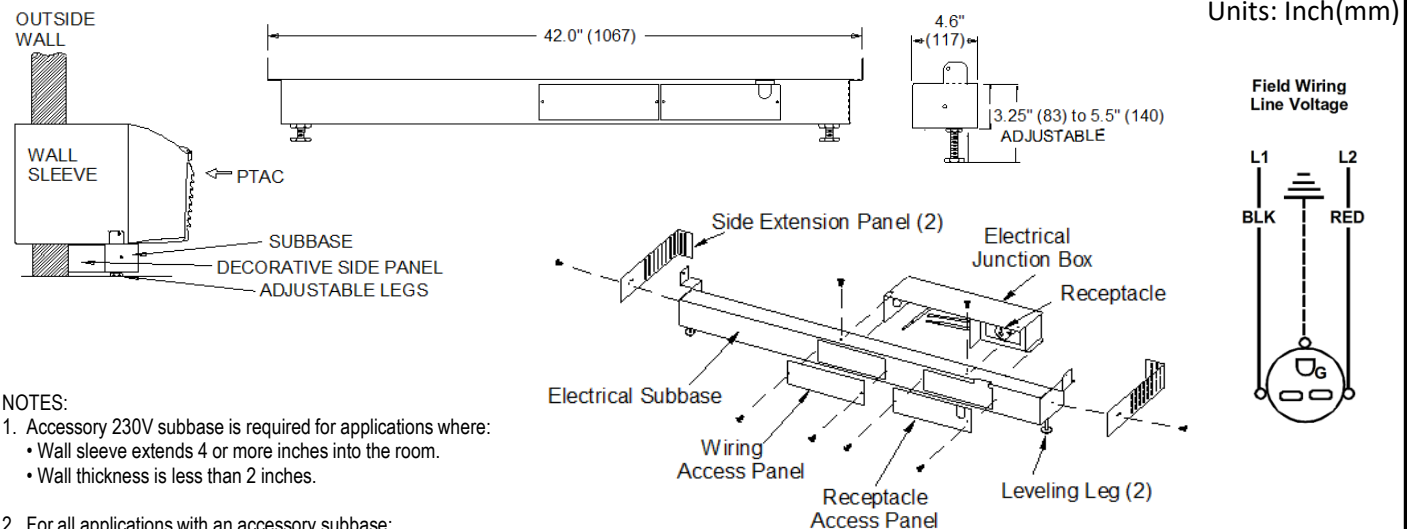**NOTES:**

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-230V-20A

PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals excess unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications**

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

Electrical:

Voltage Rating: 208/230v

Current Rating: 20 amp

Receptacle Type: NEMA 6-20




* including paint.

Unit Dimensions


Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

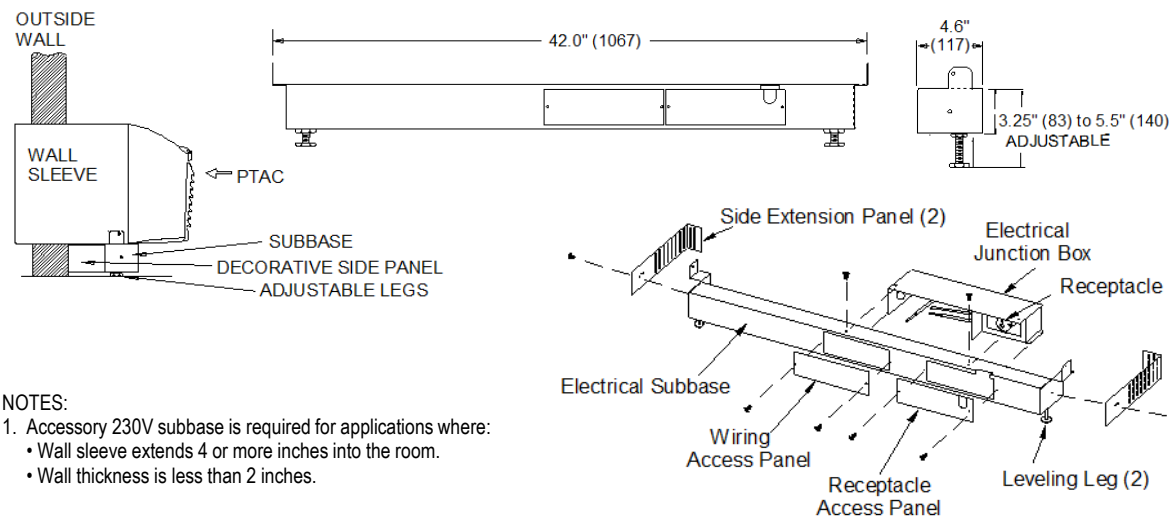

Units: Inch(mm)

Field Wiring Line Voltage**NOTES:**

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-230V-30A

PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals excess unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications**

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black


Finish: Powder coated paint

Electrical:

Voltage Rating: 208/230v

Current Rating: 30 amp

Receptacle Type: NEMA 6-30




* including paint.

Unit Dimensions


Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

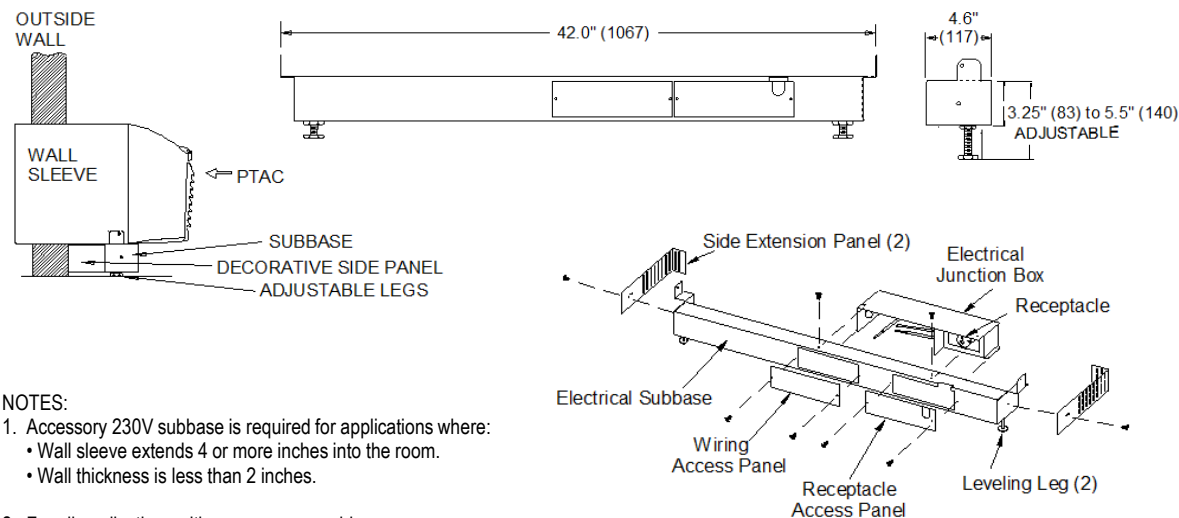

Units: Inch(mm)

**NOTES:**

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-265V-15A

PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Steel chase-way between unit and subbase to hide power cord.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications**

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

Electrical:

Voltage Rating: 265v

Current Rating: 15 amp

Receptacle Type: NEMA 7-15




* including paint.

Unit Dimensions


Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

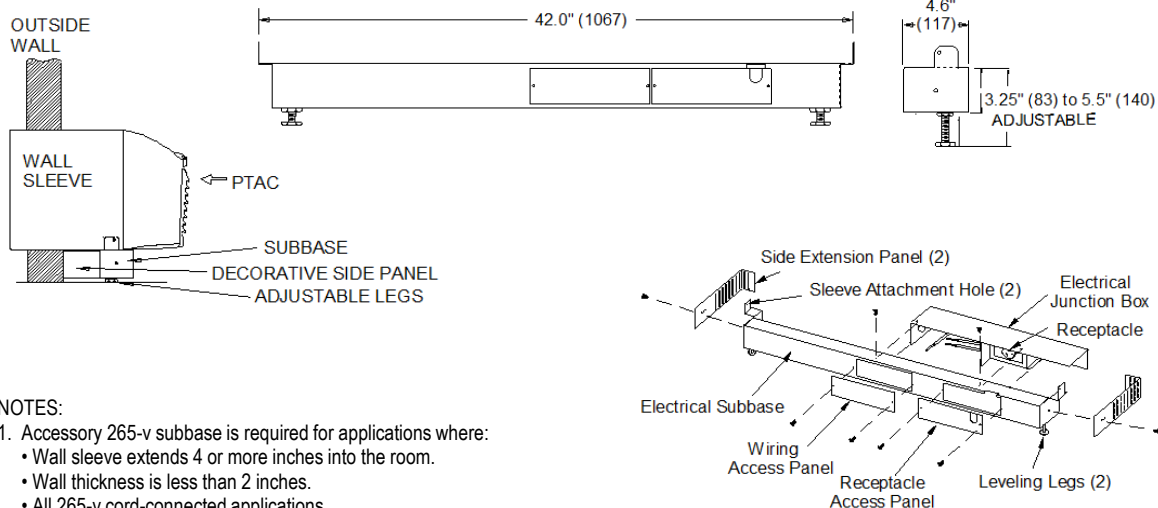

Units: Inch(mm)

Field Wiring
Line Voltage**NOTES:**

- Accessory 265-v subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-265V-20A

PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Steel chase-way between unit and subbase to hide power cord.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications**

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

Electrical:

Voltage Rating: 265v

Current Rating: 20 amp

Receptacle Type: NEMA 7-20





* including paint.

Unit Dimensions



Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

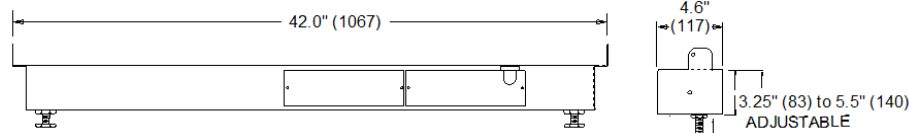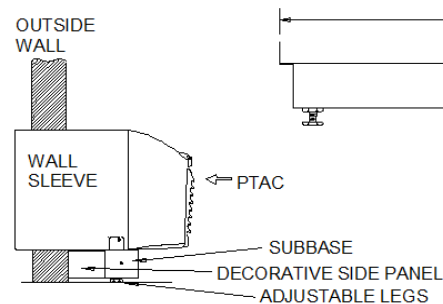

Units: Inch(mm)

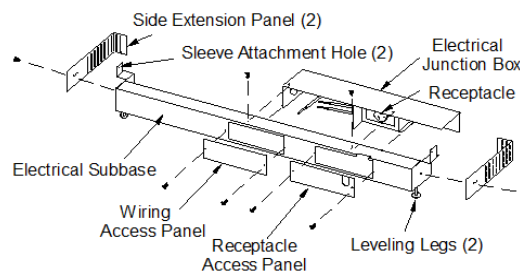Field Wiring
Line Voltage**NOTES:**

- Accessory 265-v subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-265V-30A

PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Steel chase-way between unit and subbase to hide power cord.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications**

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

Electrical:

Voltage Rating: 265v

Current Rating: 30 amp

Receptacle Type: NEMA 7-30



* including paint.



Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

Units: Inch(mm)

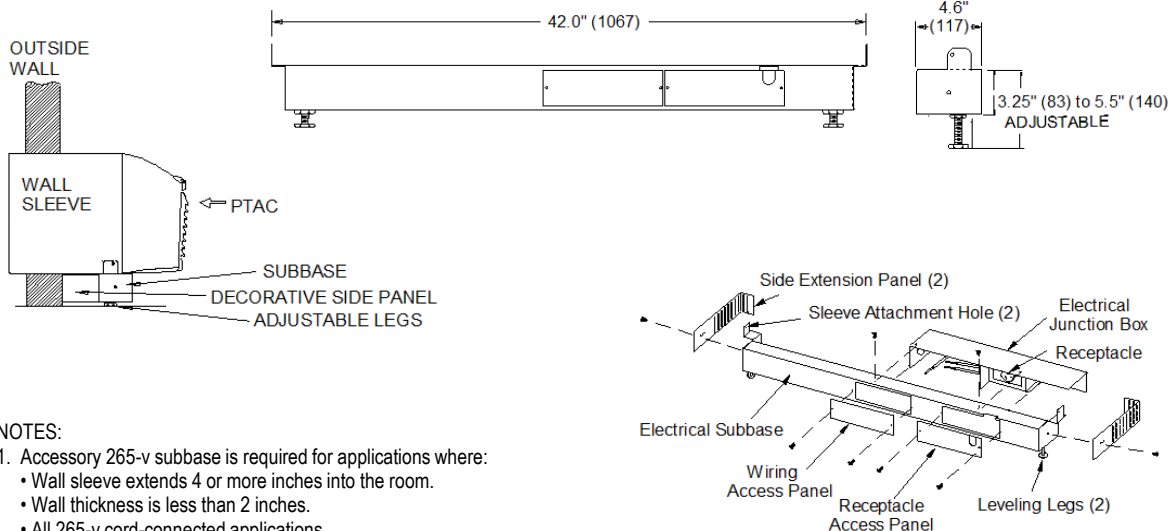Field Wiring
Line Voltage**NOTES:**

- Accessory 265-v subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-HW-230V-15A**PTAC Electrical Subbase**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Contains factory installed 208/230v 15 amp hardwire whip.
- Provides direct connection between unit and subbase.
- Easy electrical disconnect for maintenance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Multiple electrical knockouts for fast and easy installation.
- Decorative side skirting for finished appearance.
- For ETAC2 models ONLY.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications****Physical:**

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

* including paint.

Electrical:

Voltage Rating: 208/230v

Current Rating: 15 amp

Unit Power Connection: Gree ETAC2

Conduit Material: Steel

Wire: 12 AWG 600V 105°C 2/64-in thick insulation



Wire Colors: Black/Red/Green

Unit Dimensions


Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

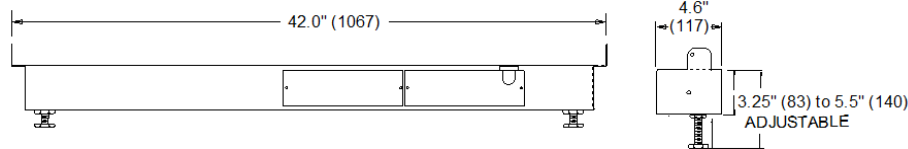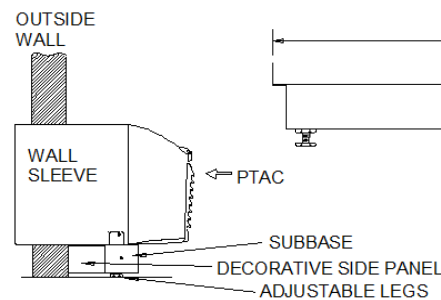

Units: Inch(mm)

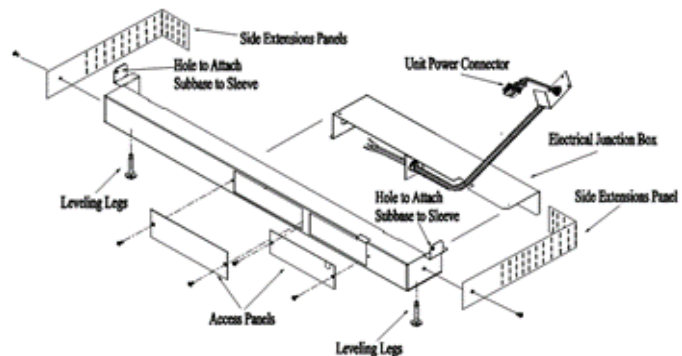**NOTES:**

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-HW-230V-20A**PTAC Electrical Subbase**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Contains factory installed 208/230v 20 amp hardwire whip.
- Provides direct connection between unit and subbase.
- Easy electrical disconnect for maintenance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Multiple electrical knockouts for fast and easy installation.
- Decorative side skirting for finished appearance.
- For ETAC2 models ONLY.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications****Physical:**

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

* including paint.

Electrical:

Voltage Rating: 208/230v

Current Rating: 20 amp

Unit Power Connection: Gree ETAC2

Conduit Material: Steel

Wire: 12 AWG 600V 105°C 2/64-in thick insulation



Wire Colors: Black/Red/Green

Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

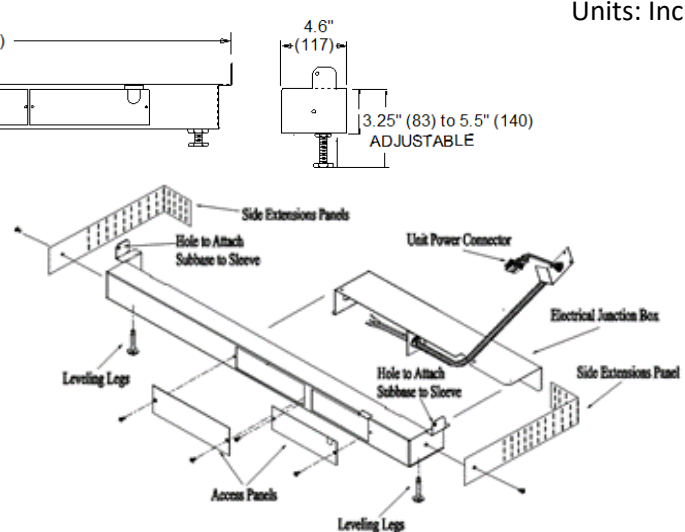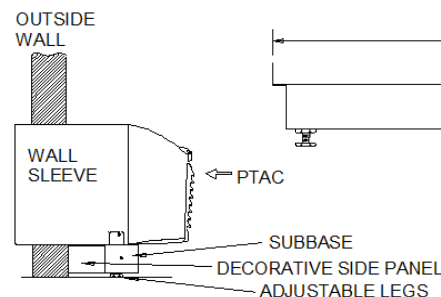

Units: Inch(mm)

NOTES:

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-HW-230V-30A**PTAC Electrical Subbase**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Contains factory installed 208/230v 30 amp hardwire whip.
- Provides direct connection between unit and subbase.
- Easy electrical disconnect for maintenance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Multiple electrical knockouts for fast and easy installation.
- Decorative side skirting for finished appearance.
- For ETAC2 models ONLY.
- Optional field installed pre-wired disconnect switch and fuse kits.

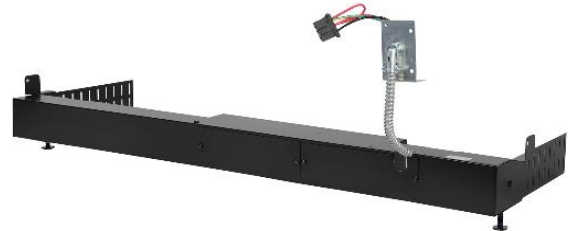**Specifications****Physical:**

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

* including paint.

Electrical:

Voltage Rating: 208/230v

Current Rating: 30 amp

Unit Power Connection: Gree ETAC2

Conduit Material: Steel

Wire: 12 AWG 600V 105°C 2/64-in thick insulation



Wire Colors: Black/Red/Green

Unit Dimensions


Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

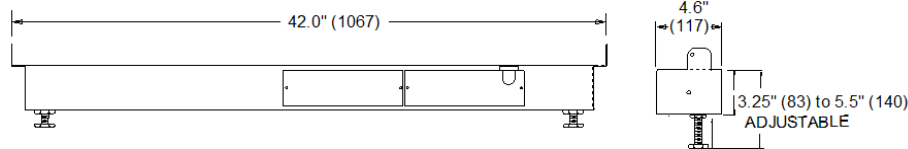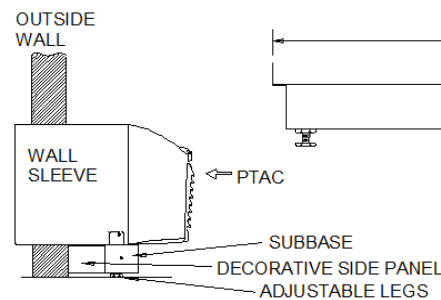

Units: Inch(mm)

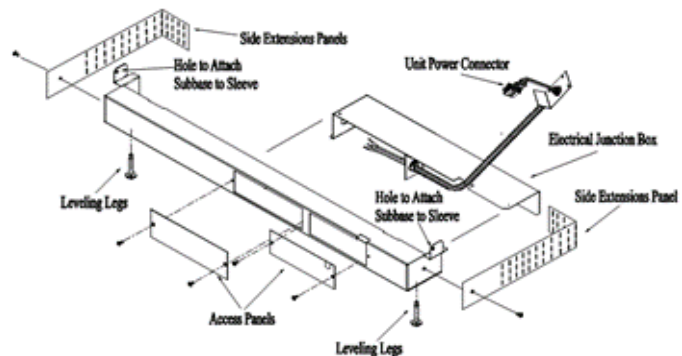**NOTES:**

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-HW-265V-15A PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Contains factory installed 265v 15 amp hardwire whip.
- Provides direct connection between unit and subbase.
- Easy electrical disconnect for maintenance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Multiple electrical knockouts for fast and easy installation.
- Decorative side skirting for finished appearance.
- For ETAC2 models ONLY.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications****Physical:**

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

* including paint.

Electrical:

Voltage Rating: 265v

Current Rating: 15 amp

Unit Power Connection: Gree ETAC2

Conduit Material: Steel

Wire: 12 AWG 600V 105°C 2/64-in thick insulation


Wire Colors: Black/White/Green

Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

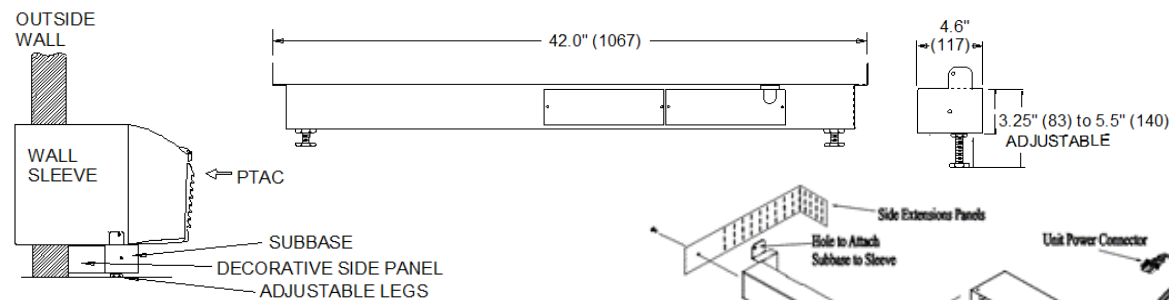

Units: Inch(mm)

NOTES:

- Accessory 265V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-HW-265V-20A**PTAC Electrical Subbase**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Contains factory installed 265v 20 amp hardwire whip.
- Provides direct connection between unit and subbase.
- Easy electrical disconnect for maintenance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Multiple electrical knockouts for fast and easy installation.
- Decorative side skirting for finished appearance.
- For ETAC2 models ONLY.
- Optional field installed pre-wired disconnect switch and fuse kits.

**Specifications****Physical:**

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

* including paint.

Electrical:

Voltage Rating: 265v

Current Rating: 20 amp

Unit Power Connection: Gree ETAC2

Conduit Material: Steel

Wire: 12 AWG 600V 105°C 2/64-in thick insulation

Wire Colors: Black/White/Green




Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

OUTSIDE WALL

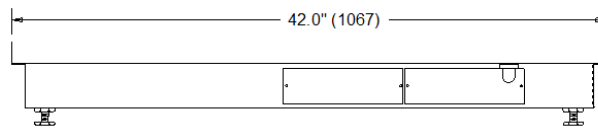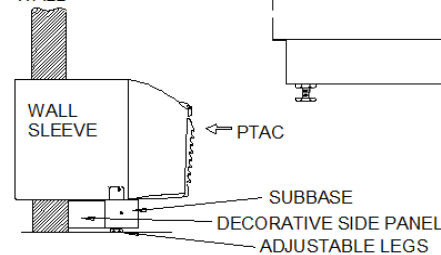

Units: Inch(mm)


NOTES:

1. Accessory 265V subbase is required for applications where:

- Wall sleeve extends 4 or more inches into the room.
- Wall thickness is less than 2 inches.

2. For all applications with an accessory subbase:

- Wall sleeve must extend 3 in. minimum into the room.
- Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
- Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

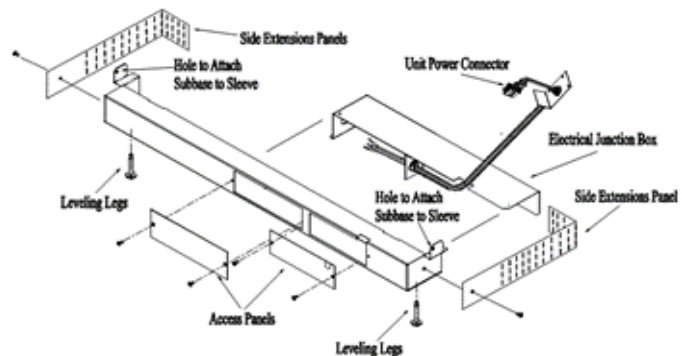


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-HW-265V-30A PTAC Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Contains factory installed 265v 30 amp hardwire whip.
- Provides direct connection between unit and subbase.
- Easy electrical disconnect for maintenance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Multiple electrical knockouts for fast and easy installation.
- Decorative side skirting for finished appearance.
- For ETAC2 models ONLY.
- Optional field installed pre-wired disconnect switch and fuse kits.

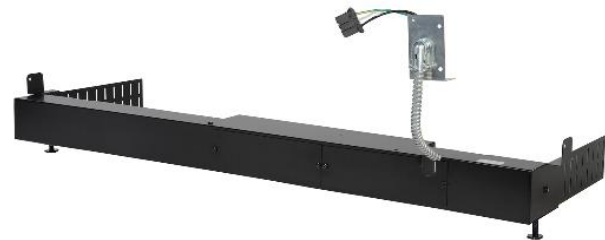**Specifications****Physical:**

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

* including paint.

Electrical:

Voltage Rating: 265v

Current Rating: 30 amp

Unit Power Connection: Gree ETAC2

Conduit Material: Steel

Wire: 12 AWG 600V 105°C 2/64-in thick insulation


Wire Colors: Black/White/Green

Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs

Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

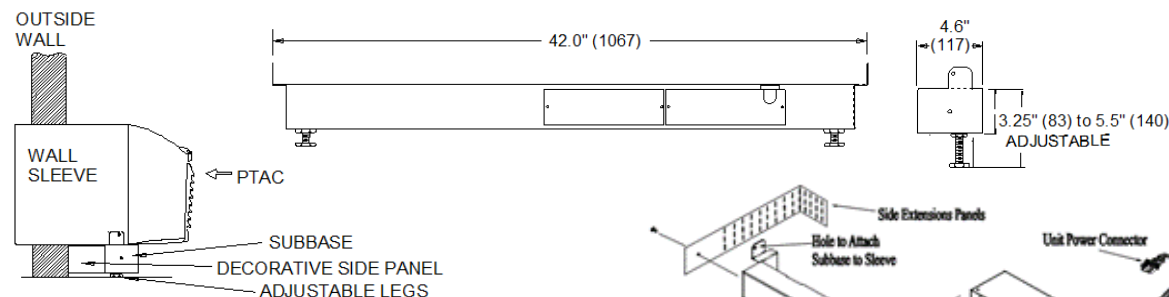

Units: Inch(mm)

NOTES:

- Accessory 265V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: PTAC-SUBBASE-A**PTAC Non-Electrical Subbase**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Field installed receptacle, disconnect switch and fuse kits available.

**Specifications**

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Color: Black
 Finish: Powder coated paint

* including paint.



Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	1.5-in
Weight	4.0-lbs


Shipping Dimensions

Length	43.0-in
Height	5.5-in
Depth	2.0-in
Weight	4.5-lbs
Pallet Qty	160 pcs

Units: Inch(mm)

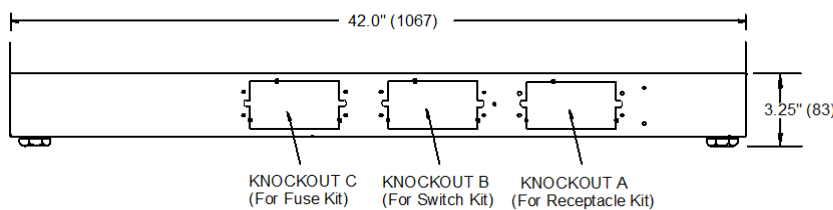**NOTES:**

- Accessory subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room when adding one of the electrical kits.
 - Wall sleeve must be installed 3-1/4 in. minimum and 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

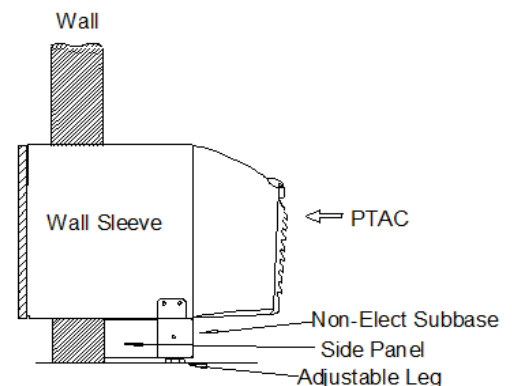

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-SWITCH-A

PTAC Subbase Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts up to 30 amps.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. PTAC-SUBBASE-A

**Specifications****Physical:**

Color: Black
Finish: Powder coated paint

Electrical:




Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25in
Height	2.75-in
Depth	2.0-in
Weight	1.0-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	1.5-lbs

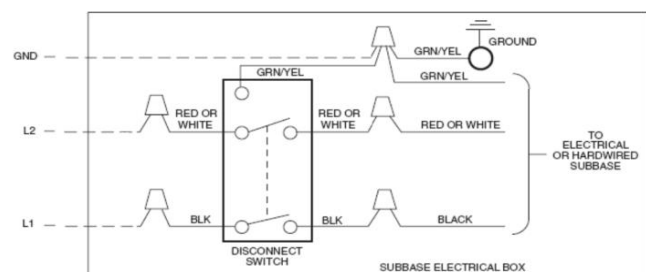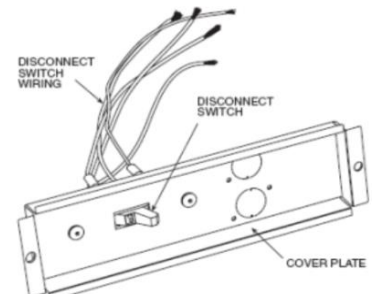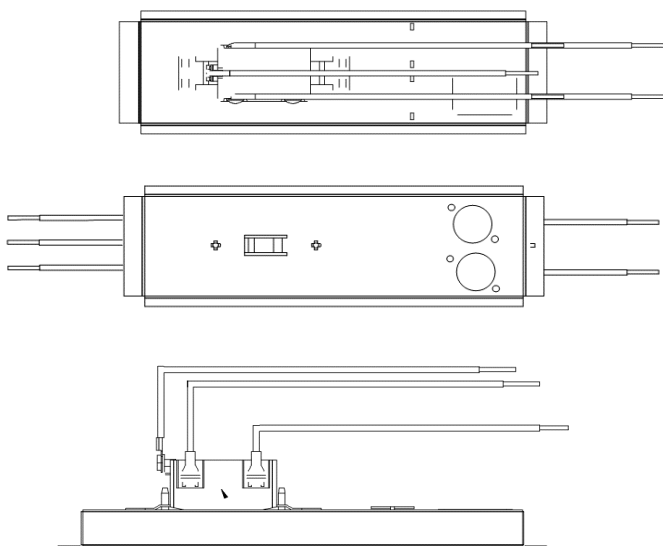

LEGEND
 - - - Field-Supplied (Power Supply) Wire
 ——— Factory-Supplied Wire
 △ Wire Connector (By Others)
 ○ Component Connection (Unmarked)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-FUSE-15A

PTAC Subbase Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Two (2) pre-wired fuse holders and cartridge fuses included.
- Over-current protection to both electrical legs.
- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. PTAC-SUBBASE-A

**Specifications**

Physical:

Color: Black
Finish: Powder coated paint

Electrical (Fuse):

Voltage Rating: 208/230/265v
Current Rating: 15 amp

Electrical (Switch):





Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25in
Height	2.75-in
Depth	2.0-in
Weight	1.5-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	2.0-lbs

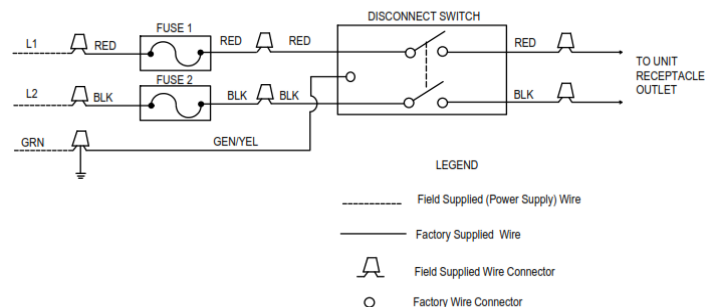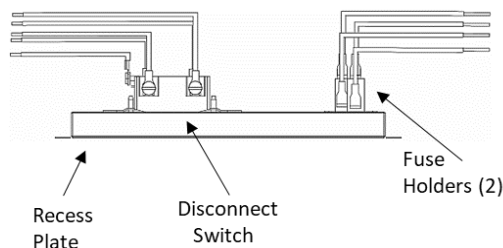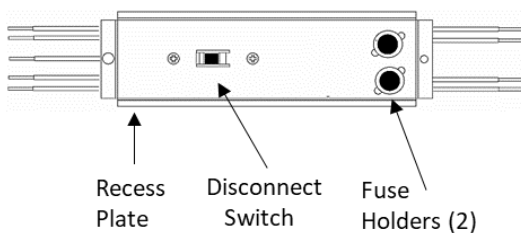

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-FUSE-20A

PTAC Subbase Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Two (2) pre-wired fuse holders and cartridge fuses included.
- Over-current protection to both electrical legs.
- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. PTAC-SUBBASE-A

**Specifications**

Physical:

Color: Black
Finish: Powder coated paint

Electrical (Fuse):

Voltage Rating: 208/230/265v
Current Rating: 20 amp

Electrical (Switch):





Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25in
Height	2.75-in
Depth	2.0-in
Weight	1.5-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	2.0-lbs

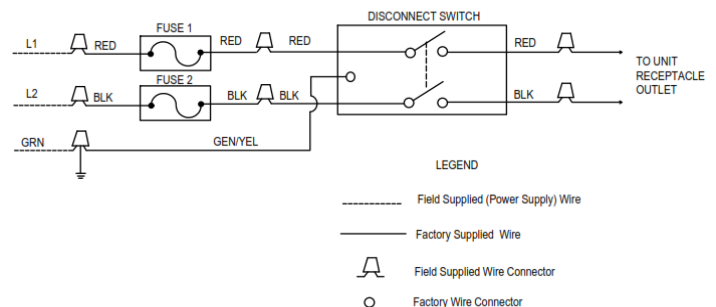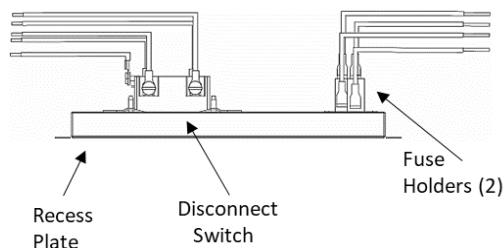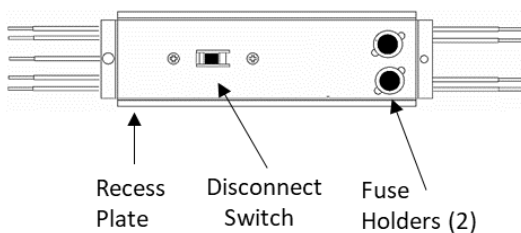

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-FUSE-30A

PTAC Subbase Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Two (2) pre-wired fuse holders and cartridge fuses included.
- Over-current protection to both electrical legs.
- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. PTAC-SUBBASE-A

**Specifications**

Physical:

Color: Black
Finish: Powder coated paint

Electrical (Fuse):

Voltage Rating: 208/230/265v
Current Rating: 30 amp

Electrical (Switch):





Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25in
Height	2.75-in
Depth	2.0-in
Weight	1.5-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	2.0-lbs

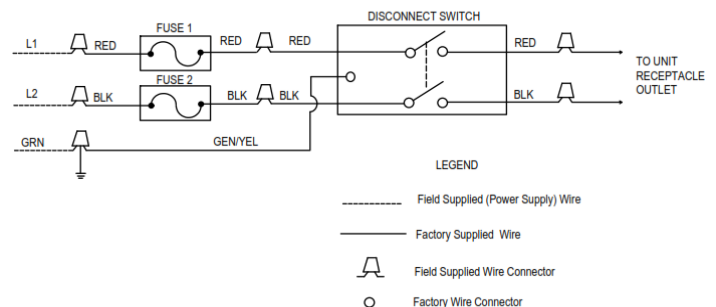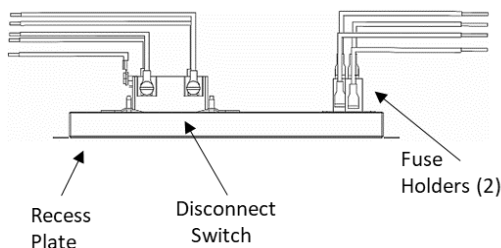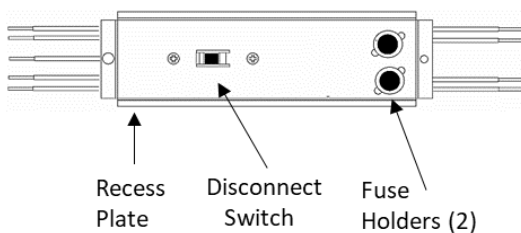

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SUBBASE-PANEL-A

PTAC Subbase Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Fits subbase part# PTAC-SUBBASE-A.
- Hides and protects the disconnect switch and electrical outlet.
- Decorative front skirting for finished appearance.
- One piece seamless design.
- Made of heavy duty steel.
- Mounts easily and securely to subbase.
- Powder coated paint for superior adhesion & protection.
- Can only be used with non-electrical subbase (Part#: PTAC-SUBBASE-A)

**Specifications**

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Color: Black


Unit Dimensions

Length	42.125-in
Height	3.0-in
Depth	6.5-in
Weight	4.0-lbs

Shipping Dimensions

Length	43.0-in
Height	3.25-in
Depth	7.0-in
Weight	4.5-lbs
Pallet Qty	72 pcs

* including paint.

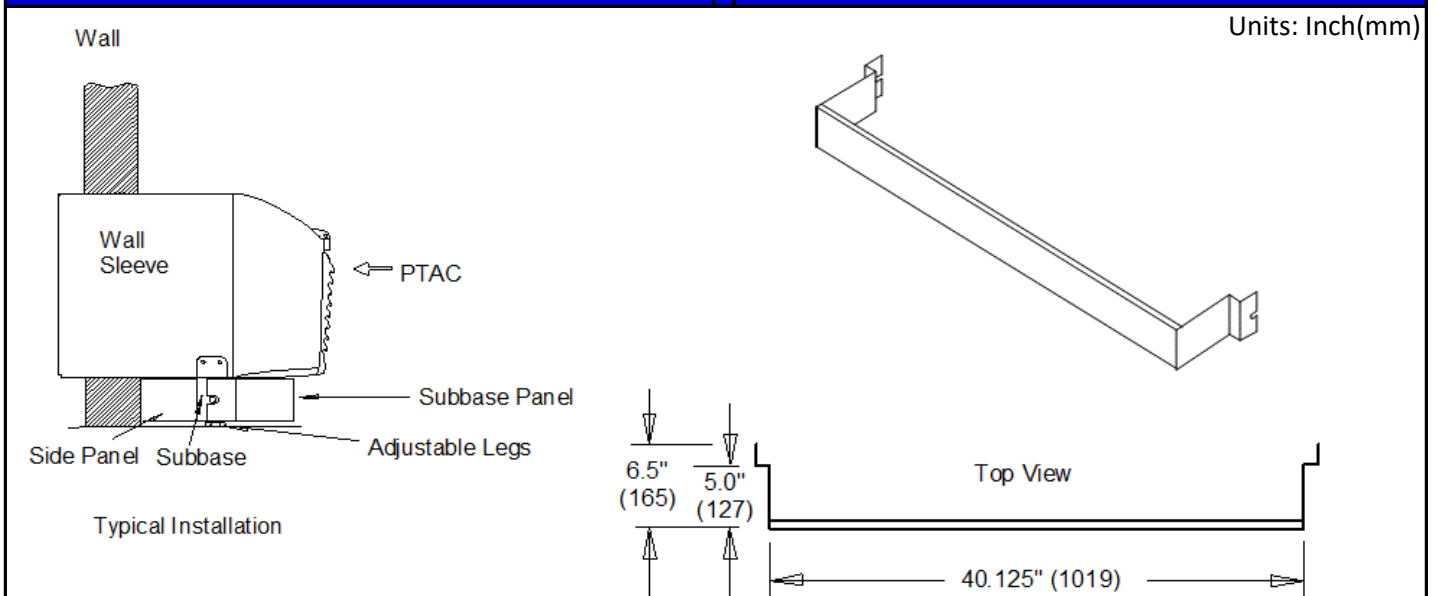

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: LEVELING-LEGS

PTAC Non-Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Two (2) legs per pack.

**Specifications**

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Color: Black
 Finish: Powder coated paint

* including paint.


Unit Dimensions

Length	3.25-in
Height	1.5-in
Depth	1.5-in
Weight	1.0-lbs

Shipping Dimensions

Length	5.0-in
Height	2.0-in
Depth	3.25-in
Weight	1.0-lbs
Pallet Qty	2920 pcs

Wall

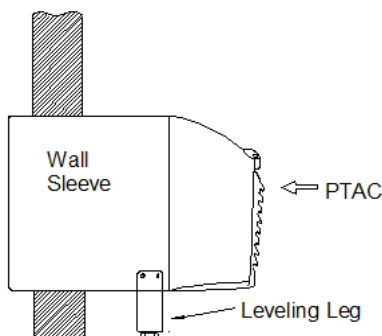


Typical Installation

NOTES:


- 1) Accessory Leveling Legs are required for applications where wall sleeve extends 4 or more inches into the room or wall thickness is less than 2 inches.
- 2) For proper fit, wall sleeve must be installed 3-1/4 inches (minimum) to 5-1/2 inches (maximum) above floor including carpeting.

Units: Inch(mm)

(TOP VIEW)



(SIDE VIEW)

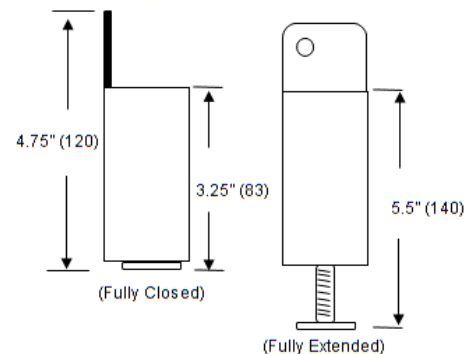

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: PTAC-DEFLECTOR-A**PTAC Air Deflector**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Washable nylon mesh material
- Durable polycarbonate
- UV Resistant
- 70° air deflection angle
- Washable nylon mesh material
- Easy to install with no tools needed
- Attaches with pressure sensitive adhesive

**Specifications**

Material: Polycarbonate
 Color: Transparent
 Louver Thickness: 0.0625 inch (2 mm), nominal
 Louver Pitch: 70°



Unit Dimensions

Length	30.0-in
Height	4.5-in
Depth	0.0625-in
Weight	1.0-lbs

Shipping Dimensions

Length	32.0-in
Height	6.0-in
Depth	1.0-in
Weight	2.0-lbs

Units: Inch(mm)

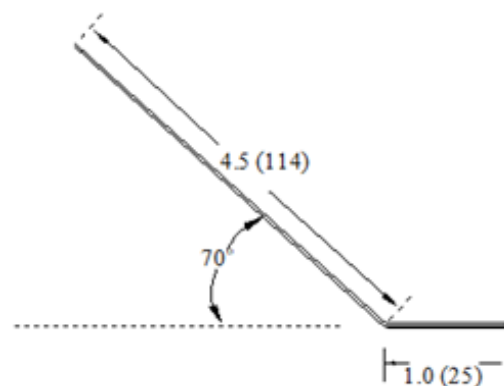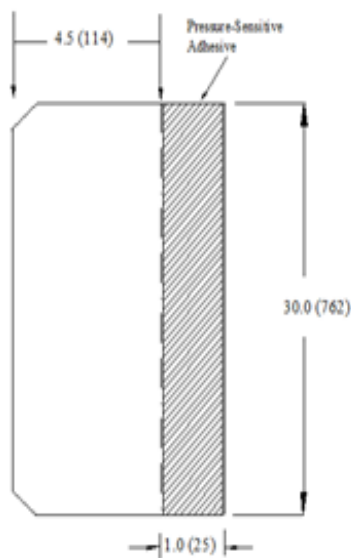

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: LATERAL_DUCT**Lateral Duct**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- One unit to heat or cool two separate rooms.
- Easily mounts to front of standard wall sleeve.
- Lined with acoustical & thermal insulation.
- 46-inch extension duct.
- Adjustable room duct register.
- Extension Duct may be directed to left or right side of the unit.

**Specifications**

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Alpine Beige
 Finish: Lightly Textured

Dimensions




	Plenum w/out Transition	Extension Duct
Length	44.0-in	46-in
Height	3.5-in	3.5-in
Depth	7.0-in	7.0-in
Weight	11-lbs	12-lbs

Shipping Dimensions


Length	47.5-in
Height	8.0-in
Depth	11.5-in
Weight	30.0-lbs
Pallet Qty	15 pcs

* including paint.

Units: Inch(mm)

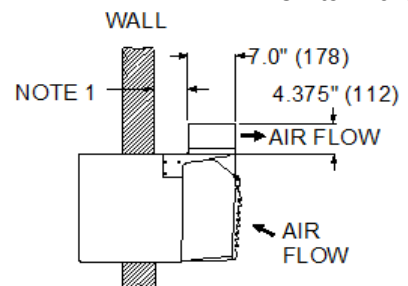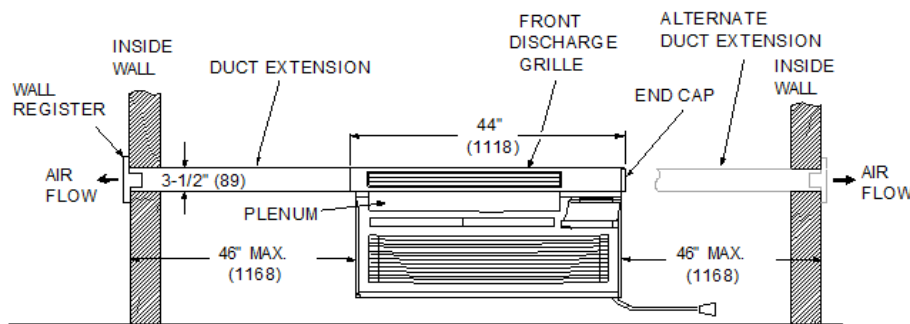**SIDE VIEW****EXTENSION DUCT WALL OPENING****NOTES:**

- 1) For all lateral duct applications, the wall sleeve must extend 3 inches into the room for proper mounting of support brackets.
- 2) Maximum duct extension length is 46 inches.
- 3) Extension duct run must be straight and horizontal; no bends or turns.
- 4) Minimum recommended clearance between unit and adjoining room wall is 6 inches.

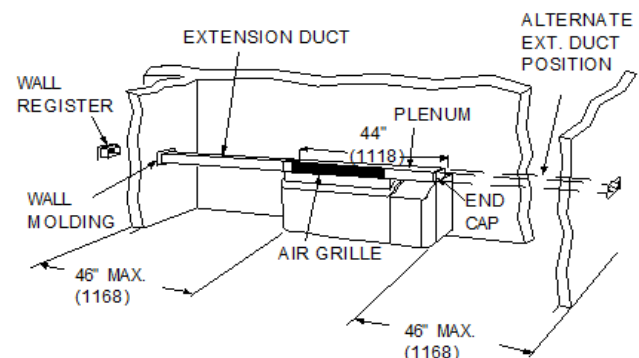

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SLEEVE-TTW-25**Through-The-Wall Metal Wall Sleeve**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Standard 25.5-in (L) x 15.25-in (H) x 17.5-in (D) wall sleeve.
- Easy and effortless snap together design.
- Made of heavy duty Galvanized steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Rear drainage hole on right or left side.
- Optional Condensate Drain Kit (PN: DRAIN-KIT-1PK)
- Optional Arch. Aluminum Rear Grille (PN: GRILLE-TTW-25-CLEAR)

**Specifications**

Material: Hot Dip Galvanized Steel
 Material Thickness*: 0.030 to 0.035-in
 Insulation: None
 Insulation Thickness: None
 Color: White
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute

* including paint.






Unit Dimensions

Length	25.5-in
Height	15.25-in
Depth	17.5-in
Weight	19.5-lbs

Shipping Dimensions

Length	28.5-in
Height	19.0-in
Depth	3.0-in
Weight	20.0-lbs
Pallet Qty	38 pcs

Units: Inch (mm)

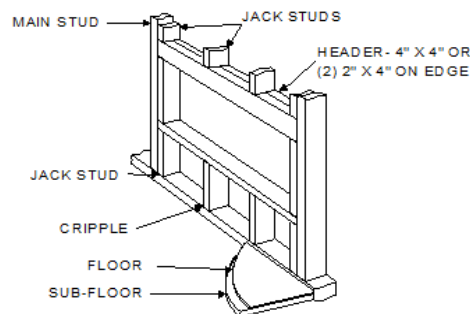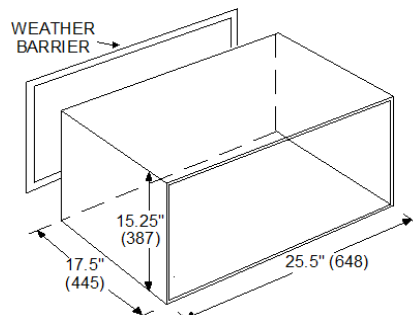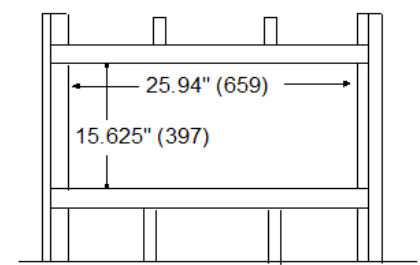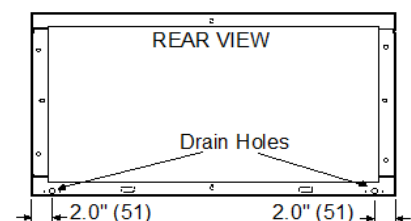Typical Installation**Framing Wall Sleeve Opening****Minimum Wall Sleeve Opening****Drain Hole Locations**

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-TTW-25-CLEAR

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Clear anodized aluminum color.
- Designed to be mounted easily and securely to wall sleeve.
- Must be used with 25-in TTW Wall Sleeve
(Part#: SLEEVE-TTW-25)

**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Clear Anodized
 Louver Thickness: 0.04 inch (1.1 mm), nominal
 Louver Pitch: 30°
 Condenser Free Area: 86 %


Unit Dimensions

Length	25.4-in
Height	15.1-in
Depth	1.14-in
Weight	2.5-lbs

Shipping Dimensions

Length	27.0-in
Height	16.0-in
Depth	2.0-in
Weight	3.0-lbs
Pallet Qty	54 pcs

Units: Inch (mm)

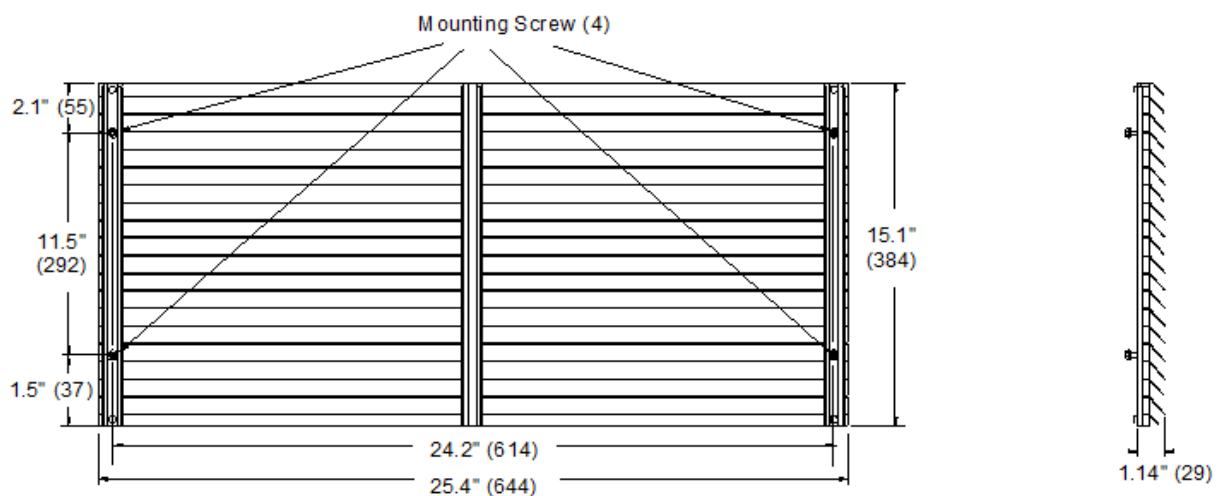

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: SLEEVE-TTW-26**Through-The-Wall Metal Wall Sleeve**

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Standard 26.0-in (L) x 15.6-in (H) x 16.3-in (D) wall sleeve.
- Made of heavy duty galvanized steel.
- Lined with acoustical & thermal insulation.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Rear drainage hole on right side only.
- Optional Condensate Drain Kit (PN: DRAIN-KIT-1PK)
- Optional Arch. Aluminum Rear Grille PN: (GRILLE-TTW-26-CLEAR)

**Specifications**

Material: Hot dipped Galvanized Steel
 Material Thickness*: 0.035 to 0.039-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Alpine Beige
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute

* including paint.






Unit Dimensions

Length	26.0-in
Height	15.6-in
Depth	16.3-in
Weight	20.5-lbs

Shipping Dimensions

Length	29.25-in
Height	17.5-in
Depth	3.0-in
Weight	21.0-lbs
Pallet Qty	26 pcs

Units: Inch (mm)

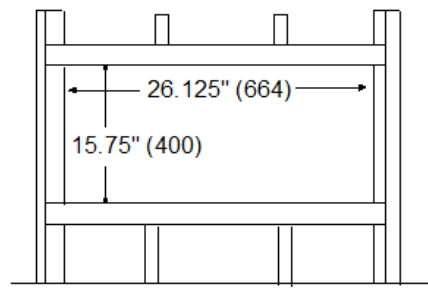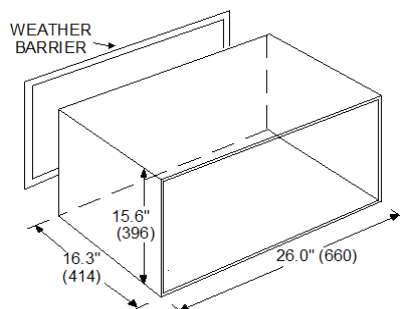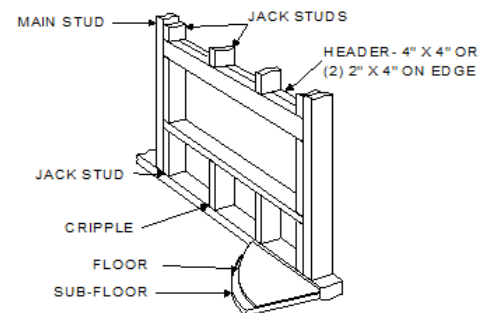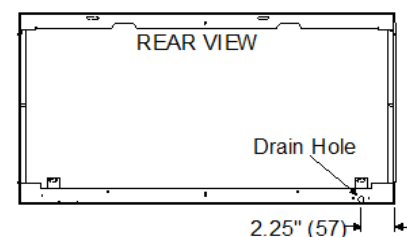Typical Installation**Minimum Wall Sleeve Opening****Framing Wall Sleeve Opening****Drain Hole Location**

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-TTW-26-STAMP

Stamped Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Strong and durable aluminum construction.
- Clear anodized aluminum color.
- Designed to be mounted easily.
- Right side drain hole only.
- Must be used with 26-in TTW Wall Sleeve
(Part#: SLEEVE-TTW-26)

**Specifications**

Material: Aluminum
 Finish: Clear
 Fin Thickness: 1.02 mm
 Condenser Fin Pitch: 80°
 Condenser Free Area: 96 %


Unit Dimensions

Length	25.8-in
Height	15.3-in
Depth	0.37-in
Weight	1.5-lbs

Shipping Dimensions

Length	26.5-in
Height	16.0-in
Depth	1.0-in
Weight	2.0-lbs
Pallet Qty	100 pcs

Units: Inch(mm)

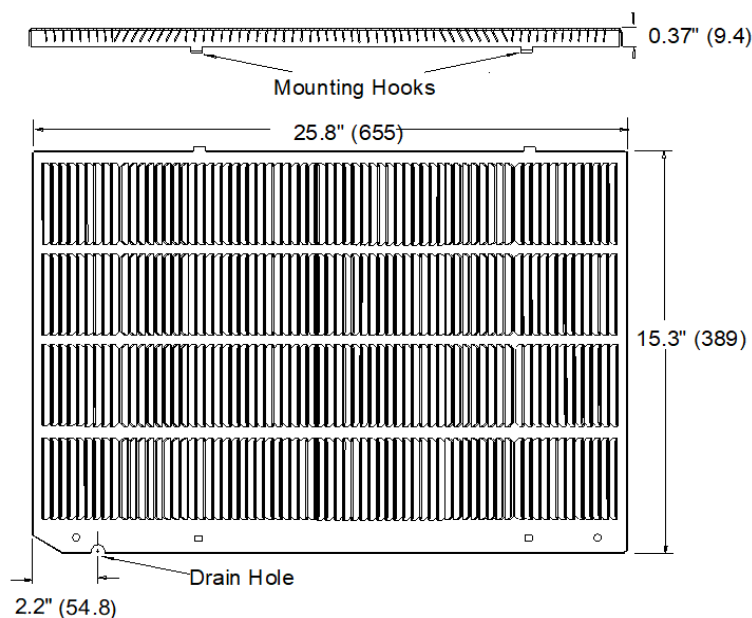

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: GRILLE-TTW-26-CLEAR

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Clear anodized aluminum color.
- Designed to be mounted easily and securely to wall sleeve.
- Must be used with 26-in TTW Wall Sleeve
(Part#: SLEEVE-TTW-26)

**Specifications**

Material: Extruded aluminum, Alloy 6063-T5
 Finish: Clear Anodized
 Louver Thickness: 0.04 inch (1.1 mm), nominal
 Louver Pitch: 30°
 Condenser Free Area: 86%


Unit Dimensions

Length	25.7-in
Height	15.4-in
Depth	1.1-in
Weight	3.5-lbs


Shipping Dimensions

Length	27.0-in
Height	16.0-in
Depth	2.0-in
Weight	4.0-lbs
Pallet Qty	50 pcs



Units: Inch (mm)

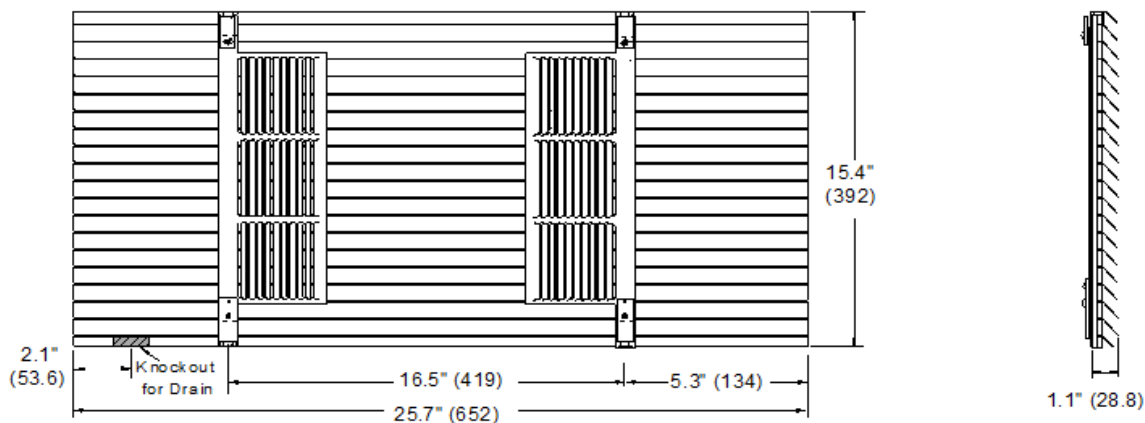

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: DFS-SWITCH-A		Ductfree Accessory	
Job Name	Location	Date	
Purchaser	Engineer		
Submitted To	For	<input type="checkbox"/> Reference	<input type="checkbox"/> Approval <input type="checkbox"/> Construction
Schedule No.			
GENERAL FEATURES <ul style="list-style-type: none"> - Electrical disconnect for an indoor Ductfree mini-split unit. - Contains a 3-pole switch rated at 30A. - Provides a physical power disconnect for indoor units. - Contains electrical junction box, 3-pole switch and cover plate. - Mounts quickly and easily in the wall. 			
Specifications		Unit Dimensions	
Physical: Material: Steel Material Thickness*: 0.0433 to 0.0480-in		Length 3.0-in Height 2.6-in Depth 2.0-in Weight 1.0-lbs	
Electrical: Voltage Rating: 600 VAC (max) Current Rating: 30 amp (max) Horse Power: 7.5 (max)		Shipping Dimensions Length 5.5-in Height 3.25-in Depth 3.5-in Weight 1.1-lbs	
* including paint.			

Units: Inch

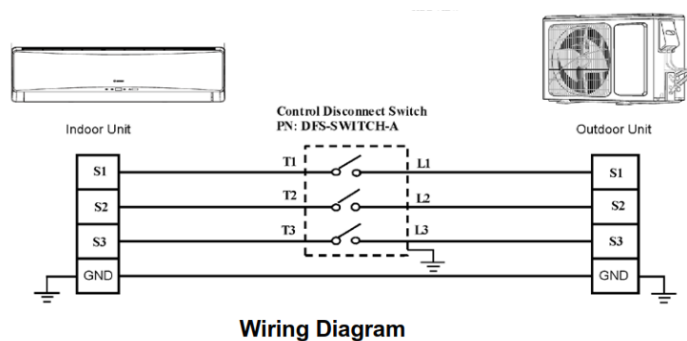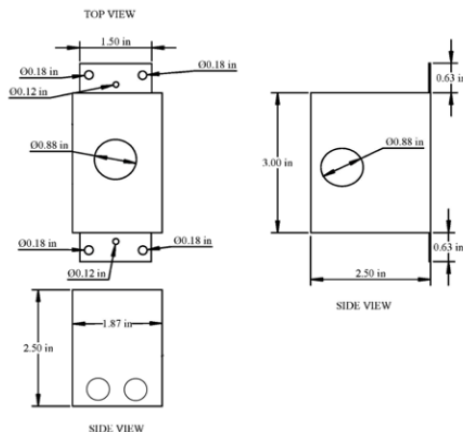

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

PTAC DIRECT SALES, INC.
185 S. KIMBALL AVE., SUITE 130
SOUTHLAKE, TX 76092
877.454.7822

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.