

PTAC DIRECT SALES, INC.
185 S. KIMBALL AVE., SUITE 130
SOUTHLAKE, TX 76092
877.454.7822
www.PTACdirect.com



* All images in this document are for illustrative purposes only.

Commercial TV UK343H Series

Commercial Lite	Pro:Centric Enhanced	Pro:Centric Smart
-----------------	----------------------	-------------------



NanoCell[®] Essential Commercial TV



Nano Panel



4K UHD



Pro:Centric[®]
Direct



Multi-Code
IR

UK343H Series		
Design	Stand Type	1 Pole Fixed: 75" / 65"
		1 Pole Swivel: 55" / 50" / 43"
Display	Sizes	75", 65", 55", 50", 43"
	Resolution	3,840 x 2,160 (4K UHD)
Broadcasting System	Digital	ATSC / Clear QAM
	Analog	NTSC
VESA		[43"] 200 x 200 mm
		[50"] 200 x 200 mm
		[55"] 300 x 300 mm
		[65"] 300 x 300 mm
		[75"] 400 x 400 mm



Nano Panel

Experience the revolutionary technology of NanoCell, which uses a specialized polarizer and non-sized materials to achieve exceptional color reproduction without distortion. Advanced nano technology filters out impure colors from RGB wavelengths, delivering vibrant, pure colors and true 4K visuals. Enjoy lifelike imagery with precise colors and enhanced contrast. By utilizing nano-sized light-absorbing materials, NanoCell separates overlapping green and red wavelengths, expanding the color gamut. Elevate your viewing experience and watch your favorite content come to life!




USB Cloning

USB data cloning makes managing multiple displays more efficient for optimal operation. Instead of setting up each display one by one, data can be copied to a USB for one display and can be sent to the other displays through a USB plug-in.


CONNECTIVITY

75"

Rear

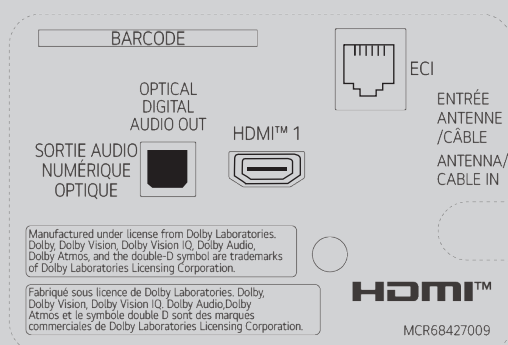

65" / 55" / 50" / 43"

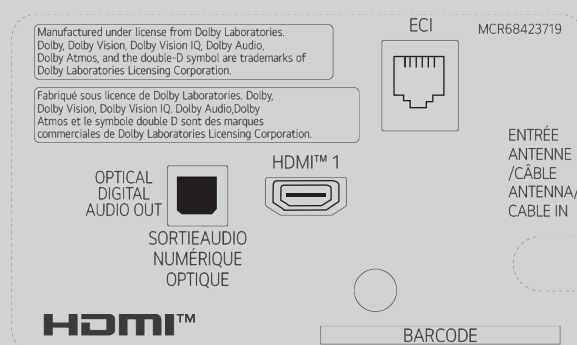


75" / 65" / 55" / 50" / 43"

Side




DIMENSIONED DRAWINGS


75"

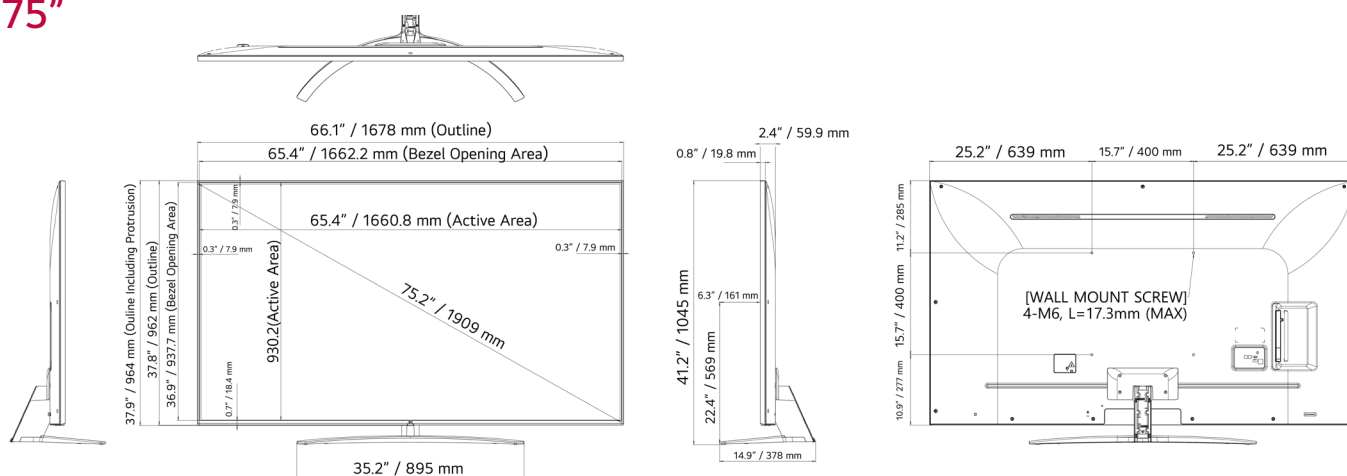

65"

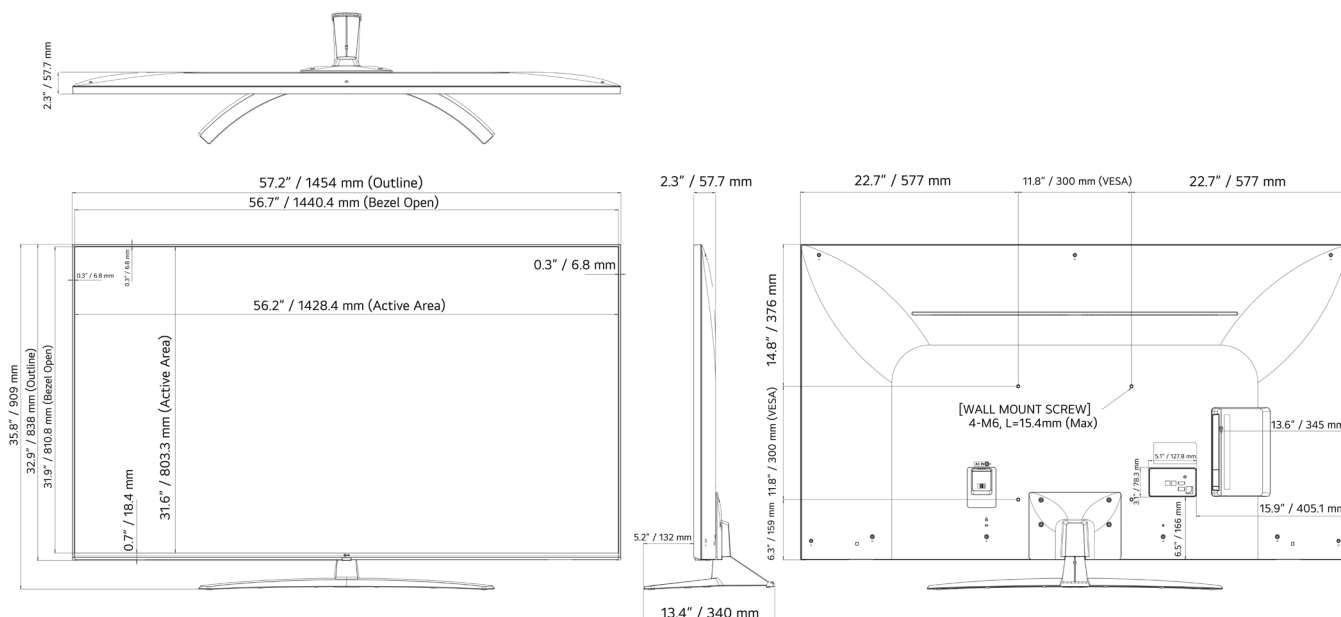


55"

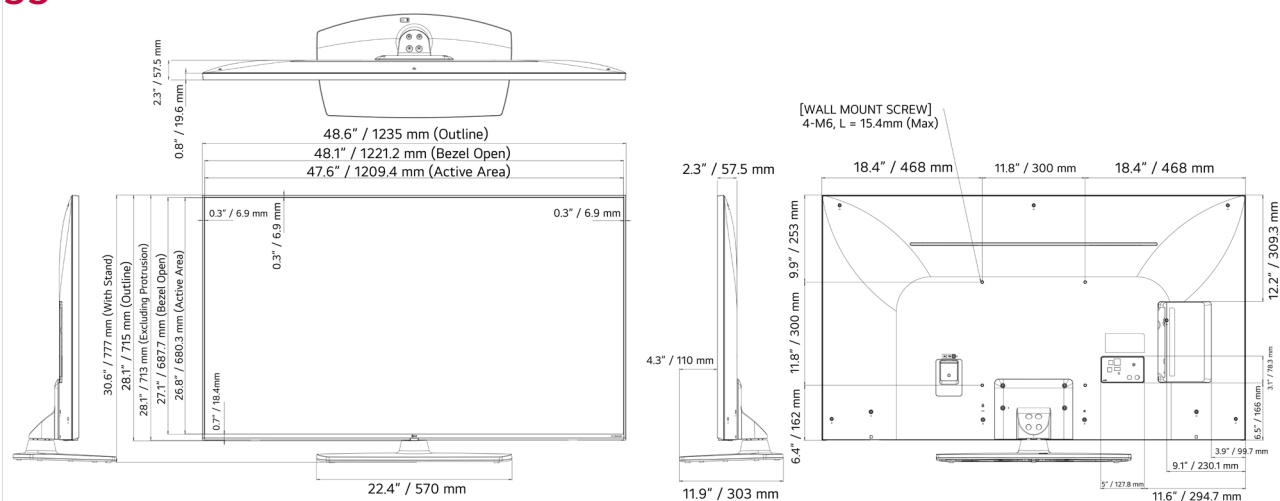


DIMENSIONED DRAWINGS

50"

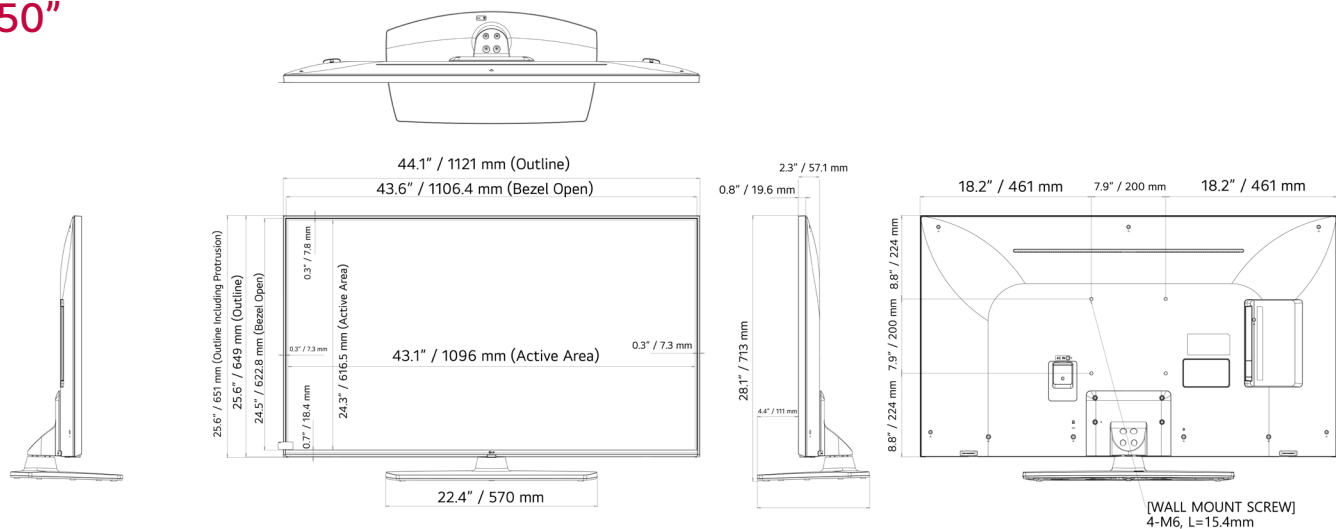

43"

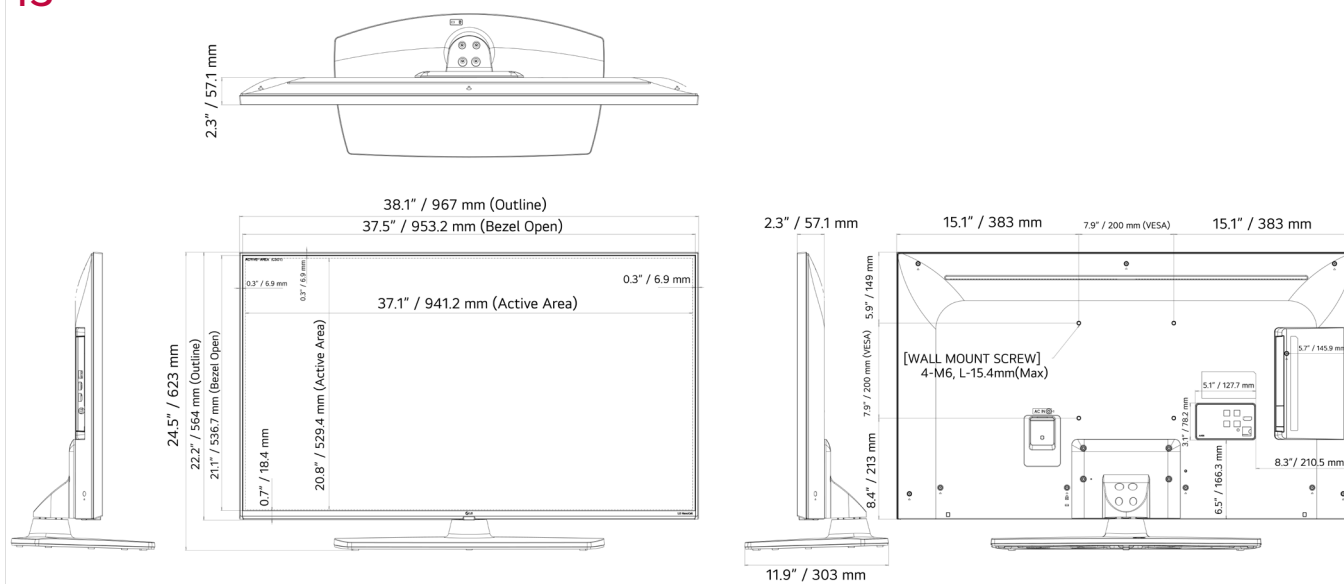

SPECIFICATIONS

		75UK343H0UD	65UK343H0UD	55UK343H0UA	50UK343H0UA	43UK343H0UA
DISPLAY	Category	Commercial Lite	Commercial Lite	Commercial Lite	Commercial Lite	Commercial Lite
	Size	75"	65"	55"	50"	43"
	Resolution	4K Ultra HD (3,840 x 2,160)	4K Ultra HD (3,840 x 2,160)	4K Ultra HD (3,840 x 2,160)	4K Ultra HD (3,840 x 2,160)	4K Ultra HD (3,840 x 2,160)
	Brightness (Typ.)	285 nits	305 nits	305 nits	330 nits	245 nits
VIDEO	HDR_HDR 10 Pro	YES	YES	YES	YES	YES
	HDR_HLG (Hybrid Log Gamma)	YES	YES	YES	YES	YES
	Game Optimizer	YES	YES	YES	YES	YES
AUDIO	Speakers	20W	20W	20W	20W	20W
	AI Sound	YES	YES	YES	YES	YES
BROADCAST	Digital	ATSC / Clear QAM	ATSC / Clear QAM	ATSC / Clear QAM	ATSC / Clear QAM	ATSC / Clear QAM
	Analog	NTSC	NTSC	NTSC	NTSC	NTSC
SMART FEATURES	webOS version	webOS 25	webOS 25	webOS 25	webOS 25	webOS 25
	HDMI eARC/ARC	YES (HDMI2)	YES (HDMI2)	YES (HDMI2)	YES (HDMI2)	YES (HDMI2)
HOSPITALITY FEATURES	Quick Menu (Customizable Portal)	YES	YES	YES	YES	YES
	USB Cloning	YES	YES	YES	YES	YES
	Diagnostics	YES (Self Diagnostics(USB))	YES (Self Diagnostics(USB))	YES (Self Diagnostics(USB))	YES (Self Diagnostics(USB))	YES (Self Diagnostics(USB))
	HTNG-CEC (Version)	YES (1.4)	YES (1.4)	YES (1.4)	YES (1.4)	YES (1.4)
	Simplink (HDMI-CEC) (Version)	YES (1.4)	YES (1.4)	YES (1.4)	YES (1.4)	YES (1.4)
	IR Out	YES (RS-232C, ECI)	YES (RS-232C, ECI)	YES (RS-232C, ECI)	YES (RS-232C, ECI)	YES (RS-232C, ECI)
	Multi-code IR	YES	YES	YES	YES	YES
	Welcome Video	YES	YES	YES	YES	YES
	Welcome Screen (Splash Image)	YES	YES	YES	YES	YES
	Insert Image	YES	YES	YES	YES	YES
	External Speaker Out / Line Out	YES / NO	YES / NO	YES / NO	YES / NO	YES / NO
	Port Block	YES	YES	YES	YES	YES
	Lock mode	YES (Limited)	YES (Limited)	YES (Limited)	YES (Limited)	YES (Limited)
	Energy Saving mode	YES	YES	YES	YES	YES
CONNECTIVITY	Rear					
	Optical Digital Audio Out	YES	YES	YES	YES	YES
	HDMI In	Yes (HDMI 1)	Yes (HDMI 1)	Yes (HDMI 1)	Yes (HDMI 1)	Yes (HDMI 1)
	ECI (RJ12)	YES	YES	YES	YES	YES
	Antenna/Cable In (Coax)	YES	YES	YES	YES	YES
	Side					
	HDMI In	YES (HDMI 2, HDMI 3)	YES (HDMI 2, HDMI 3)	YES (HDMI 2, HDMI 3)	YES (HDMI 2, HDMI 3)	YES (HDMI 2, HDMI 3)
	Service Only	YES (3.5mm TRS)	YES (3.5mm TRS)	YES (3.5mm TRS)	YES (3.5mm TRS)	YES (3.5mm TRS)
	USB 2.0	YES	YES	YES	YES	YES
	RS-232C (Control & Service)	YES (3.5mm TRRS)	YES (3.5mm TRRS)	YES (3.5mm TRRS)	YES (3.5mm TRRS)	YES (3.5mm TRRS)
	External Speaker Out / Line Out	Yes (Stereo)	Yes (Stereo)	Yes (Stereo)	Yes (Stereo)	Yes (Stereo)
MECHANICAL	Stand Type	1 Pole (Fixed)	1 Pole (Fixed)	1 Pole (Swivel)	1 Pole (Swivel)	1 Pole (Swivel)
	Front Color	Charcoal Black	Charcoal Black	Charcoal Black	Charcoal Black	Charcoal Black
	VESA Compatible	400 x 400 mm	300 x 300 mm	300 x 300 mm	200 x 200 mm	200 x 200 mm
	Kensington Lock	YES	YES	YES	YES	YES
	Credenza/Security Aperture	NO	NO	YES (Stand Required)	YES (Stand Required)	YES (Stand Required)
	Security Lock Down Plate	NO	NO	YES (Stand Required)	YES (Stand Required)	YES (Stand Required)
	Dimensions with Stand (W x H x D)	66.1 x 41.1 x 14.9 in. 1678 x 1045 x 378 mm	57.2 x 35.8 x 13.4 in. 1454 x 909 x 340 mm	48.6 x 30.6 x 11.9 in. 1235 x 777 x 303 mm	44.1 x 28.1 x 11.9 in. 1121 x 713 x 303 mm	38.1 x 24.5 x 11.9 in. 967 x 623 x 303 mm
	Dimensions without Stand (W x H x D)	TBD	57.2 x 33.0 x 2.3 in. 1454 x 838 x 57.7 mm	48.6 x 28.1 x 2.3 in. 1235 x 715 x 57.5 mm	44.1 x 25.6 x 2.2 in. 1121 x 651 x 57.1 mm	38.1 x 22.2 x 2.2 in. 967 x 564 x 57.1 mm
	Shipping Dimensions (W x H x D)	71.7 x 43.9 x 7.9 in. 1820 x 1115 x 200 mm	63.0 x 38.2 x 6.8 in. 1600 x 970 x 172 mm	53.5 x 31.9 x 6.4 in. 1360 x 810 x 162 mm	47.8 x 30.5 x 6.0 in. 1215 x 775 x 152 mm	41.5 x 26.0 x 5.6 in. 1055 x 660 x 142 mm
	On-Bezel Width (L / R / T / B)	13.9 / 13.9 / 13.9 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm	12.8 / 12.8 / 12.8 / 19.9 mm
	Off-Bezel Width (L / R / T / B)	7.9 / 7.9 / 7.9 / 18.4 mm	6.8 / 6.8 / 6.8 / 18.4 mm	6.9 / 6.9 / 6.9 / 18.4 mm	7.3 / 7.3 / 7.8 / 18.4 mm	6.9 / 6.9 / 6.9 / 18.4 mm
	Weight with Stand	76.3 lbs. / 34.6 kg	50.5 lbs. / 22.9 kg	37.9 lbs. / 17.2 kg	33.7 lbs. / 15.3 kg	26.5 lbs. / 12.0 kg
	Weight without Stand	69.2 lbs. / 31.4 kg	47.4 lbs. / 21.5 kg	30.9 lbs. / 14.0 kg	26.7 lbs. / 12.1 kg	19.4 lbs. / 8.8 kg
	Shipping Weight	98.1 lbs. / 44.5 kg	63.7 lbs. / 28.9 kg	49.2 lbs. / 22.3 kg	41.0 lbs. / 18.6 kg	34.0 lbs. / 15.4 kg
ELECTRICAL	Power Supply	120 Vac, 50/60 Hz	121 Vac, 50/60 Hz	122 Vac, 50/60 Hz	123 Vac, 50/60 Hz	124 Vac, 50/60 Hz
	Max Power Consumption	TBD	TBD	TBD	TBD	TBD
	Typical Power Consumption	TBD	TBD	TBD	TBD	TBD
	Standby Power Consumption	Less than 0.5 W	Less than 0.5 W	Less than 0.5 W	Less than 0.5 W	Less than 0.5 W
WARRANTY & OTHER	Warranty	3 Year Limited	4 Year Limited	5 Year Limited	6 Year Limited	7 Year Limited
	UPC	1 95174 13249 4	1 95174 13303 3	1 95174 13247 0	1 95174 13246 3	1 95174 13248 7
	Regulatory	FCC	FCC	FCC	FCC	FCC
	Remote Control Type	L-Con	L-Con	L-Con	L-Con	L-Con
	Power Cable	YES (1.8M / Straight Type)	YES (1.8M / Straight Type)	YES (1.8M / Straight Type)	YES (1.8M / Straight Type)	YES (1.8M / Straight Type)

PTAC DIRECT SALES, INC.
185 S. KIMBALL AVE., SUITE 130
SOUTHLAKE, TX 76092
877.454.7822
www.PTACdirect.com

* Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.

Life's Good.

#LoveWhatYouSeeLG    @LGforBusinessUSA

Copyright 2025 © LG Electronics USA, Inc., 2000 Millbrook Drive Lincolnshire, IL 60069, USA. All rights reserved. LG and the LG logo are registered trademarks of LG Corp. All other products and brand names are trademarks or registered trademarks of their respective companies. Designs, features, and specifications are subject to change without notice. All screen images are simulated for illustrative purposes only.
 SPEC_UK343H_0126_3,0A

